



www.swarajtractors.com

# NEW **SWARAJ** 724XM ORCHARD WITH NARROW TRACK NOW WORK EASILY




POWER FUEL EFFICIENT ENGINE | 1.06 m OUT-TO-OUT WIDTH FOR ORCHARD & INTER-CULTURE USES  
POWER STEERING | 540 PTO r/min | ADJUSTABLE CHECK CHAIN | BETTER ERGONOMICS FOR MORE COMFORT

Mera  
**SWARAJ**






**1.06 m OUT-TO-OUT WIDTH FOR ORCHARD & INTER-CULTURE USES**

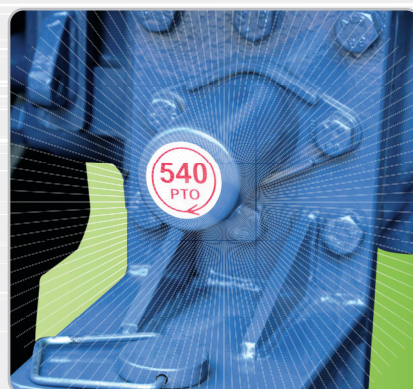


**540 PTO r/min**

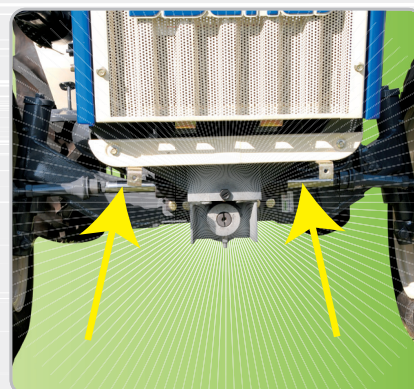

**POWER STEERING**



**ADJUSTABLE CHECK CHAIN**

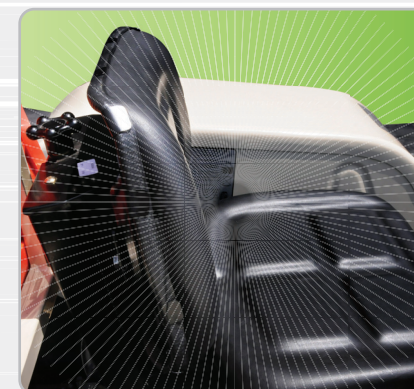

**BETTER ERGONOMICS FOR MORE COMFORT**

#### ENGINE

Model	:	RV2 XM+3A
HP Category	:	18.64-22.37 kW (25-30 HP)
Type	:	4 Stroke, Direct injection, Diesel engine
No. of cylinder	:	2
Bore & Stroke	:	100x116 mm
Displacement	:	1824 cm <sup>3</sup>
Rated engine speed	:	1800 r/min
Air cleaner	:	Dry type, dual element, with dust unloader
Cooling system	:	Water cooled, with no loss tank

#### TRANSMISSION:

Clutch	Standard	:	Single dry disc friction plate (diaphragm type)
	Optional	:	NA
No. of gears		:	6 forwards, 2 reverse speeds

#### GEARS SPEED (km/h) with 127 X 381 mm (5.00 x 15) Front & 241.30 X 609.60 mm (9.50 x 24) Rear type

Forward	:	2.20 to 23.30
Reverse	:	2.20 to 8.70

#### PTO

PTO Speed	Standard	:	540 r/min
	Optional	:	NA

#### BRAKES

Brake type	Standard	:	Oil immersed brakes
	Optional	:	NA

#### STEERING

Steering type	Standard	:	Power steering for better operation & operator's comfort
	Optional	:	NA

#### HYDRAULICS

Hydraulics		:	Live hydraulics A) Position control: To keep lower links on desired height B) Automatic draft control: To keep uniform draft C) Mix control: for maximum work capacity in farm
Lifting capacity	Standard	:	1000 kg on lower link ends
	Optional	:	NA
Linkage		:	3 point linkage, suitable for category-I, Category-II type implement.

#### TYRES

Front tyre	Standard	:	127 X 381 mm (5.00 x 15)
Rear	Standard	:	241.30 X 609.60 mm (9.50 x 24)
Front & rear tyre	Optional	:	NA

#### ELECTRICALS

Electricals	:	12 volt, 75 A battery starter motor & alternator
Instruments	:	Engine r/min hour meter, direction indicators, fuel gauge, ammeter and water temperature gauge & oil pressure indicator

#### WEIGHT & DIMENSION

Total length	:	2900 mm
Total width	:	1092 mm
Total Height	:	1340 mm on steering wheel
Wheel base	:	1550 mm
Minimum ground clearance	:	220 mm
Tractor weight	:	1495 kg
Wheel track	:	Front 940 - 1160 mm Rear 835 - 1265 mm (with 9.50 x 24 tyre size)

#### FEATURES

- Fuel efficient engine as per Bharat Trem-III A criterion
- Power steering with separate steering oil tank
- 540 PTO r/min suitable for PTO operated equipments like sprayers, rotavator
- Rear view mirror
- Live hydraulics
- Hydraulics lifting capacity-1000 kg
- Oil immersed brakes
- Comfortable driver seat with better suspension
- Dry type air cleaner, with dual element, dust collector
- Adjustable vertical & horizontal side draft silencer, suitable for orchards
- (1092 mm) Total rear width, suitable for inter cultivation
- Better wheel traction for farming work
- Adjustable for check chain to control implements movement & crop protection
- Transparent water separator for easy reach & timely water draining

**WARRANTY:** 2 years or 2000 hours, whichever is first.

For product improvements, specifications are subject to change without any prior notice.

**Authorized Dealer:**



#### SWARAJ DIVISION

Phase IV, Industrial Area, S.A.S Nagar (Mohali),  
Punjab - 160055. Phone: 0172 2271620 to 27; 0172 2270820 to 23.  
Website: [www.swarajtractors.com](http://www.swarajtractors.com)