

Ref.: 560212



12 V DC ELECTRIC MOTOR PUMPS FOR ADBLUE/DEF, SOLURA SERIES, 32 L/MIN

Multi-diaphragm pumps with no mechanical seals designed for dispensing AdBlue®/DEF. Pumps are self priming and have a by-pass valve. Electric motors have IP55 protection and include on/off switch, fuse and 2 m cable with crocodile clamps (DC pumps) or plug (AC pumps). Inlet/outlet connection: 1" BSP (M). Maximum suction lift: 1,8 m. Maximum delivery pressure: 1,6 bar. Maximum delivery: up to 32 l/min.

Technical data

Documentation

More information

Compatible fluids	AdBlue/DEF
Maximum free flow delivery	32 l/min (8,5 gal/min)
Delivery	32 l/min (8,5 gal/min)
Maximum outlet pressure	1,6 bar (23,2 psi)
Supply type	12 V DC
Current	22 A
Power	260 w

Technical data

Documentation

More information

Instruction manuals

856807 Instruction book: 12 V DC electric motor pumps for AdBlue/DEF, Solura series, 32 l/min (PDF)


[Download](#)

Technical data

Documentation

More information

mm (in)	560212 / 560224	
A	128 (")	
B	178,5 (7 1/32")	
C	96 (3 25/32")	
D	271 (")	

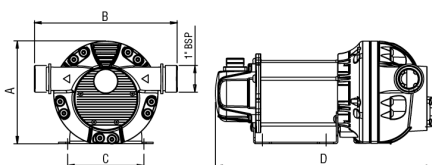

Models

Code	Delivery	Supply Type	Power
560212	32 l/min (8,5 gal/min)	12 V DC	260 w
560230	30 l/min (8 gal/min)	230 V AC	400 w
560224	32 l/min (8,5 gal/min)	24 V DC	310 w
560215	30 l/min (8 gal/min)	120 V AC	500 w