


Installation for Instruction

ITEM NO:LY1206-21

SIZE:38"×38"×75"

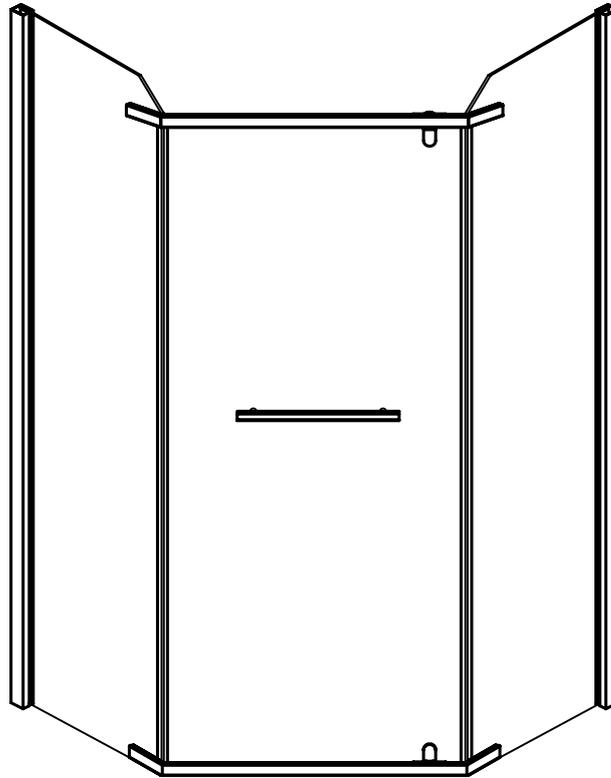

Tools Required




Silicone Sealant



Drill



Level



Rubber Mallet



Pencil



Phillips Screwdriver



Tape Measure



Cutting Pliers




Utility Knife



6mm (1/4") and
3mm (1/8") Drill Bits


** Use the correct type of drill bit for the material being drilled, with 6mm required for anchor fixing and 3mm used for screwing directly into the wall studs.*

Parts List




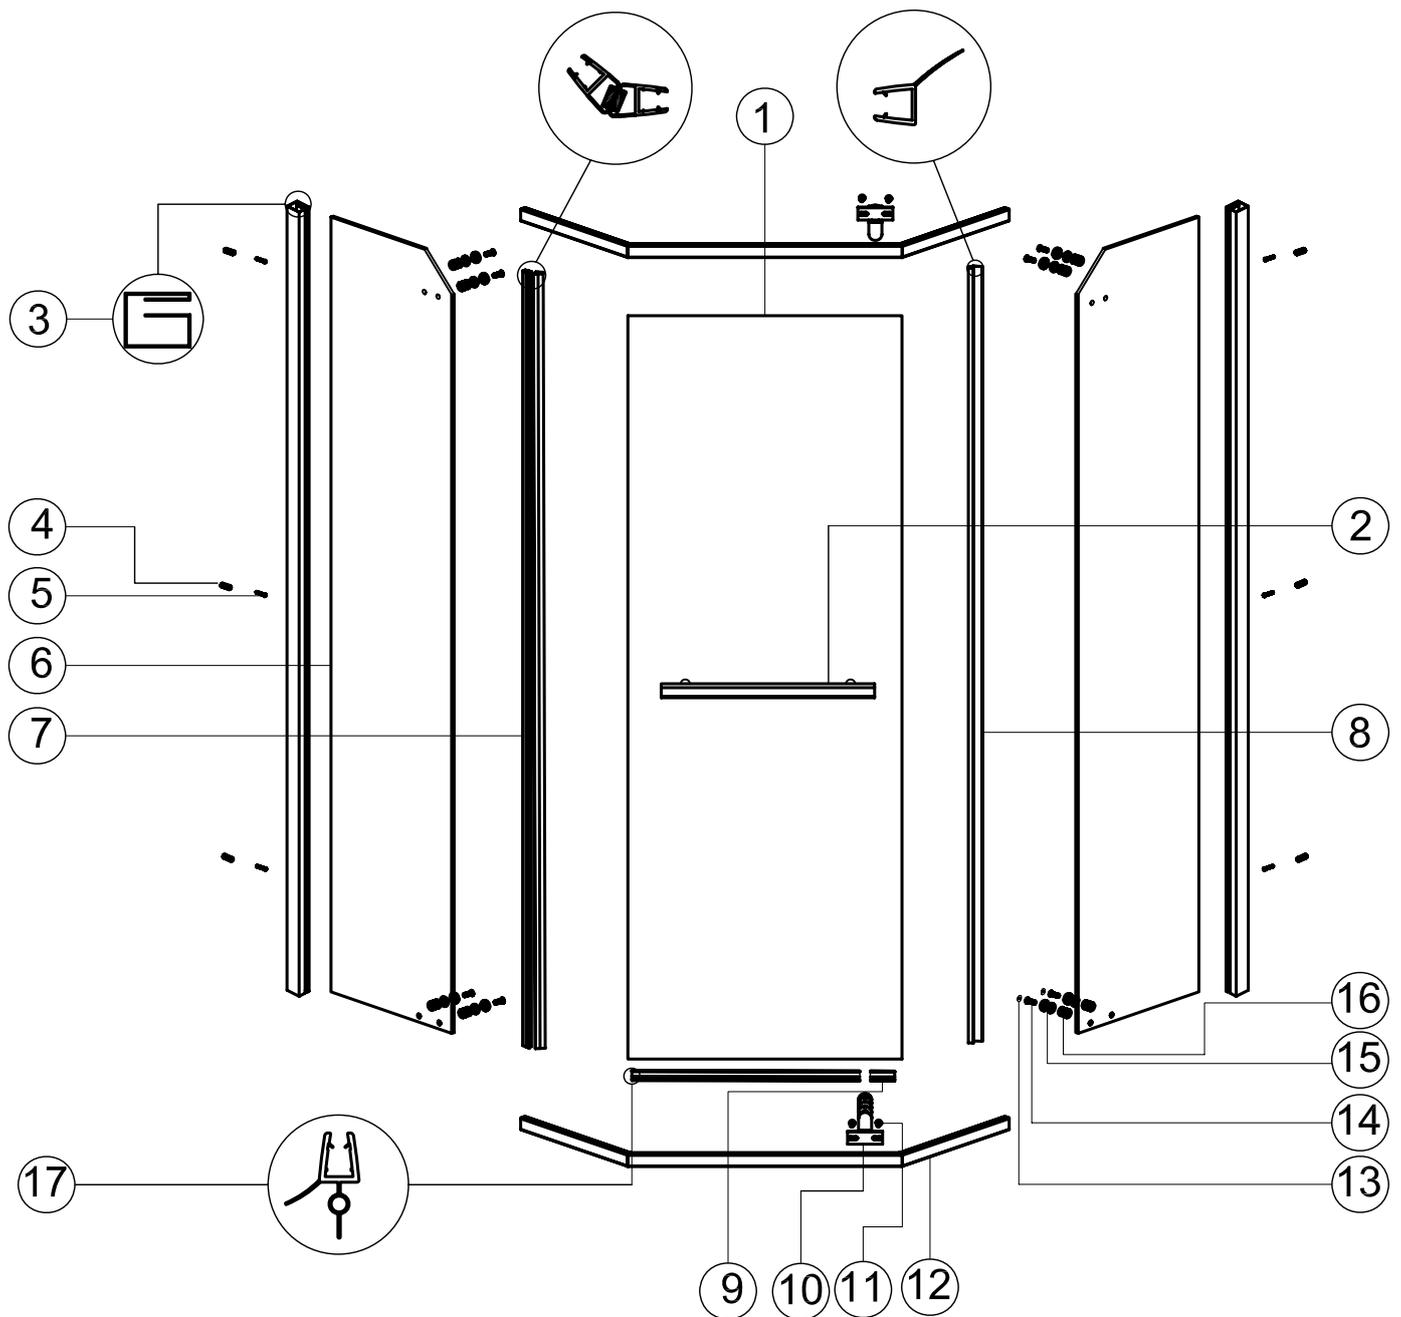


1. Door Glass	1 pcs	12. Brace	2 pcs
2. Handle	1 pcs	13. Allen Head Screw Cover	10 pcs
3. Wall jamb	2 pcs	14. Countersunk Allen Head Screw	8 pcs
4. Wall Anchor	6 pcs	15. Clamping Washer	8 pcs
5. Phillips Head Screw ST4x30	6 pcs	16. Plastic Washer	24 pcs
6. Side Panel Glass	2 pcs	17. Long Drip Strip	1 pcs
7. Magnetic Door Seal	2 pcs		
8. Hinge Side Door Seal	1 pcs		
9. Short Drip Strip	1 pcs		
10. Hinge Assembly	2 pcs		
11. Allen Head Screw M8x15	4 pcs		


1

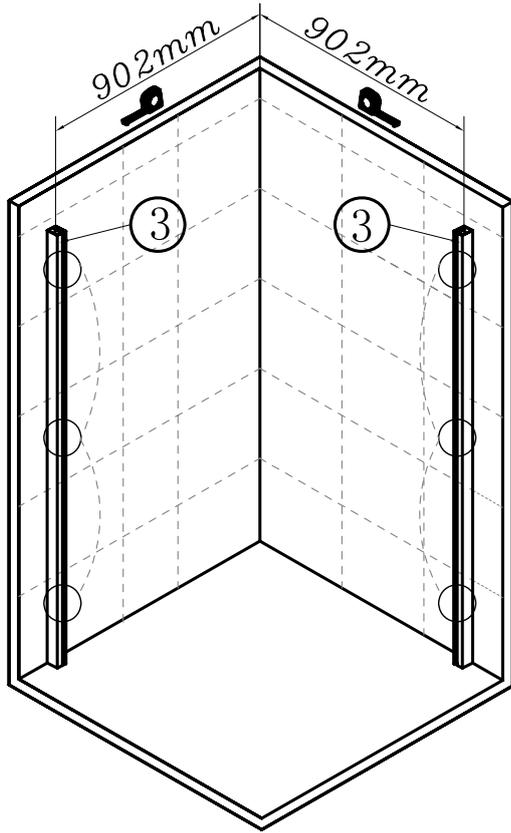


Install the Wall jamb.

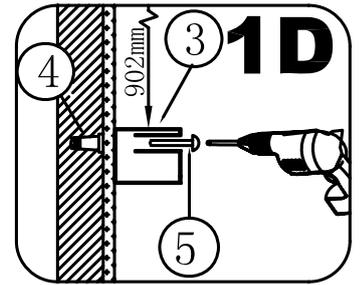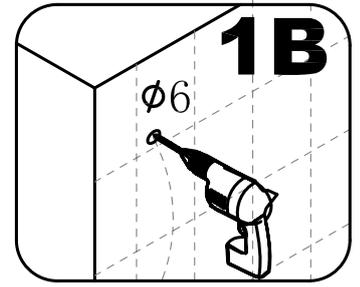


2

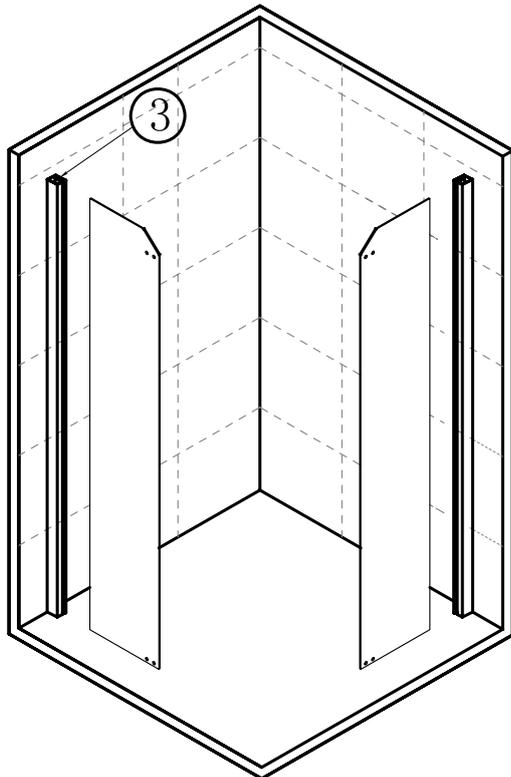


Install the Side Panel Glass.

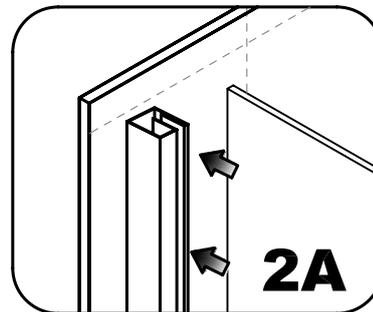


3

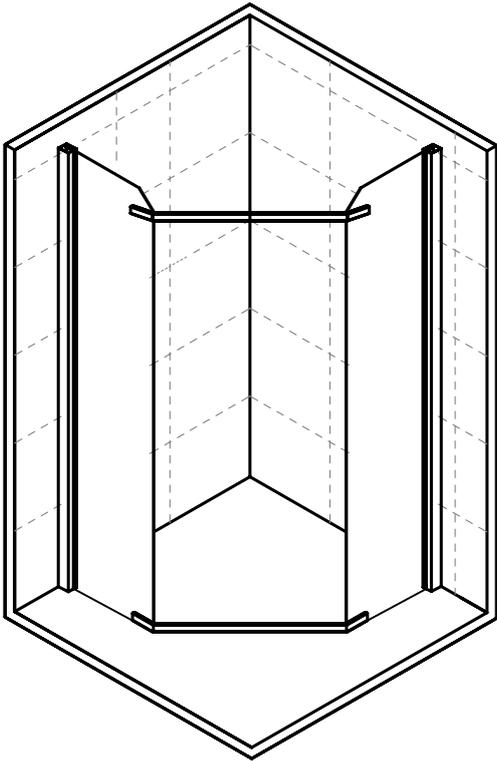


Fit metal brace to the top and bottom.




Attach the top hinge to the top brace.





Install the bottom door hinge on the brace.




Install the top hinge to the door.




Install the door onto the bottom hinge.



4

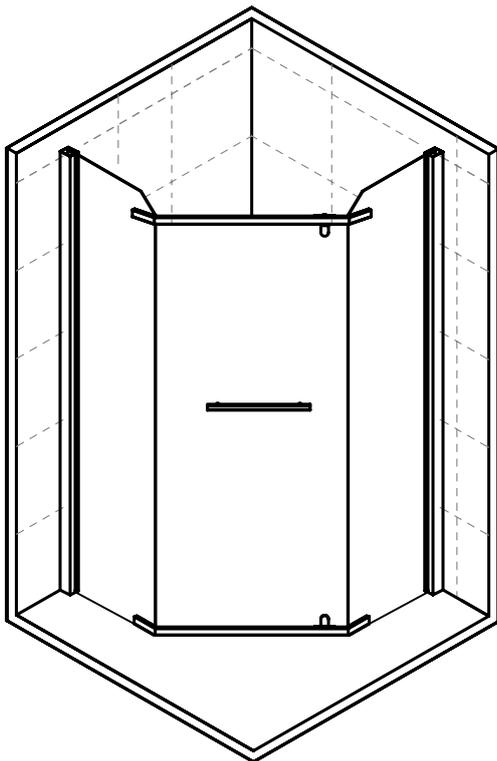


Install the Handle.





5



Note steps 5B to 5D show the seals being installed on the door with the frame removed for clarity.

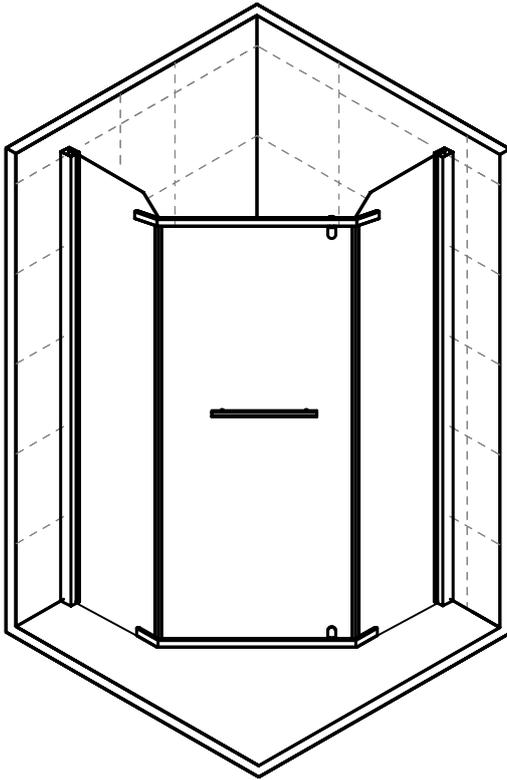


Cut the seals to the correct length before fitting.

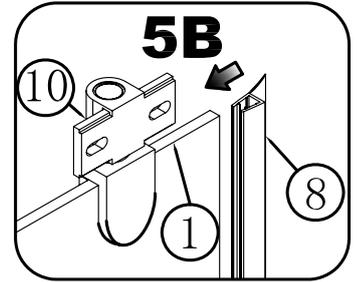

Install the vertical door seals along the whole height of the door, and fit the bottom drip strips in between.

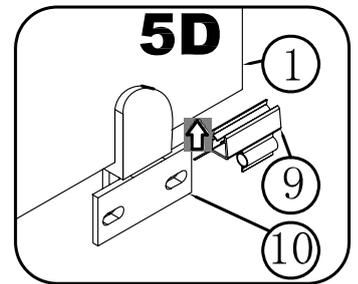

6

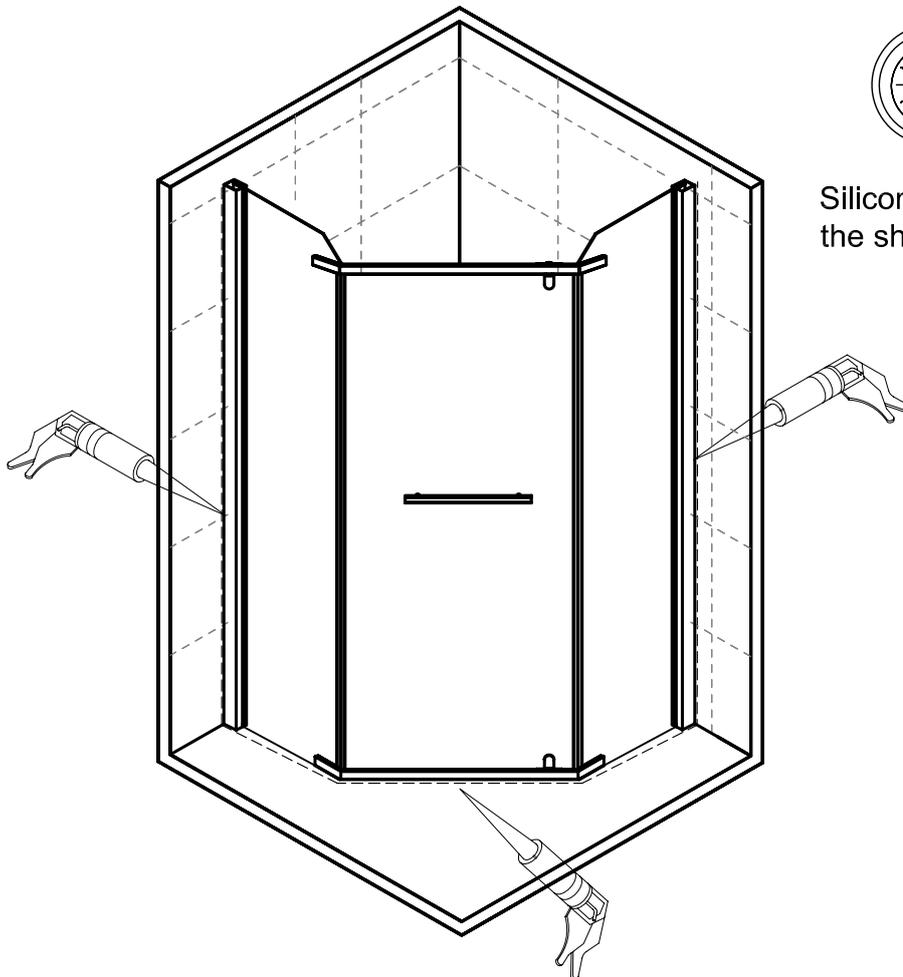

24 h





Silicone inside and outside of the shower.



Please read this instructions before installation.

Precautions before installation.

- The shower room should be installed by professionals according to instructions. Otherwise, the shower room may be unstable or fall down which will lead to product broken or people injured.
- Count the object quantity. The glasses must be moved by two people. Put a soft and non-slip object under the glass and stand the glass against a wall smoothly. It will make the glass broken if it is placed in horizontal position. Pay attention to avoid hitting the four corners of the glass.
- Don't strongly knock the glass to avoid being broken.
- Before install the shower room, read the instructions carefully and know well about the tooling and installation sequence.
- It can be used and clean after 24 hour installation.



24 H

Maintenance and repair

- 1、 Don't let children, older people or activity restricted people go into the shower room alone.
- 2、 Don't climb,lean against or hang something heavy on the shower room.
- 3、 Don't be rubbed or knocked by hard object, in case to cause broken.
- 4、 Don't make the burning cigarette near the shower room, and don't leave cigarette ash in the shower room. The burning flame will destroy the spray and glass, so it must keep away from fire.
- 5、 Before entering the shower room, pay attention the height of the falling in order to avoid getting tripped.
- 6、 Before entering the shower room, don't put the hand into the crack of the door,in case any injured occur.
- 7、 The soap suds in the shower room will make people slip very easily, Be careful not to slip.
- 8、 The shower room should be kept in good ventilation, in case to avoid leaving the moisture long stay in the shower room, and cause mildew and bad smell.
- 9、 Regularly clean the sliding rail, sliding wheel and sliding lump, add lubricant (lubricant oil or lubricant wax).
- 10、 Regularly adjust the screw of sliding wheel, sliding lump to make sure the effective load bearing and good sliding position of the moving door.
- 11、 Please use neutral liquid detergent and smooth fabric to clean the shower door. Don't use any acidity, alkaline detergent,thinner, alcohol, acetone and any stronge detergent.
- 12、 When dirty water appear on the water retaining stone, you can wipe it with a little toothpaste by wet fabric.
- 13、 It will be leaking if the glass seal is dropped. So please make it up when dropped.

