


Safety Glass code requirements

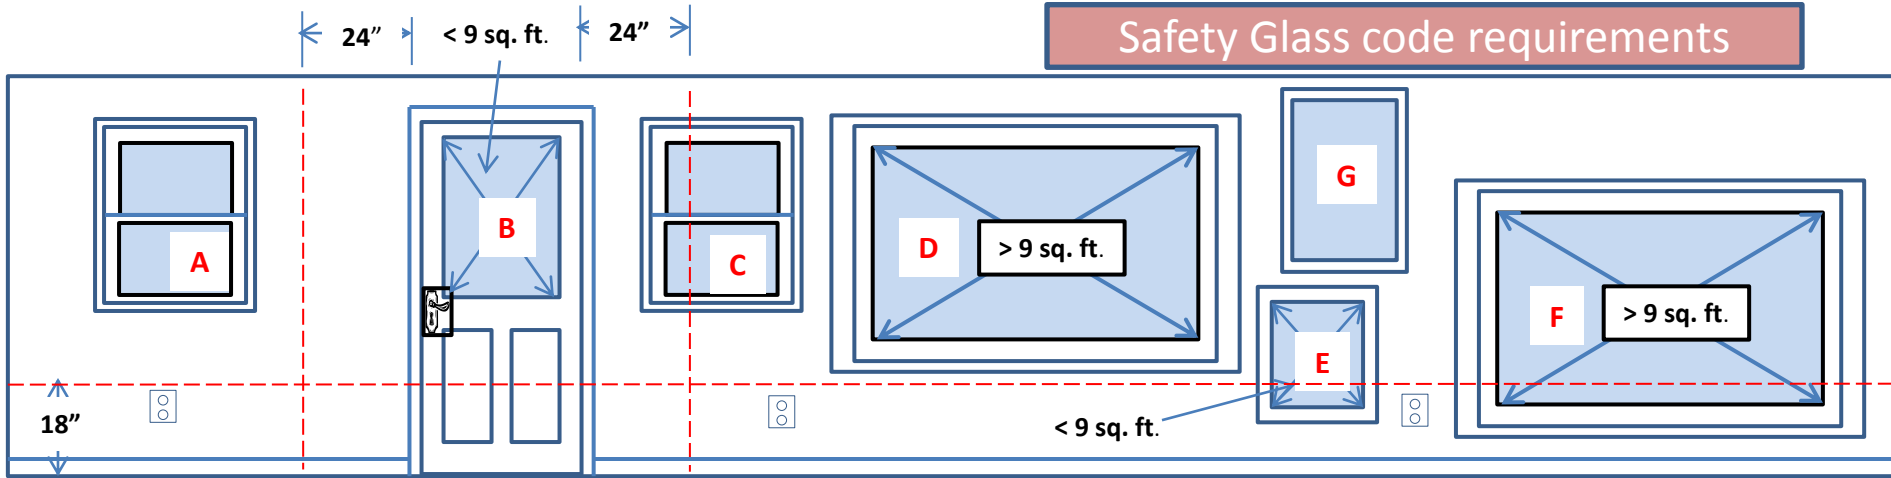

Observation

Difference between both

Reason for safety glass

Window **A** + **C** same size and height off floor .

Window **D** + **F** same size , different heights

Window **E** + **F** are same height off floor (less then 18")

Glass **B** + **G** are same size , < 9 sq. ft. & more then 18 " off floor

Window **A** + **H** are same size and same height off floor

Windows **H** + **I** are both in tub area.

Window **J** + **L** are same size & less then 24" from door.

Window **N** + **O** are same size & height off floor

Window **M** + **N** + **O** same size .Window **M** higher off floor

If Window **M** or **H** was a single hung style window opposed to double hung style widow

Window **A** not required to be safety glass , Window **C** required

Window **D** not required to be safety glass ,Window **F** required.

Window **E** is not required to be safely glass , Window **F** required

One is a window and 1 is for a door . Glass **B** required

Window **A** not required to be safety glass , Window **H** required

Window **I** not required to be safety glass , Window **H** required

Window **j** not required to be safety glass . Window **L** required.

Window **O** not required to be safety glass , Window **N** required

Window **O** not required to be safety glass ,Window **M** + **N** required.

Top sash stationary opposed to operable

Within 24" from exterior door
Combination of > then 9 sq. ft. and less then 18" off floor
> then 9 sq. ft.

All entrance doors required to have safety glass
Combination of in a tub and less then 60" off floor
less then 60" above floor in a tub

Combination of within 24" radius with no permanent barrier

Within 60" floor landing (horizontal)

Within 60" floor landing of steps

Only Lower sash required to be safety glass.

