

2-Way Power Divider - 0°


Model PD20180D2S

Specifications.

Frequency Range	2~18GHz	Finish	Black paint
Insertion Loss	≤1.2dB (Above 3.0dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.50:1 Output ≤1.50:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥16dB	Connector Pin	Stainless Steel SMA-Female
Amplitude Balance	≤±0.3dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-40°C~+85°C
¹Power Handling	Forward ≤30Watt; Reversed ≤0.5Watt	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	100g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.40:1.

Mechanical Outline.

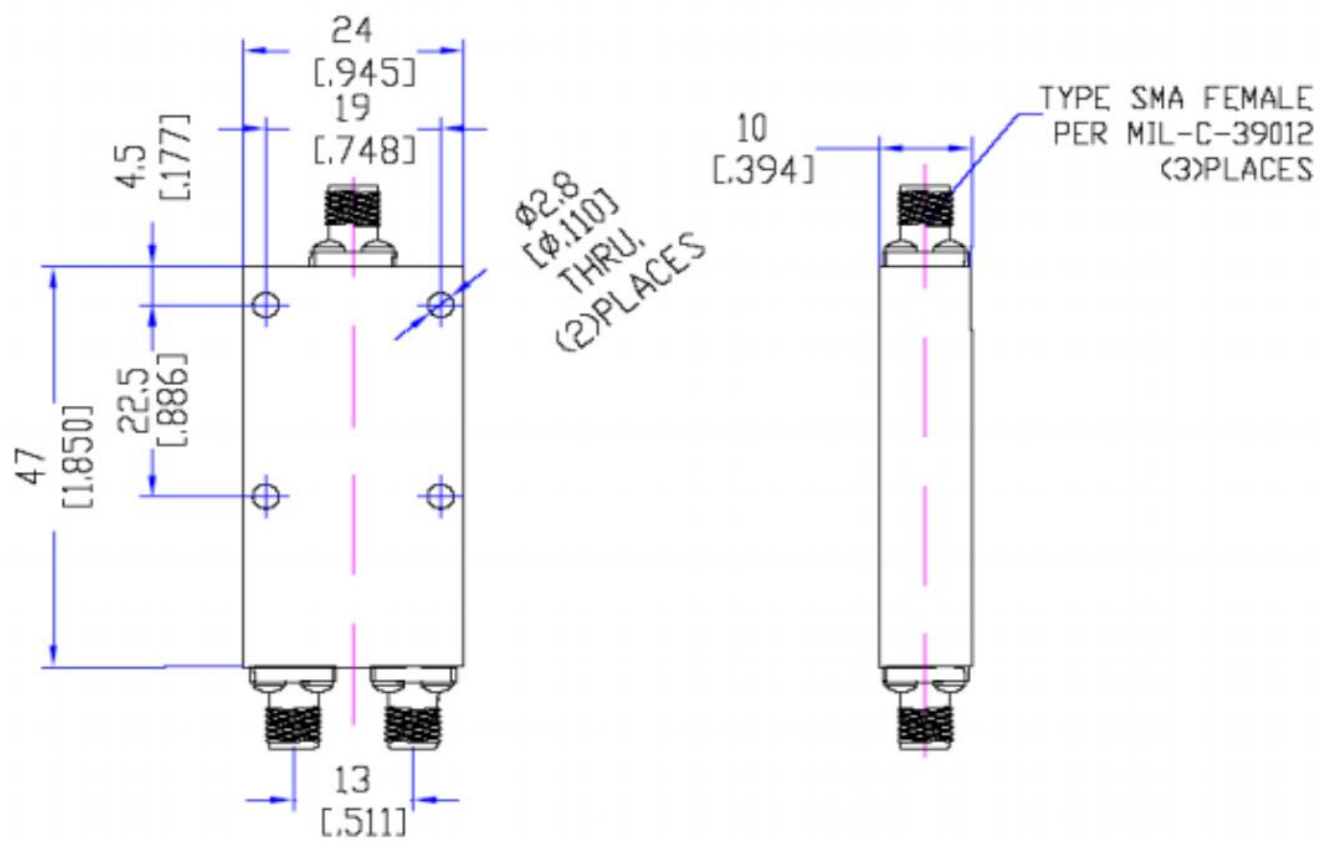

Note: Dimensions (mm / [inch]), General tolerance (± 0.5 / [± 0.02])