



Payment Terminal Expert AND Partner



Shenzhen Trendit Technology Co., Ltd.

Hardware Product

Smart POS Terminal

Android POS S11
Android POS S680

Smart POS Terminal

Android POS S10
Android POS S10 Pro
S10 Dock
Android POS T3A

Kiosk

Cash Register C1
Cash Register C2
Cash Register C3
Cash Register C4
Kiosk U1
Kiosk U2

Traditional POS

Traditional POS T3
T3 Dock
Traditional POS T3+

IOT Products


Soundbox P5 Dynamic
Soundbox P5 Static
Cloud Printer P8

Cash Register

Cash Register C1
Cash Register C2



TRENDIT S11

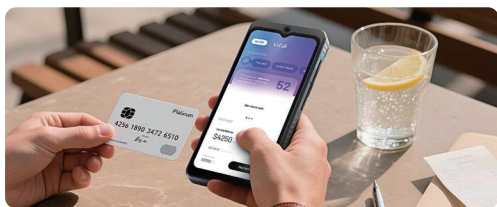






















Specification

<p>OS Android 14</p>	<p>Processor Quad-core Cortex A53 2.0GHz +Secure processor</p>	<p>Memory RAM: 2GB(Optional 4GB) Flash: 32GB (Optional 16GB/64GB) Micro SD Card up to 128GB</p>	<p>Display 6.5" HD+ Display, 1600*720 Pixels</p>
<p>Camera Front Camera: 16MP (Optional 13MP/8MP/5MP/2MP) Top Side Camera: 5MP (Optional 2MP/8MP/13MP/16MP)</p>	<p>Card Reader Magnetic Card Reader Smart Card Reader Contactless card Reader</p>	<p>Card Slot 2*SIM 1*PSAM 1*SD Card</p>	<p>Battery 5000mAh /3.85V</p>
<p>Scanner M101P Optional M104</p>	<p>keys 1*Power Key 1*Function Key</p>	<p>Audio Speaker, Mic(Optional Dual Mic)</p>	<p>Communications 4G/3G/2G Bluetooth 5.0 Wi-Fi 2.4GHz /5GHz</p>
<p>GNSS GPS/AGPS/GILONASS BeiDou/Gellileo</p>	<p>Dimensions 176*81*19mm L*W*H</p>	<p>Weight 285g</p>	<p>Peripheral Ports 1*USB Type-C, Optional(POGO PIN)</p>
<p>Accessory Power Adapter USB Cable User Manual</p>	<p>Power Supply Input: 100V-240V 50/60Hz Output: 5V/2A</p>	<p>Optional Configurations Output Charging: 9V/2A 1*Esim Wrist Strap Bracket: 1*Type C 1*RJ12(RS232) 1*RJ45 1*DC </p>	
<p>Environmental Operating Temperature: -10°C-50°C Storage Temperature: -20°C-70°C Relative Humidity: 5%-95%, Non-condensing</p>	<p>Certifications PCI 6.X EMV Contact L1&L2 EMV Contactless L1 Mastercard PayPass VISA PayWave CE RoHS </p>		

TRENDIT S680



Specification

 OS Android 10	 Processor Quad-core Cortex A53 1.4GHz + Secure processor	 Memory RAM: 1GB(Optional 2GB) Flash: 8GB (Optional 16GB) Micro SD Card up to 128GB	 Display 6" HD+ Display, 1440*720 Pixels Multi-Point Capacitive Touchscreen
 Camera 2MP Front Camera 5MP Rear Camera	 Card Reader Magnetic Card Reader Smart Card Reader Contactless card Reader	 Card Slot 2*SIM 1*PSAM 1*SD Card	 Battery 5000mAh 3.7V
 Printer Thermal Printer Paper Width: 58mm Diameter: 40mm	 keys 1*Power Key 2*Volume Key	 Audio Speaker, Mic	 Communications 4G/3G/2G Bluetooth 4.2 Wi-Fi 2.4GHz
 GNSS GPS/AGPS/GILONASS (Optional BeiDou)	 Dimensions 219*81*63mm L*W*H	 Weight 394g	 Peripheral Ports 1*USB Type-C
 Accessory Power Adapter USB Cable User Manual	 Power Supply Input: 100V-240V 50/60Hz Output: 5V/2A	 Optional Configurations Double frequency GPS	 Certifications PCI & X EMV Contact L1&L2 EMV Contactless L1 Mastercard PayPass VISA PayWave TQM JCB American Express Discover D-PAS Pure Card Union Pay MIR Quickpass NAPAS CE RoHS
 Environmental Operating Temperature: -10°C~50°C Storage Temperature: -20°C~70°C Relative Humidity: 5%~95%, Non-condensing			

TRENDIT S10



Specification



OS

Android 14



Processor

Quad-core Cortex A53
2.0GHz + Secure processor



Memory

RAM: 2GB(Optional 4GB)
Flash: 32GB (Optional 16GB/64GB)
Micro SD Card up to 128GB



Display

6.5" HD+ Display, 1600*720 Pixels
Multi-Point Capacitive Touchscreen
2.4 Sub-display, 320*240 Pixels



Camera

Front Camera: 16MP (Optional 13MP/
8MP/5MP/2MP)
Top Side Camera: 5MP (Optional 2MP)



Card Reader

Magnetic Card Reader
Smart Card Reader
Contactless card Reader



Card Slot

2*SIM
1*PSAM
1*SD Card



Battery

2500mAh /7.6V



Printer

Thermal Printer
Paper Width:58mm
Diameter:40mm



keys

1*Power Key
1*Function Key



Audio

Speaker, Mic(Optional Dual Mic)



Communications

4G/3G/2G
Bluetooth 5.0
Wi-Fi 2.4GHz /5GHz



GNSS

GPS/AGPS/GILONASS
BeiDou/Gellileo



Dimensions

194*81*61mm L*W*H



Weight

413g



Peripheral Ports

1*USB Type-C



Accessory

Power Adapter
USB Cable
User Manual



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A



Optional Configurations

Output Charging: 9V/2A
Battery(2500mAh 7.6V | 3000mAh 7.6V | 2500mAh 7.4V-Low temperature)
1*Esim
Sub-display Touchscreen
Dock station : 2*Type A | 1*Type C | 1*RJ11 | 1*RJ45
Wrist Strap
Optional Remove The Sub-display
USB HUB (USB 2.0)



Certifications

PCI 6.X | EMV Contact L1&L2 | EMV Contactless L1 | Mastercard PayPass
| VISA PayWave | American Express | Discover D-PAS | Pure Card | MIR | CE | RoHS |

TRENDIT S10 Pro



Specification



OS

Android 14



Processor

Octa-core 2 x Cortex-A75
2.0GHz+6 x Cortex-A55 1.8GHz
+Secure processor



Memory

RAM: 2GB(Optional)4GB /6GB /8GB)
Flash: 32GB (Optional)16GB/64GB/128GB)
Micro SD Card up to 128GB



Display

6.5" HD+ Display, 1600*720 Pixels
Multi-Point Capacitive Touchscreen
2.4 Sub-display, 320*240 Pixels



Camera

Front Camera: 16MP (Optional
13MP/8MP/5MP/2MP) Top Side
Camera: 5MP (Optional 2MP)



Card Reader

Magnetic Card Reader
Smart Card Reader
Contactless card Reader



Card Slot

2*SIM
1*PSAM
1*SD Card



Battery

2500mAh /7.4V



Printer

Thermal Printer
Paper Width:58mm
Diameter:40mm



keys

1*Power Key
1*Function Key



Audio

Speaker, Mic(Optional Dual Mic)



Communications

4G/3G/2G
Bluetooth 5.0
Wi-Fi 2.4GHz /5GHz



GNSS

GPS/AGPS/GILONASS
BeiDou/Gellileo



Dimensions

194*81*61mm L*W*H



Weight

413g



Peripheral Ports

1*USB Type-C, Optional(POGO PIN)



Accessory

Power Adapter
USB Cable
User Manual



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A



Optional Configurations


Output Charging: 9V/2A
Battery(2500mAh 7.6V | 3000mAh 7.6V | 2500mAh 7.4V-Low temperature)
1*Esim
Sub-display Touchscreen
Dock station: 2*Type A(1*Type C(1*RU11(1*RU45)
Wrist Strap
Optional Remove The Sub-display
Fiscal Module
USB HUB (USB 2.0)




Certifications

PCI 6.X | EMV Contact L1&L2 | EMV Contactless L1 | Mastercard PayPass
| VISA PayWave | American Express | Discover D-PAS | Pure Card | MIR | CE | RoHS

S10 DOCK



USB-A Type-C RJ45 RJ11



Specification



Connections

POGO PIN, Power Supply
and Communications



Peripheral Ports

2*Type A
1*Type C
1*RJ11(RS232)
1*RJ45



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A




Dimensions

167*89*55mm L*W*H



Android POS T3A

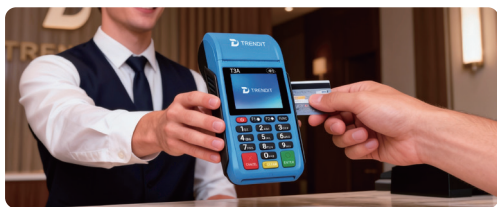

Specification



OS

Android 12



Processor

Quad-core Cortex A53
1.4GHz + Secure processor



Memory

RAM: 1GB(Optional 2GB)
Flash: 8GB (Optional 16GB)
Micro SD Card up to 128GB



Display

2.4" Inch Display, 320*240 Pixels
Multi-Point Capacitive Touchscreen



Camera

0.3MP



Card Reader

Magnetic Card Reader
Smart Card Reader
Contactless card Reader



Card Slot

2*SIM
1*PSAM
1*SD Card



Battery

2500mAh /3.7V



Printer

Thermal Printer
Paper Width: 58mm
Diameter: 40mm



keys

10*Numerical Key
1*Power Key
6*Function key



Audio

Speaker



Communications

4G/3G/2G
Bluetooth 4.2
Wi-Fi 2.4GHz



GNSS

GPS/AGPS/BeiDou/
Optional GLONASS



Dimensions

163*80*59mm L*W*H



Weight

288g



Peripheral Ports

1*USB Type-C



Accessory

Power Adapter
USB Cable
User Manual



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/1A



Optional Configurations

2.8" Inch Display, 320*240 Pixels
Multi-Point Capacitive Touchscreen
Battery 5000mAh/3.7V



Environmental

Operating Temperature: -10°C-50°C
Storage Temperature: -20°C-70°C
Relative Humidity: 5%-95%, Non-condensing



Certifications

PCI 6.X | EMV Contact L1&L2 | EMV Contactless L1 |
Mastercard PayPass | VISA PayWave | MIRI | CE | RoHS |

Traditional POS T3



Specification



OS

Linux



Processor

Quad-core Cortex A35
1.3GHz + Secure processor



Memory

RAM: 128MB(Optional 256MB)
Flash: 128MB (Optional 256MB)
Micro SD Card



Display

2.4" Inch Display, 320*240 Pixels
Electronic Signature Touchscreen



Camera

0.3MP(Optional)



Card Reader

Magnetic Card Reader
Smart Card Reader
Contactless Card Reader



Card Slot

2*SIM
1*PSAM



Battery

2500mAh /3.7V



Printer

Thermal Printer
Paper Width: 58mm
Diameter: 40mm



keys

10*Numerical Key
1*Power Key
6*Function key



Audio

Speaker



Communications

4G Only
Wi-Fi 2.4GHz



GNSS

AGPS



Dimensions

163*80*59mm L*W*H



Weight

302g



Peripheral Ports

1*USB Type-C



Accessory

Power Adapter
USB Cable
User Manual



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/1A



Optional Configurations

Network 4G +2G
Wi-Fi 2.4GHz/5GHz
Bluetooth 4.2
1*SIM+1*PSAM (Optional)
3000mAh/3.7V



Certifications

PCI 6.X | EMV Contact L1&L2 | EMV Contactless L1 | Mastercard PayPass
| VISA PayWave | Quickpass | Expresspay | CE | RoHS |


T3 DOCK



Type-A

Type-C

RJ45



Specification



Connections

POGO PIN, Power Supply
and Communications



Peripheral Ports

2*Type A
1*Type C
1*RJ11 (RS232)
1*RJ45



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A



Dimensions

167*89*55mm L*W*H



Traditional POS T3+



Specification



OS
RTOS



Processor
32-Bit Arm® Cortex®-M0 Up
to 256MHz+ Secure processor



Memory
RAM: 8MB
Flash: 12MB (Optional 20MB)
SD Card



Display
2.4" Inch Display, 320*240 Pixels
Electronic Signature Touchscreen



Camera
0.3MP(Optional)



Card Reader
Magnetic Card Reader
Smart Card Reader
Contactless Card Reader



Card Slot
2*SIM
1*PSAM



Battery
2500mAh /3.7V



Printer
Thermal Printer
Paper Width: 58mm
Diameter: 40mm



Keys
10*Numerical Key
1*Power Key
6*Function Key



Audio
Speaker



Communications
4G Only



GNSS
AGPS



Dimensions
163*80*59mm L*W*H



Weight
283g



Peripheral Ports
1*USB Type-C



Accessory
Power Adapter
USB Cable
User Manual



Power Supply
Input: 100V-240V 50/60Hz
Output: 5V/1A



Optional Configurations
Optional Wi-Fi 2.4GHz
1*SIM*1*PSAM (Optional)
3000mAh/3.7V



Certifications
PCI 6.X | EMV Contact L1&L2 | EMV Contactless L1 |
Mastercard PayPass | VISA PayWave | CE | RoHS |



Environmental
Operating Temperature: 0°C-50°C
Storage Temperature: -20°C-70°C
Relative Humidity: 5%-95%, Non-condensing

Soundbox P5 Dynamic



Specification



OS

Trendit OS



Processor

ARM Cortex-R5



Memory

RAM: 4MB
Flash: 16MB (Optional 4MB)



Display

2.4" Inch Display, 320*240 Pixels
Sub-display Segment Display
(Dot Matrix Display)



Battery

2000mAh /3.7V



Keys

1*Power Key
1*Function Key
2*Volume Key
Digital Keypad base (Optional)



Audio

3W Speaker



Card Slot

1* Micro SIM



Communications

4G Only
Optional Wi-Fi 2.4GHz



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/1A



Dimensions

135*97*29mm L*W*H



Weight

292g



Peripheral Ports

1*USB Type-C



Accessory

Power Adapter
USB Cable
User Manual



Environmental

Operating Temperature: -10°C-50°C
Storage Temperature: -20°C-70°C
Relative Humidity: 5%-95%, Non-condensing



Certifications

CE | RoHS | BIS | WPC

Soundbox P5 Static



Specification



OS

Trendit OS



Processor

ARM Cortex-R5



Memory

RAM: 4MB
Flash: 16MB (Optional 4MB)



Display

Segment Display



Battery

2000mAh /3.7V (Li-18650)



keys

1*Power Key
1*Function Key
2*Volume Key
Digital Keypad base (Optional)



Audio

3W Speaker



Card Slot

1* Micro SIM



Communications

4G Only
Optional Wi-Fi 2.4GHz



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/1A



Dimensions

135*97*29mm L*W*H



Weight

216g



Peripheral Ports

1*USB Type-C



Accessory

Power Adapter
USB Cable
User Manual



Environmental

Operating Temperature: -10°C-50°C
Storage Temperature: -20°C-70°C
Relative Humidity: 5%-95%, Non-condensing



Certifications

CE|RoHS|BIS|WPC

Cloud Printer P8



Specification



OS

Trendit OS



Processor

ARM Cortex-R5



Memory

RAM: 640KB
Flash: 8MB



Printer

High Speed thermal printer
Paper roll: 58*80mm



Keys

1*Power Key
1*Function Key
2*Volume Key



Audio

3W Speaker



Card Slot

1* Micro SIM



Communications

4G Only | Wi-Fi 2.4G
(Optional 2.4GHz/5GHz)



Power Supply

Input: 100V-240V 50/60Hz
Output: 9V/1.5A



Dimensions

138*123*113mm L*W*H



Weight

540g



Peripheral Ports

1*USB Type-C
1*DC



Accessory

Power Adapter
User Manual



Environmental

Operating Temperature: -10°C~50°C
Storage Temperature: -20°C~70°C
Relative Humidity: 5%-95%, Non-condensing

Cash Register C2



Specification



OS
Android 11



Processor
Quad-core 64-bit Cortex-A53,
Up to 1.8 GHz



Memory
RAM:4GB
Flash:32GB(Optional 64GB)



Display
Main Display: 15.6" HD+,
1920*1080 Capacitive,
Multi-point TouchScreen
Sub-Display: 10.1 Inch 800*1280



Peripheral Ports
1*RJ12
1*RJ11
4*USB-A
1*RJ45
1*DC-IN



keys
Virtual buttons
Power Key



Audio
3W Speaker



Communications
Wifi 2.4GHz/5GHz
Bluetooth 5.1



Power Supply
Input: AC100-240
Output: DC12V 2A



Dimensions
363*202*344mm L*W*H




Accessory
Power Adapter
User Manual



Environmental
Operating Temperature: 0°C-45°C
Storage Temperature: -20°C-60°C
Relative Humidity: 5%~95%, Non-condensing

Cash Register C3

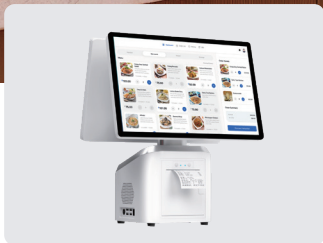

Specification



OS
Android 11



Processor
Quad-core 64-bit Cortex-A55,
Up to 2.0 GHz



Memory
RAM:2GB (Optional 4GB, 8GB)
Flash:32GB (optional 64GB, 128GB)



Display
Main Display: 15.6" HD+,1920*1080
Capacitive, Multi-point TouchScreen
Sub-Display: 8-bit LED digital
display/11.6 inch / 15.6inch



Audio
3W Speaker



keys
Virtual buttons
Power Key



Communications
Wifi 2.4GHz/5GHz
Bluetooth 4.2



Peripheral Ports
1*Power interface, 1*RJ11,
1*DC, 1*USB, 1*RJ45



Power Supply
Input: AC100-240
Output:DC12V/ 2A



Demensions
363*202*344mm L*W*H



Printer
Thermal Printer with 80mm paper




Accessory
Power Adapter
User Manual



Environmental
Operating Temperature:0°C-45°C
Storage Temperature:-20°C-60°C
Relative Humidity:5%-95%, Non-condensing

Cash Register C4

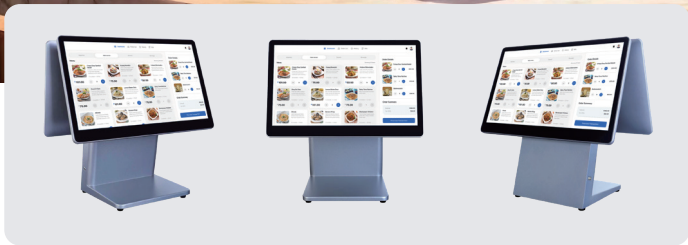

Specification



OS
Android 11



Processor
Quad-core 64-bit Cortex-A55,
Up to 2.0 GHz



Memory
RAM:2GB (Optional 4GB, 8GB)
Flash:32GB (optional 64GB, 128GB)



Display
Main Display: 15.6" HD+,1920*1080
Capacitive, Multi-point TouchScreen
Sub-Display: 8-bit LED digital
display/11.6 inch / 15.6inch



Audio
3W Speaker



keys
Virtual buttons
Power Key



Communications
Wifi 2.4GHz/5GHz
Bluetooth 4.2



Peripheral Ports
1*Power interface, 1*RJ11,
1*DC, 16*USB, 1*RJ45



Power Supply
Input: AC100-240
Output:DC12V/ 2A



Demensions
363*202*344mm L*W*H



Printer
Thermal Printer with 80mm paper



Accessory
Power Adapter
User Manual



Environmental
Operating Temperature:0°C-45°C
Storage Temperature:-20°C-60°C
Relative Humidity:5%-95%, Non-condensing

Kiosk U1



Specification

OS
Android 11

Processor
Quad-core 64-bit Cortex-A55,
Up to 2.0 GHz

Memory
RAM: 2GB(Optional 3GB/4GB) |
Flash: 32GB (Optional 64GB/128GB)
Micro SD Card up to 128GB

Display
21.5" HD+ Display, 1080*1920 Pixels
Multi touch capacitive screen

Peripheral Ports
1*DC
1*RJ45
2*USB
1*HDMI
1*TF
1*3.5mm audio interface

Communications
Bluetooth 4.0
Wi-Fi 2.4GHz /5GHz

Power Supply
Input: 100V-240V 50/60Hz
Output: 12V/5A

Camera
With Built-in 5-megapixel
Eyecool Camera (Optional)
Built-In Scanner (Optional)

Printer
Built-in 80mm printer












Indicator light
Equipped with a blue power
on indicator light

Environmental
Operating Temperature:0°C-50°C | Storage Temperature:-20°C-70°C
Relative Humidity:5%-95%, Non-condensing

Kiosk U2




Specification

- 
OS
 Android 11
- 
Processor
 Quad-core 64-bit Cortex-A55, Up to 2.0 GHz
- 
Memory
 RAM: 2GB(Optional 3GB/4GB)
 Flash: 32GB (Optional 64GB/128GB)
 Micro SD Card up to 128GB
- 
Display
 21.5" HD+ Display, 1080*1920 Pixels
 Multi touch capacitive screen
- 
Printer
 Built-in 80mm printer
- 
Indicator light
 Equipped with a blue power on indicator light
- 
Communications
 Bluetooth 4.0
 Wi-Fi 2.4GHz /5GHz
- 
Peripheral Ports
 1*DC
 1*RJ45
 2*USB
 1*HDMI
 1*TF
 1*3.5mm audio interface
- 
Power Supply
 Input: 100V-240V 50/60Hz
 Output: 12V/5A
- 
Camera
 With Built-in 5-megapixel Eyecool Camera (Optional)
 Built-In Scanner (Optional)
- 
Environmental
 Operating Temperature: 0°C-50°C
 Storage Temperature: -20°C-70°C
 Relative Humidity: 5%-95%, Non-condensing

Certifications





 400-8676-528

 sales@trenditen.com

 www.trenditen.com

Shenzhen Trendit Technology Co., Ltd.

30F, 1A Building International Innovation Valley, Dashi 1st Road, Xili Street,
Nanshan District, Shenzhen City, Guangdong Province, China



LinkedIn



Instagram



Twitter



Facebook