

4MP IP COLOR BOX CAMERA

IPRGMIRL400



High Quality CCTV Solutions

- ✓ Image Sensor: 1/2.8" Sony Starvis Black-illuminated CMOS Sensor
- ✓ Min. Illumination: 0.01 Lux
- ✓ Day & Night Function
- ✓ Wide Dynamic Range (WDR): 120dB
- ✓ Tri Stream
- ✓ Back Light Compensation
- ✓ Defog Mode
- ✓ Motion Detection
- ✓ AI Function



Day/ Night Function

Support ONVIF 2.4

Wide Dynamic Range



- ✓ Digital Noise Reduction: 3DNR
- ✓ Video Compression: H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
- ✓ Audio Compression: G.711/G.722.1/G.726/MP2L2
- ✓ Support ONVIF 2.4 (Profile S/T/G)



RGM Digital


Section 1, Taiwan Boulevard, Central District, Taichung City, Taiwan
Tel. No.: 886-4-2561-2199
Homepage: www.rgm-digital.com
sales@rgm-digital.com



Plug and play

Internal POE

-  Power Supply
-  Plug and Play
-  Transmit Information

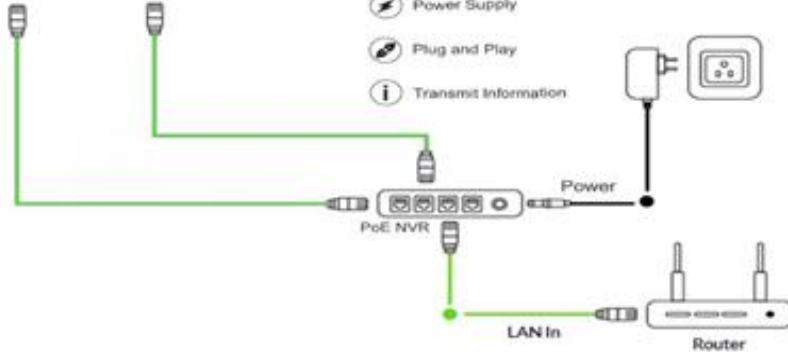

TECHNICAL SPECIFICATION

CAMERA	IPRGM1RL400
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
Resolution	4MP
Effective Pixels	2616 (H)*1964 (V)
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
Signal to Noise Ratio	≥52dB
TV System	PAL/NTSC
Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
Minimum Illumination	0.01Lux
Wide Dynamic Range	HDR: 120dB
Compression System	Progressive
Day/ Night	Color/ B&W (IR-CUT)
Audio Compression	G.711/G.722.1/G.726/MP2L2
Dual Streams	Yes
Main Video Stream	Main Stream(1,2,3): 2592*1944@30fps, 2560*1444@30fps, 1920*1080@30fps/ 1280*720@30fps
Sub Video Stream	Sub stream (1,2,3): 1280*720@30fps, 720*480@30fps, 352*288@30fps
Tri Stream	1280*720@30fps, 720*480@30fps, 352*288@30fps
Intelligent Analysis	Face Detection, Intrusion Detetion, Line Cross Detetion, Loiter Detetion, People Gather Detecion
Image Configuration	Saturation/Brightness/Contrast/Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
LENS	
Lens Type	C/ CS Mount
Pixels	4MP
NETWORK	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP ,PPPoE, NTP, UPnP, SMTP, UDP
ONVIF	Support ONVIF 2.4(Profile S/T/G)
POE	Internal, Support IEEE 802.3af
IE Brower	IE8-11, Google Chrome, Firefox , Mac Safari
GENERAL	
SD Card Slot	External, Support Max 512GB,Built in 4G Storage
RS485	Support
IR Cut Filter	YES
Operating Temperature	-20°C ~ +60°C RH95% Max
Power Supply	DC12V±10%,550mA, PoE (Power over Ethernet)
Dimension/ Weight	148 (W) x79 (H) x57 (D) mm, 585g
Weight	