



Window self-drilling screw countersunk head

RN RF02



GEOMETRY

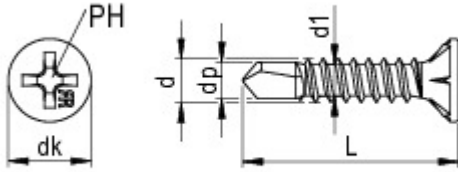

Material: Steel
Surface: RDR coated, 480 h

ASSORTMENT

d [mm]	L [mm]	Drive	d1 [mm]	dk [mm]	dp [mm]
3,9	13	PH 2	2,8	7,4	3,2
3,9	16	PH 2	2,8	7,4	3,2
3,9	19	PH 2	2,8	7,4	3,2
3,9	22	PH 2	2,8	7,4	3,2

PRODUCT INSTRUCTION


Length 13 mm: Drill tip length min. 4.0 mm. Lengths 16–22 mm: Drill tip length min. 4.5 mm. High corrosion protection thanks to RDR 480 h SSN DIN EN ISO 9227.

FIELD OF APPLICATION

Direct fitting of frame profiles up to 2.5 mm reinforcing thickness without pre-drilling.

Window production

Window self-drilling screw countersunk head RN RF02

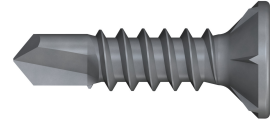

PROCESSING

Roller sorted for machining.