



Frame anchor

RN 195



GEOMETRY

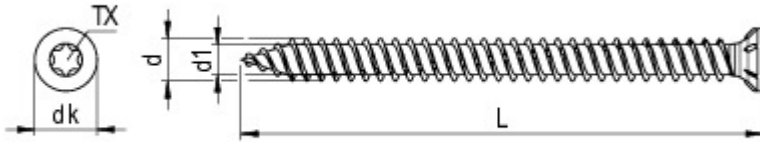

Material: Steel
Surface: zinc plated, blue passivated


ASSORTMENT

d [mm]	L [mm]	Drive	d1 [mm]	dk [mm]
7,5	52	TX 30	5,3	12,0
7,5	72	TX 30	5,3	12,0
7,5	92	TX 30	5,3	12,0
7,5	112	TX 30	5,3	12,0
7,5	132	TX 30	5,3	12,0
7,5	152	TX 30	5,3	12,0
7,5	182	TX 30	5,3	12,0
7,5	212	TX 30	5,3	12,0
7,5	252	TX 30	5,3	12,0
7,5	302	TX 30	5,3	12,0

TECHNOLOGY

d [mm]	7,5
Torsional moment [Nm]	20,0

Frame anchor RN 195



FIELD OF APPLICATION

Self-tapping screw for tension-free offset mounting.

Window and door mounting

PROCESSING

Pre-drilling to 6.5 mm for installation in concrete, sand-lime brick, solid brick, perforated brick, pumice, etc.
Installation in aerated concrete and softwood without pre-drilling.