

micro: bit


Building Steps

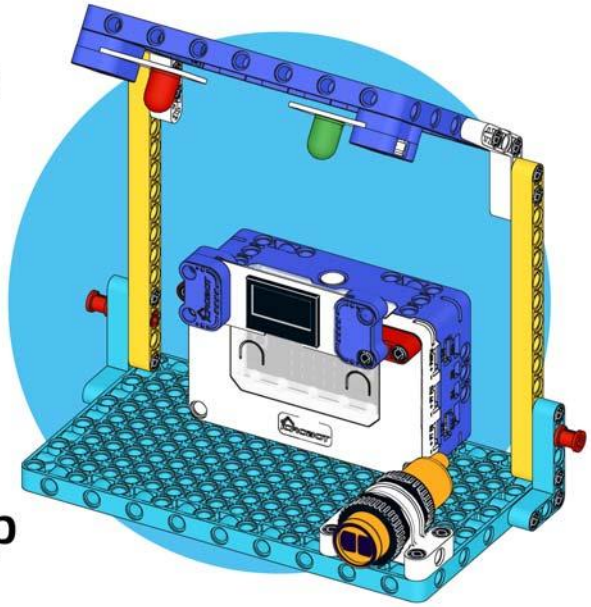


Smart Bus Stop




1

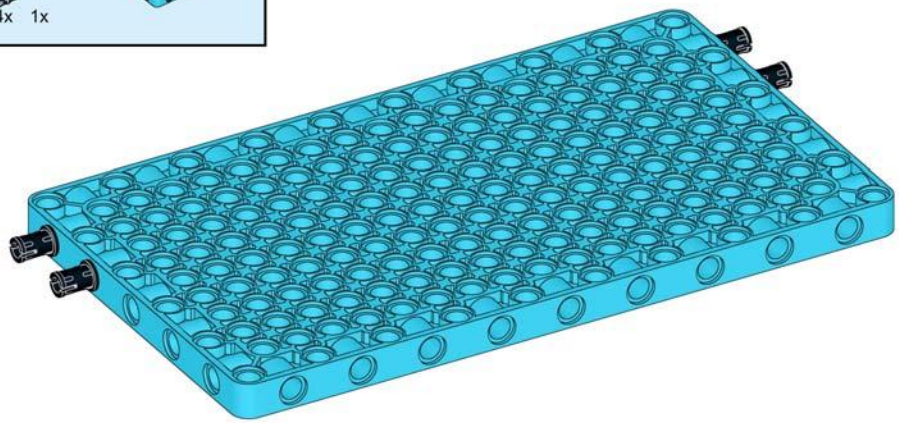


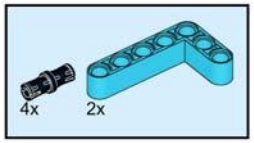


2




3

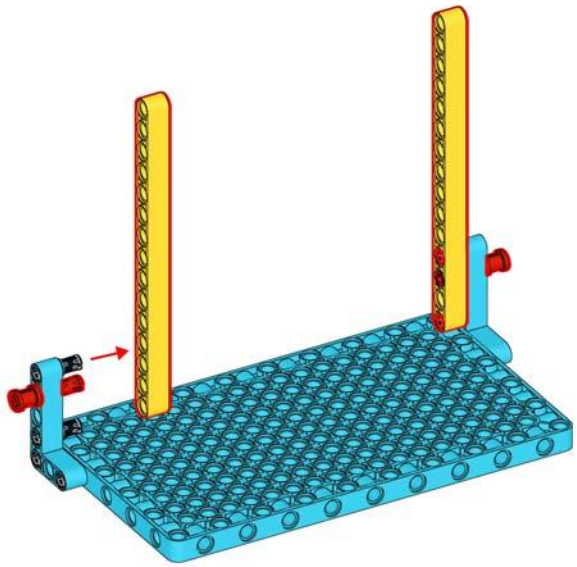

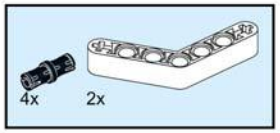



4

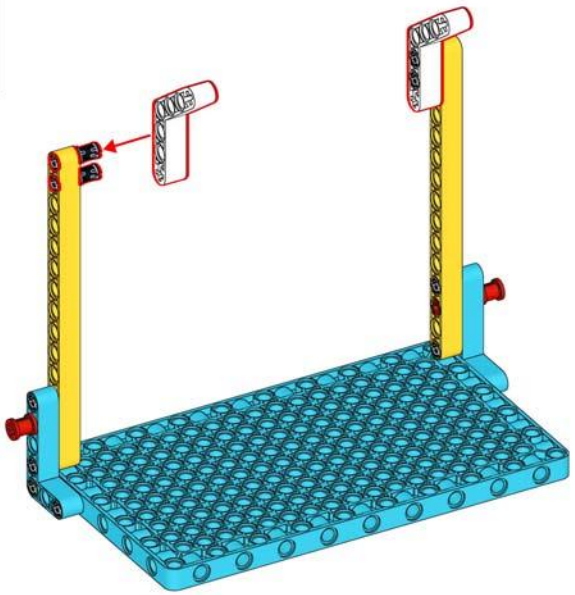




5

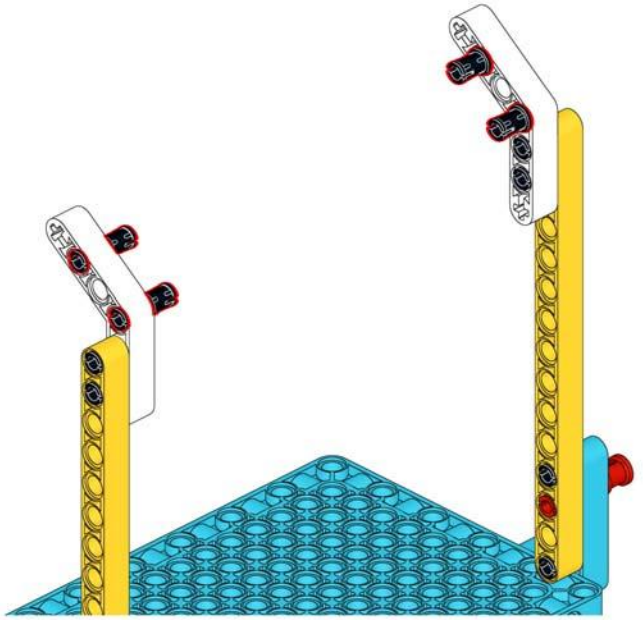







6




7

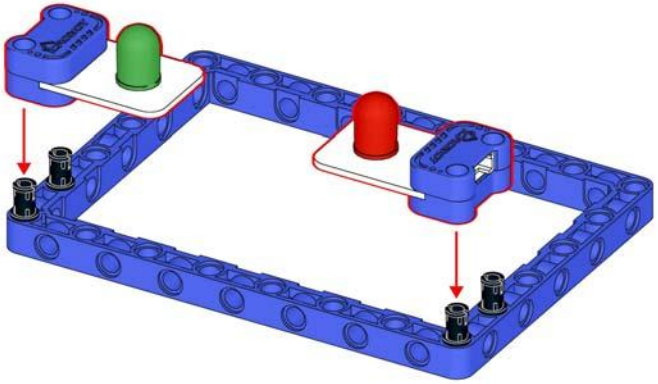


8

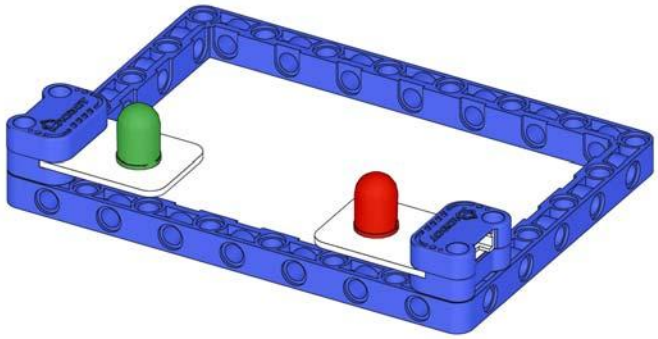


9

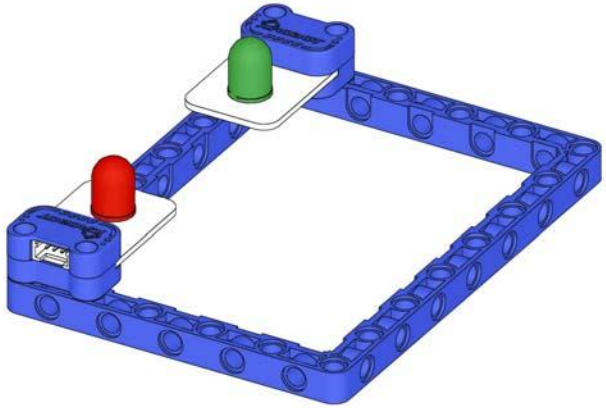

10

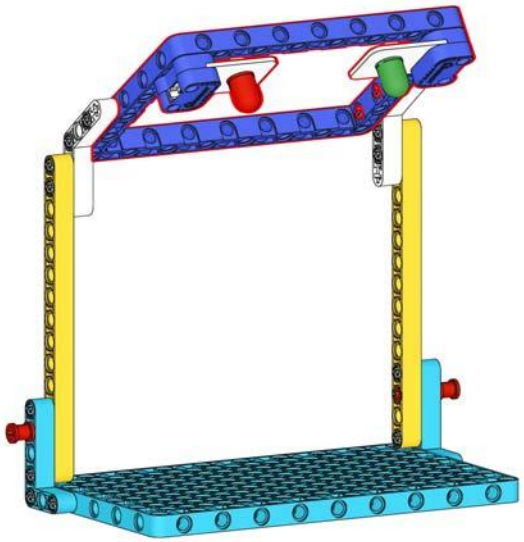

11

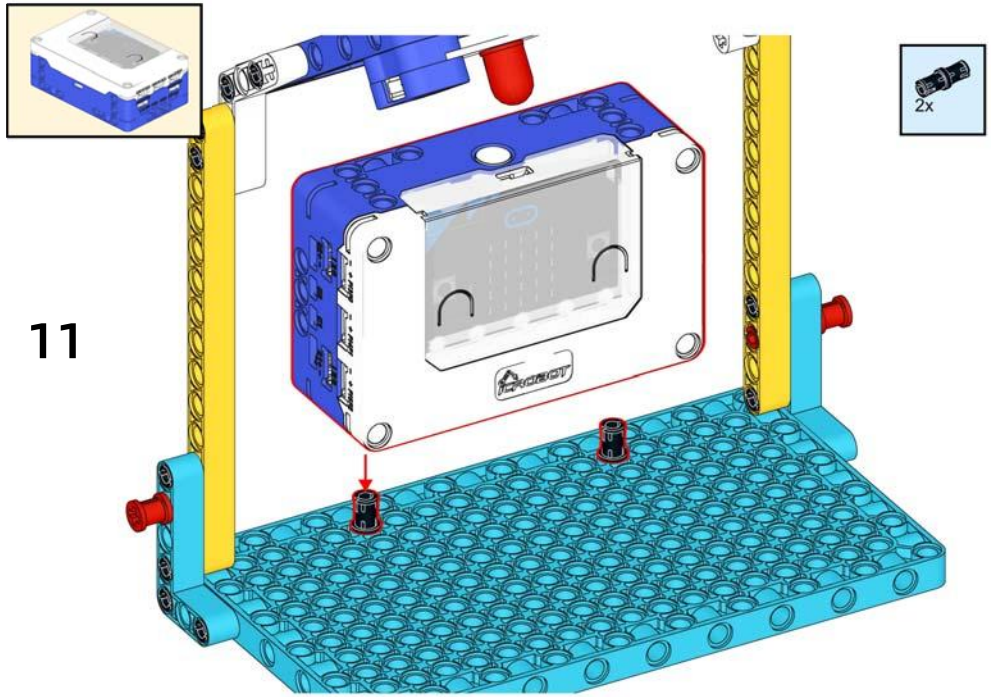


12




Please connect the data cable.


13

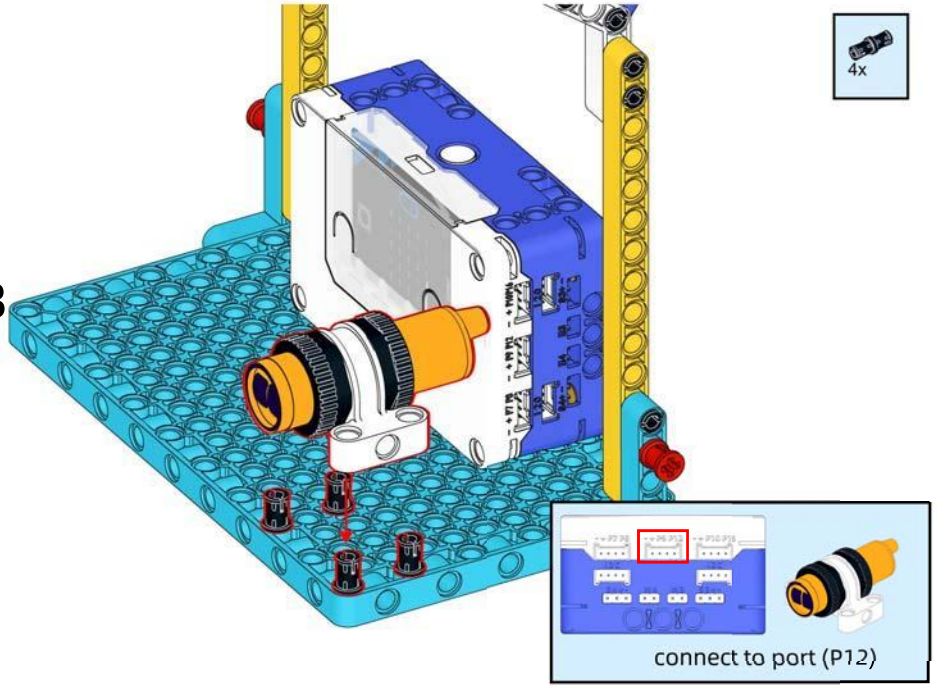

14

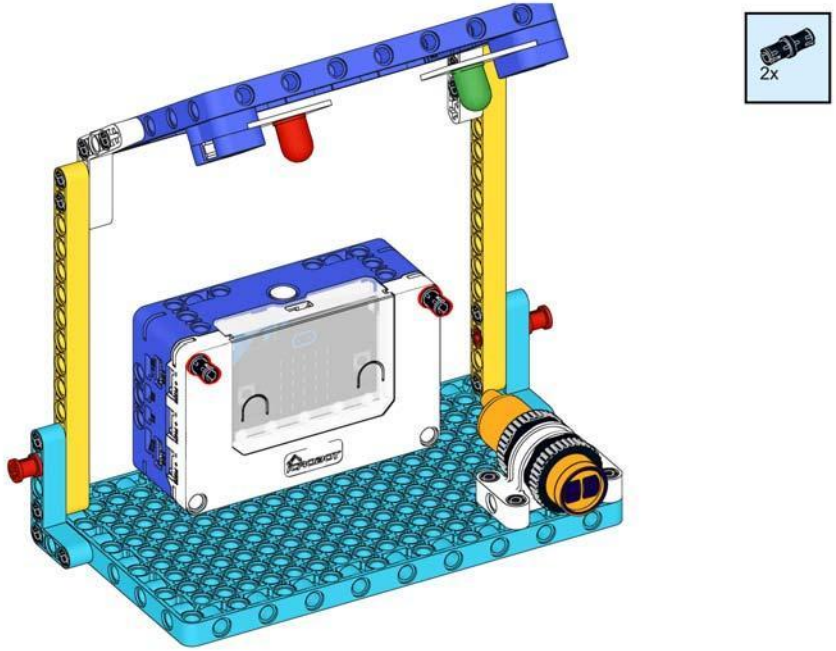


15

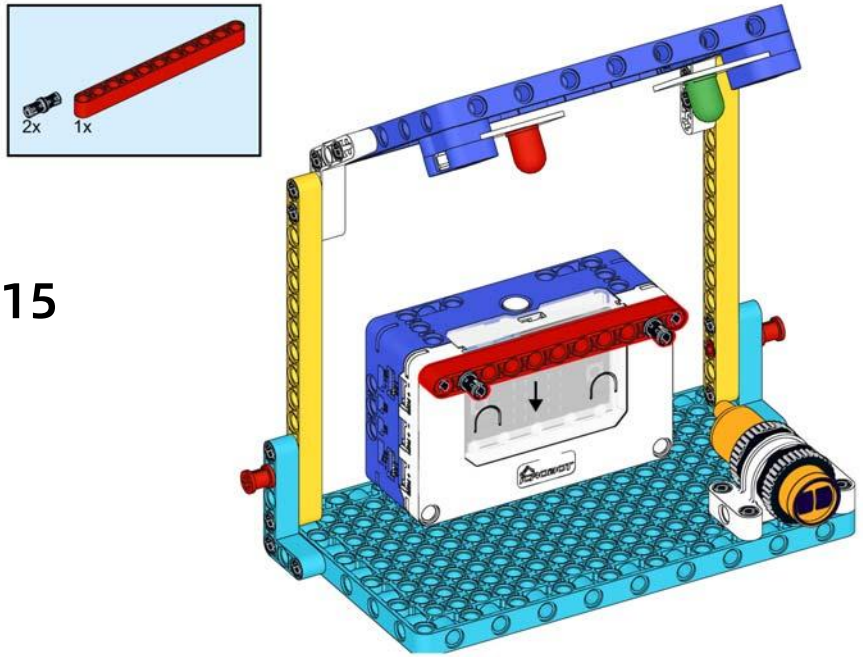


16




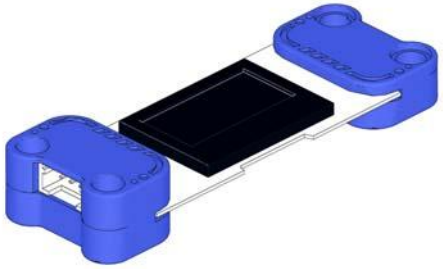

Please connect the data cable.


17

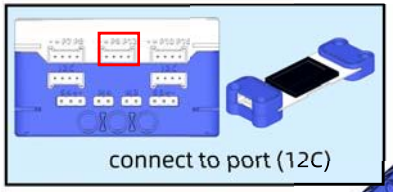

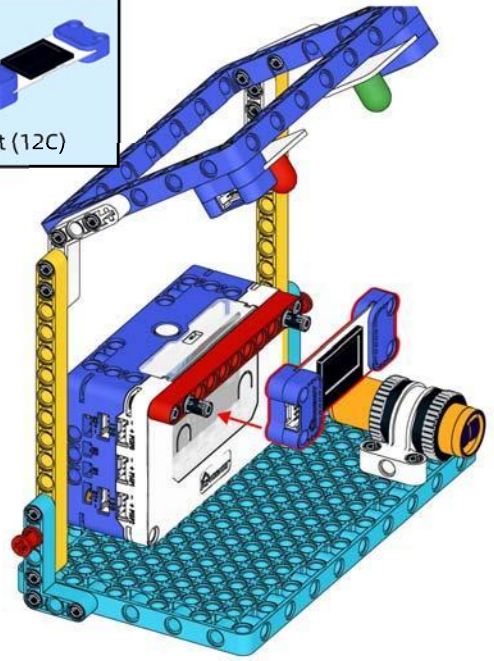



18

Press and hold the power button for 3s to power on.

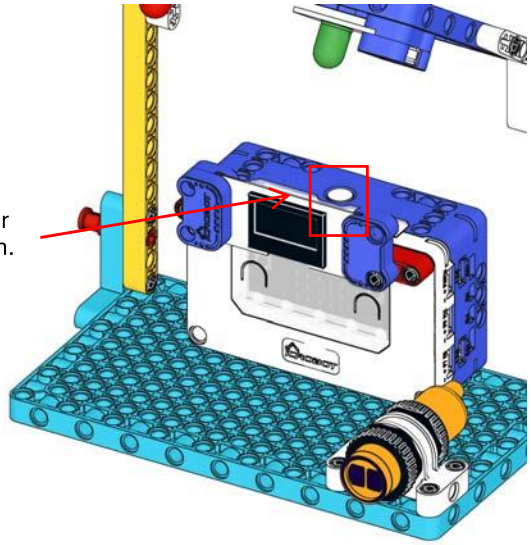

19

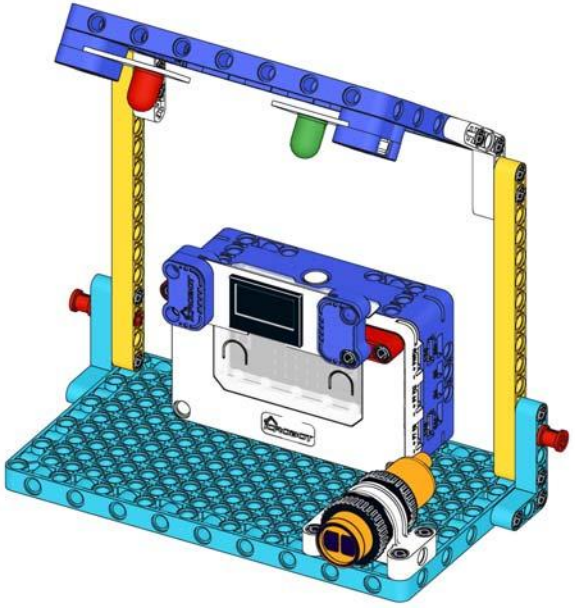

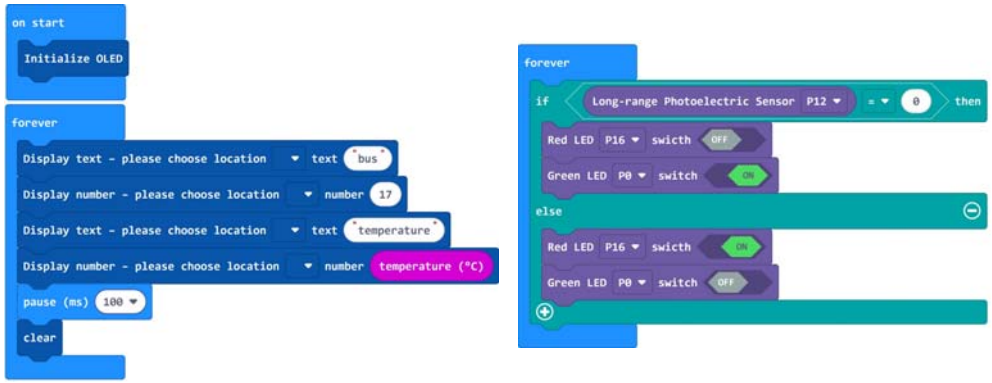
on start
Initialize OLED
forever
Display text - please choose location text bus
Display number - please choose location number 17
Display text - please choose location text temperature
Display number - please choose location number temperature (°C)
pause (ms) 100
clear
forever
if Long-range Photoelectric Sensor P12 = 0 then
Red LED P16 swicth OFF
Green LED P0 switch ON
else
Red LED P16 swicth ON
Green LED P0 switch OFF