



# EUROLUX

INDUSTRIAL ENGINEERING





## EZL948

▶▶ 无级变速



## EZL946

▶▶ 无级变速



### ● 主要技术参数 The main technical parameters

型号	Model	EZL-948	EZL-946
额定装载质量 (kg)	Rated Load volume kg	3000	3000
额定容量 (m³)	Rated bucket capacity m³	1.2	1.2
整机重量 (kg)	Weight of whole machine	8000	6700
发动机型号	Type of engine	东方红6015增压	4108增压/6015增压
额定功率 (kw)	Rated power kw	103	80/65-130
额定转速 (r/min)	Rated speed r/min	2400	2400
卸载高度 (mm)	Unloading distance mm	3600/4200/4500	3600/4200/4500
卸载距离 (mm)	Unloading distance mm	1650	1650
外型尺寸 (mm)	Size of shape(L×W×H)mm	7000×2220×3100	6930×2270×3080

#### 产品介绍

- 崛起力大，高位卸料自动放平，工作装置动作时间缩短，提高整机作业效率；
- 气顶油助力制动系统，钳盘式制动器；
- 分体式液力变矩器，不宜高温，维修方便；
- 前倾式前车架，卸载距离远，起重重量大；
- 可选配东方红 4108 增压，全柴天利 4108 增压，锡柴 4110；
- 电子熄火，自动断电，无刀闸。



## EZL940

▶▶ 加高臂粮食斗

## EZL938

▶▶ 无级变速

### 产品介绍

- 崛起力大，高位卸料自动放平，工作装置动作时间缩短，提高整机作业效率；
- 气顶油助力制动系统，钳盘式制动器；
- 分体式液力变矩器，不宜高温，维修方便；
- 前倾式前车架，卸载距离远，起重重量大；
- 可选配东方红 4108 增压，全柴天利 4108 增压，锡柴 4110；
- 电子熄火，自动断电，无刀闸。



### ● 主要技术参数 The main technical parameters

型号	Model	EZL-940	EZL-938
额定装载质量 (kg)	Rated Load volume kg	2000	2000
额定容量 (m³)	Rated bucket capacity m³	1.2	1.1
整机重量 (kg)	Weight of whole machine	6000	5000
发动机型号	Type of engine	4102增压	4102增压
额定功率 (kw)	Rated power kw	76	76
额定转速 (r/min)	Rated speed r/min	2400	2400
卸载高度 (mm)	Unloading distance mm	4200/4500/5000	3500
卸载距离 (mm)	Unloading distance mm	1800	1650
外型尺寸 (mm)	Size of shape(L×W×H)mm	6900×1950×2950	6025×1950×2850



## EZL936

▶▶ 无级变速



### ● 主要技术参数 The main technical parameters

型号	Model	EZL-936
额定装载质量 (kg)	Rated Load volume kg	2000
额定容量 (m³)	Rated bucket capacity m³	1.1
整机重量 (kg)	Weight of whole machine	5200
发动机型号	Type of engine	4100增压/4102增压
额定功率 (kw)	Rated power kw	65/76
额定转速 (r/min)	Rated speed r/min	2400
卸载高度 (mm)	Unloading distance mm	3500
卸载距离 (mm)	Unloading distance mm	1650
外型尺寸 (mm)	Size of shape(L×W×H)mm	6025×1950×2850

## EZL932

▶▶ 无级变速



### ● 主要技术参数 The main technical parameters

型号	Model	EZL-932
额定装载质量 (kg)	Rated Load volume kg	2000
额定容量 (m³)	Rated bucket capacity m³	1
整机重量 (kg)	Weight of whole machine	5400
发动机型号	Type of engine	4100增压/4102增压
额定功率 (kw)	Rated power kw	65/76
额定转速 (r/min)	Rated speed r/min	2400
卸载高度 (mm)	Unloading distance mm	3500
卸载距离 (mm)	Unloading distance mm	1650
外型尺寸 (mm)	Size of shape(L×W×H)mm	6325×1950×2850



# EZL928

矮棚装载机

# EZL930

矿井载机

### ● 主要技术参数 The main technical parameters

型号	Model	EZL-928
额定装载质量 (kg)	Rated Load volume kg	1600
额定容量 (m <sup>3</sup> )	Rated bucket capacity m <sup>3</sup>	0.7
整机重量 (kg)	Weight of whole machine	3400
发动机型号	Type of engine	490
额定功率 (kw)	Rated power kw	37-55
额定转速 (r/min)	Rated speed r/min	2400
卸载高度 (mm)	Unloading distance mm	3000/3200/3500
卸载距离 (mm)	Unloading distance mm	1000
外型尺寸 (mm)	Size of shape(L×W×H)mm	5500×1800×2180



安全标志编号: KCG210029




### ● 主要技术参数 The main technical parameters

型号	Model	EZL-930	EZL-928
额定装载质量 (kg)	Rated Load volume kg	2000	1500
额定容量 (m <sup>3</sup> )	Rated bucket capacity m <sup>3</sup>	0.8	0.7
整机重量 (kg)	Weight of whole machine	4500	4000
发动机型号	Type of engine	4105增压	4102增压
额定功率 (kw)	Rated power kw	85	76
额定转速 (r/min)	Rated speed r/min	2400	2400
卸载高度 (mm)	Unloading distance mm	2200	1800
卸载距离 (mm)	Unloading distance mm	800	850
外型尺寸 (mm)	Size of shape(L×W×H)mm	5600*1900*1900	5400*1650*1800



# EZL920/918

▶▶ 无级变速

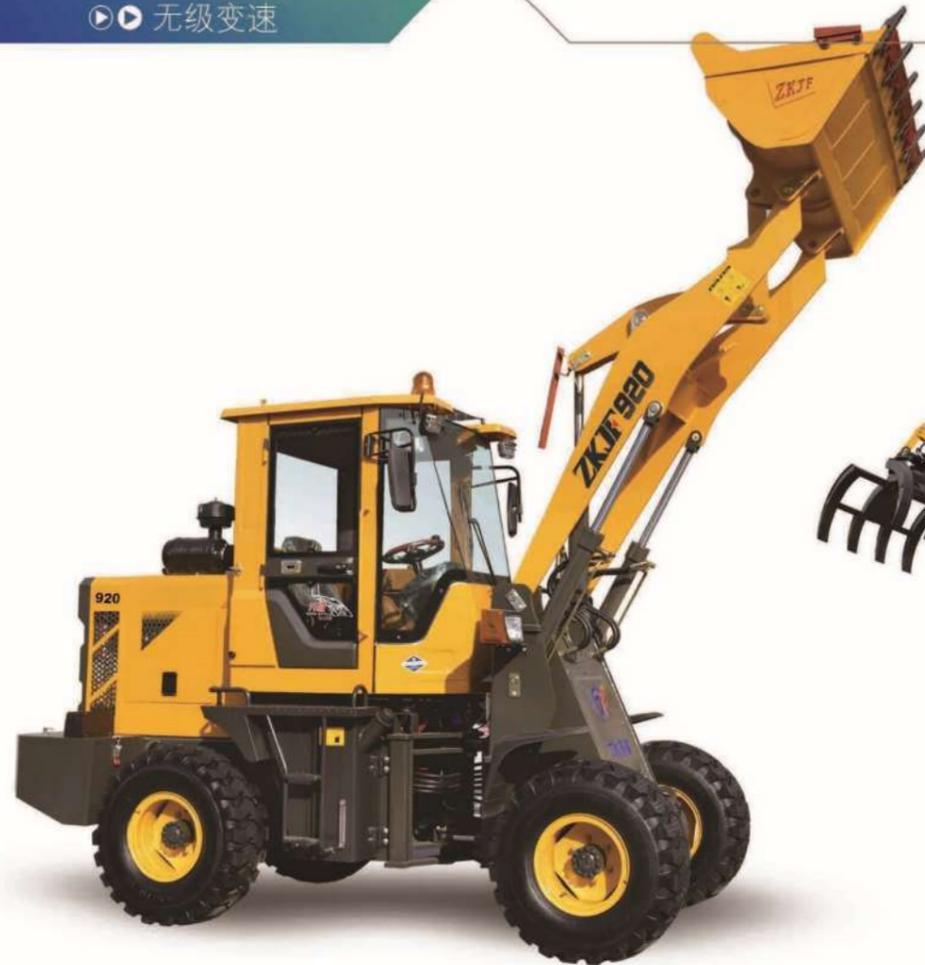

## EZL932

ZHONGKEJUFENG MACHINERY

▶▶ 360° 旋转无死角叉子



### 装载机可选作业配置 OPTIONAL CONFIGURATION LOADER OPERATIONS



#### ● 主要技术参数 The main technical parameters

型号	Model	EZL-920	EZL-918
额定装载质量 (kg)	Rated Load volume kg	1500	1500
额定容量 (m³)	Rated bucket capacity m³	0.7	0.7
整机重量 (kg)	Weight of whole machine	3000	3000
发动机型号	Type of engine	490	490
额定功率 (kw)	Rated power kw	38	38
额定转速 (r/min)	Rated speed r/min	2400	2400
卸载高度 (mm)	Unloading distance mm	3200/3500	3200/3500
卸载距离 (mm)	Unloading distance mm	1050	1050
外型尺寸 (mm)	Size of shape(L×W×H)mm	5100×1800×2750	5100×1800×2750

一机多用，  
高卸载，大掘起力，卸料后，铲斗自动放平，有效提高作业效率  
整机动力强劲、牵引力大、性价比卓越  
本公司可根据用户需求及不同工况需要，  
定做各种异型装载机叉头等多种工作装置



# ECPC60

越野叉车

# ECPC50

越野叉车



### 主要技术参数 The main technical parameters

型号	ECPC-60	
外形尺寸 (mm)	Overall dimension	4720*2200*2800
整车质量 (kg)	Vehicle mass	7500
发动机型号	Engine model	玉柴4105增压国III(可选配)
额定功率 (kw)	Rated power	110
轮胎型号	Tire type	12R22.5
最小转弯半径 (mm)	Minimum turning radius	4050
轴距 (mm)	Wheelbase	2400
最高车速 (km/h)	Maximum speed	40
门架卸载高度 (m)	Gantry unloading height	4-6

### 主要技术参数 The main technical parameters

型号	ECPC-50	
外形尺寸 (mm)	Overall dimension	4550*2035*2800
整车质量 (kg)	Vehicle mass	6500
发动机型号	Engine model	一汽锡柴国IV4102增压
额定功率 (kw)	Rated power	96
轮胎型号	Tire type	16/70-24
最小转弯半径 (mm)	Minimum turning radius	4000
轴距 (mm)	Wheelbase	2350
最高车速 (km/h)	Maximum speed	40
门架卸载高度 (m)	Gantry unloading height	4-6



## ECPC40

▶▶ 越野叉车



## ECPC35C

▶▶ 地下室越野叉车



### ● 主要技术参数 The main technical parameters

型号	ECPC-40	
外形尺寸 (mm)	Overall dimension	4300*2000*2650
整车质量 (kg)	Vehicle mass	5500
发动机型号	Engine model	一汽锡柴4102自吸共轨 国III/国IV(可选配)
额定功率 (kw)	Rated power	60/36.8
轮胎型号	Tire type	16/70-20
最小转弯半径 (mm)	Minimum turning radius	3900
轴距 (mm)	Wheelbase	2320
最高车速 (km/h)	Maximum speed	35
门架卸载高度 (m)	Gantry unloading height	4-6

### ● 主要技术参数 The main technical parameters

型号	ECPC35C	
外形尺寸 (mm)	Overall dimension	3800*1850*2600
整车质量 (kg)	Vehicle mass	4500
发动机型号	Engine model	全柴493/一汽解放锡柴490 国IV
额定功率 (kw)	Rated power	36.8
轮胎型号	Tire type	20.5/70-16
最小转弯半径 (mm)	Minimum turning radius	3200
轴距 (mm)	Wheelbase	2200
最高车速 (km/h)	Maximum speed	30
门架卸载高度 (m)	Gantry unloading height	3-6



# ECPC35A

越野叉车

# ECPC35B

越野叉车



### 主要技术参数 The main technical parameters

型号	ECPC35A	
外形尺寸 (mm)	Overall dimension	3800*1850*2450
整车质量 (kg)	Vehicle mass	4500
发动机型号	Engine model	全柴493/一汽解放锡柴490 国IV
额定功率 (kw)	Rated power	36.8
轮胎型号	Tire type	20.5/70-16
最小转弯半径 (mm)	Minimum turning radius	3200
轴距 (mm)	Wheelbase	2200
最高车速 (km/h)	Maximum speed	30
门架卸载高度 (m)	Gantry unloading height	3-6

### 主要技术参数 The main technical parameters

型号	ECPC35B	
外形尺寸 (mm)	Overall dimension	3800*1850*2600
整车质量 (kg)	Vehicle mass	4500
发动机型号	Engine model	全柴493/一汽解放锡柴490 国IV
额定功率 (kw)	Rated power	36.8
轮胎型号	Tire type	20.5/70-16
最小转弯半径 (mm)	Minimum turning radius	3200
轴距 (mm)	Wheelbase	2200
最高车速 (km/h)	Maximum speed	30
门架卸载高度 (m)	Gantry unloading height	3-6



# ECPC35

▶▶ 后转向款

- 造型美观、结构紧凑、转弯半径小、操纵轻便灵活，可在狭小空间内作业，
- 全液压力转向，方向盘和座椅可调节角度和前后相对位置，
- 最大限度满足驾驶人员个性化要求；
- 各种操纵手柄的设置按照人机工程学的要求，
- 优化设计以减轻劳动强度，提高生产效率；
- 宽视野门架，驾驶员具有广阔的视角，
- 适合在野外、户外进行货物装卸，堆垛和短途运输作业。



## ●主要技术参数 The main technical parameters

型号	ECPC35	
外形尺寸 (mm)	Overall dimension	3650*1810*2420
整车质量 (kg)	Vehicle mass	4800
发动机型号	Engine model	全柴493/一汽解放锡柴490 国IV
额定功率 (kw)	Rated power	36.8
轮胎型号	Tire type	朝阳20.5
最小转弯半径 (mm)	Minimum turning radius	2900
轴距 (mm)	Wheelbase	2160
最高车速 (km/h)	Maximum speed	30
门架卸载高度 (m)	Gantry unloading height	3-6

# ECPC35

▶▶ 中置铰接

- 能叉能抱能举升，
- 能抓能吊能倾翻，
- 工地施工多样化，更换属具简单方便！
- 大大节省多工程车施工，
- 一机多样化一年租车费用换购一台四驱越野叉车！
- 地下室或有限高场所使用
- 各方向视线好
- 灵活度高



## ●主要技术参数 The main technical parameters

型号	ECPC35	
外形尺寸 (mm)	Overall dimension	3650*1850*2180
整车质量 (kg)	Vehicle mass	4500
发动机型号	Engine model	全柴493/一汽解放锡柴490 国IV
额定功率 (kw)	Rated power	36.8
轮胎型号	Tire type	20.5/70-16
最小转弯半径 (mm)	Minimum turning radius	3200
轴距 (mm)	Wheelbase	2200
最高车速 (km/h)	Maximum speed	30
门架卸载高度 (m)	Gantry unloading height	3-6



**一机多用**

越野叉车



**属具齐全**

越野叉车





# E6.5 方/( 290°)

▶▶ 自上料搅拌机



- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机上车!

- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!

### 整车参数 Vehicle Parameters

外形尺寸 (L×W×H) : Overall Dimensions (L × W × H)	8450×3050×4830
轴距: Wheelbase (mm)	2850mm
整备质量: Curb Weight (kg)	12520kg
驱动形式: Drive Form	变矩器 Torque converter
最高车速: Maximum Speed (km / h)	40km/h
最大爬坡度: Maximum Gradeability	45°
最小转弯半径: Minimum Turning Radius (mm)	4800mm
最小离地间隙: Minimum Ground Clearance (mm)	350mm

### 维护加注量 Service Refill Capacities

燃油箱: 370升 Fuel Tank: 370 liters
液压油系统总容量: 278升 Total Hydraulic System Capacity: 278 liters
机油: 22升 Oil: 22 liters

### 发动机 Diesel Engine

型号: 潍柴道依茨6105增压 Model: WEICHAI DEUTZ 6105 Turbo-charged
额定功率: 92-132kw Rated Power: 92-132kw

### 液压系统参数 Parameters of Hydraulic System

减速机: KY07-5-J Reducer: KY07-5-J
泵: 力士乐 Pump: Rexroth
马达: 美国桑尼63马达 Hydraulic Motor: Sunny, USA 63

### 变速箱 Gearbox

型号: ZL-428动力换挡变速箱 Model: ZL-428 Power Shift Gearbox
档位: 4前进 4后退 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号: EJBC-65 Equipment model: EJBC-65
---

### 供水系统参数 Water Supply System Parameters

水箱容积: 1465L Tank Volume: 1465L
供水方式: 时间继电器 Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....9000L 滚筒旋转速度: .....16.5转/分钟 混凝土产量: .....6.5立方米/罐

“重型”球形鞍座上安装的反力架可以290°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的柱塞液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 9000L Drum Rotation Speed: .....16.5 rpm Concrete yield: ..... 6.5m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

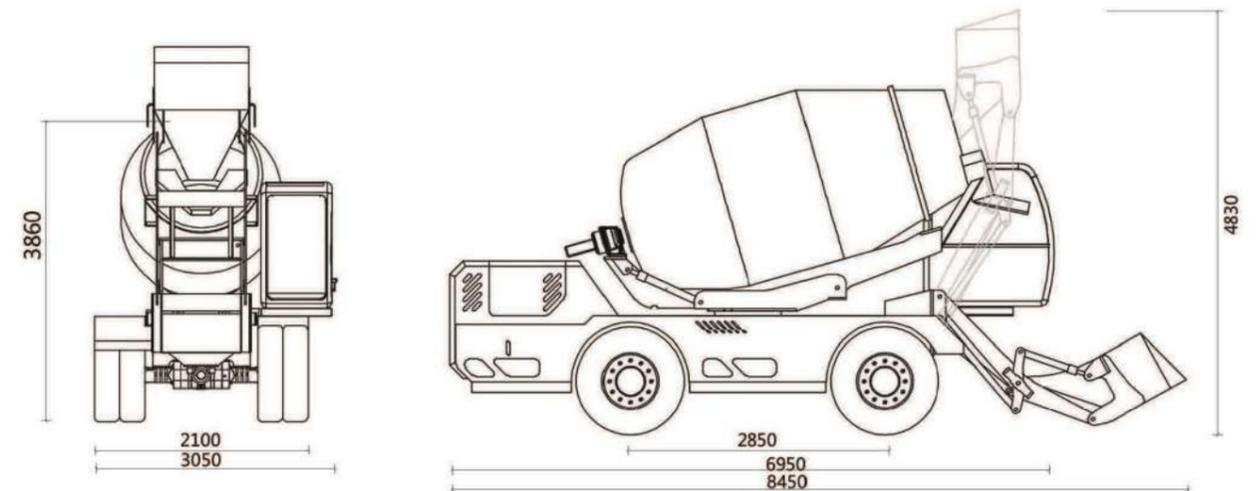



# E5.5方/(270°)

▶▶自上料搅拌机

罐体驾驶室同步旋转



- 主要液压部件全部进口！
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度！
- 不用混凝土运输车！
- 不用装载机上料！
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



### 整车参数 Vehicle Parameters

外形尺寸(L×W×H) Overall Dimensions(L×W×H)	8450×3100×4580
轴距(mm) Wheelbase(mm)	3350
整备质量(kg) Curb Weight(kg)	11200
驱动形式 Drive Form	变矩器 Torque converter
最高车速(km/h) Maximum Speed(km/h)	42
最大爬坡度(°) Maximum Gradeability	45°
最小转弯半径(mm) Minimum Turning Radius(mm)	6200
最小离地间隙(mm) Minimum Ground Clearance(mm)	380

### 发动机 Diesel Engine

型号: 玉柴6105增压  
额定功率: 92-132kw  
Model: YUCHAI 6105 Turbo-charged  
Rated Power: 92-132kw

### 变速箱 Gearbox

型号: ZL-428动力换挡变速箱  
档位: 4前进 4后退  
Model: ZL-428 Power Shift Gearbox  
Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号: EJBC-55  
Equipment Model: EJBC-55

### 维护加注量 Service Refill Capacities

燃油箱: 160升  
液压系统总容量: 160升  
机油: 20升  
Fuel Tank: 160 liters  
Total Hydraulic System Capacity: 160 liters  
Oil: 20 liters

### 液压系统参数 Parameters of Hydraulic System

减速机: HJ80-43  
泵: 力士乐90泵  
马达: 美国桑尼56马达  
Reducer: HJ80-43  
Pump: Rexroth 90  
Motor: USA SUNNY 56

### 供水系统参数 Water Supply System Parameters

水箱容积: 850L  
供水方式: 时间继电器  
Tank Volume: 850L  
Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....7800L 滚筒旋转速度: .....20转/分钟 混凝土产量: .....5.5立方米/罐

“重型”球型鞍座上安装的反力架可以180°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: .....7800L Drum Rotation Speed: .....20 rpm Concrete yield: .....5.5m<sup>3</sup>/Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

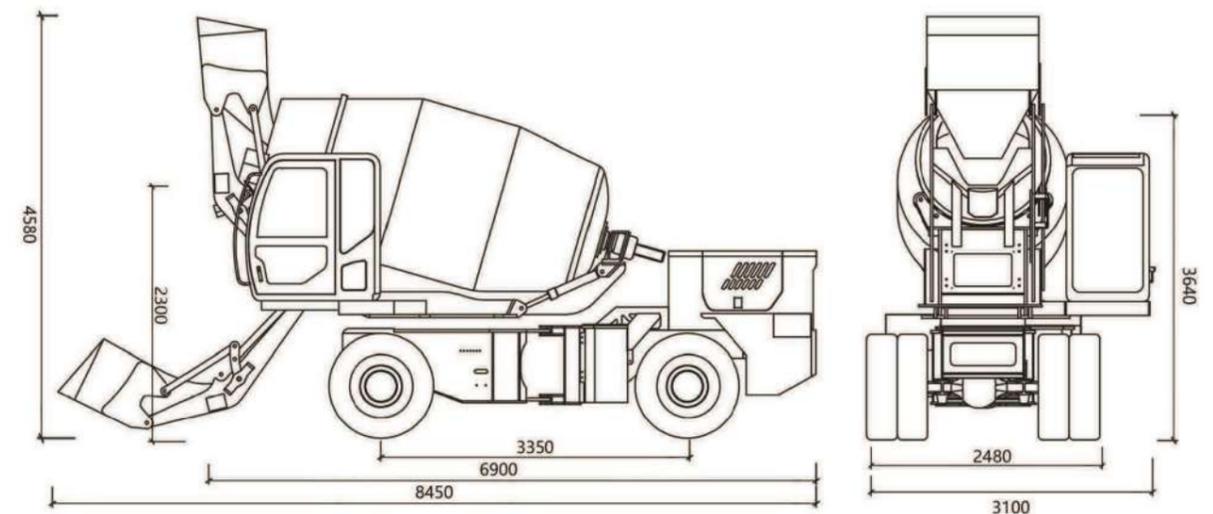



E4方/(290°)

自料搅拌车



- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机上料!

- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!

### 整车参数 Vehicle Parameters

外形尺寸(L×W×H): 7640×2870×4750  
 Overall Dimensions(L×W×H)  
 轴距: 2480  
 Wheelbase(mm)  
 整备质量: 9000kg  
 Curb Weight(kg)  
 驱动形式: 变矩器 Torque converter  
 Drive Form  
 最高车速: 35km/h  
 Maximum Speed(km/h)  
 最大爬坡度: 45°  
 Maximum Gradeability  
 最小转弯半径: 4800mm  
 Minimum Turning Radius(mm)  
 最小离地间隙: 330mm  
 Minimum Ground Clearance(mm)

### 维护加注量 Service Refill Capacities

燃油箱: 230升  
 液压系统总容量: 170升  
 机油: 16升  
 Fuel Tank: 230 liters  
 Total Hydraulic System Capacity: 170 liters  
 Oil: 16 liters

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。

滚筒几何容量: .....6000L 滚筒旋转速度: .....18-21转/分钟 混凝土产量: .....4.0立方米/罐

“重型”球形鞍座上安装的反力架可以290°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的柱塞液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: .....6000L Drum Rotation Speed: .....18-21rpm Concrete yield: .....4.0m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

### 发动机 Diesel Engine

型号:玉柴 4108增压  
 额定功率:91kw  
 Model: Yuchai 4108 Turbo-charged  
 Rated Power: 91kw

### 液压系统参数 Parameters of Hydraulic System

减速机: KY07-5-J  
 泵: 40-63  
 马达: 海特克  
 REDUCER: KY07-5-J  
 PUMP: 40-63  
 MOTOR: HYTEK

### 变速箱 Gearbox



型号:ZL-315动力换挡变速箱  
 档位:4前进 4后退  
 Model: ZL-315 Power Shift Gearbox  
 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-40A  
 Equipment model: EJBC-40A

### 供水系统参数 Water Supply System Parameters

水箱容积: 780L  
 供水方式: 时间继电器  
 Tank Volume: 780L  
 Water Supply: Time Relay

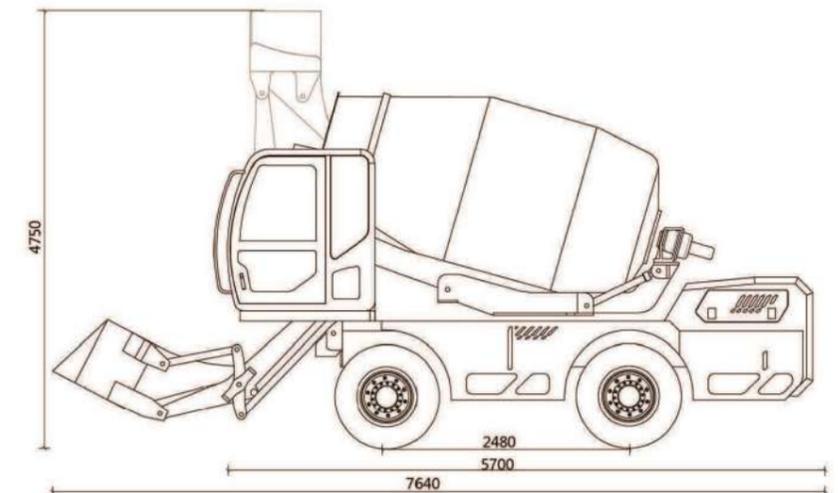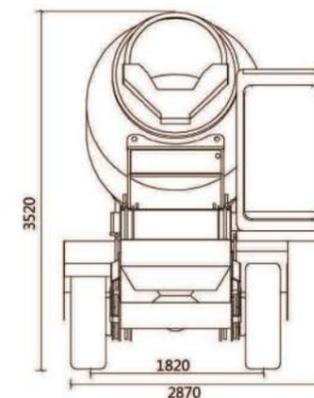



# E4方/(270°)

▶▶自上料搅拌机

罐体驾驶室同步旋转



- 主要液压部件全部进口！
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度！
- 不用混凝土运输车！
- 不用装载机上料！

- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



### 整车参数 Vehicle Parameters

外形尺寸 (L×W×H)	8450×3000×4500
Overall Dimensions (L × W × H)	8450 × 3000 × 4500
轴距(mm)	3300
Wheelbase (mm)	3300
整备质量(kg)	9700
Curb Weight (kg)	9700
驱动形式	变矩器 Torque converter
Drive Form	Torque converter
最高车速(km/h)	35
Maximum Speed (km / h)	35
最大爬坡度(°)	40°
Maximum Gradeability	40°
最小转弯半径(mm)	5300
Minimum Turning Radius (mm)	5300
最小离地间隙(mm)	380
Minimum Ground Clearance (mm)	380

### 发动机 Diesel Engine

型号: 玉柴4108增压  
 额定功率: 91kw  
 Model: YUCHAI 4108 Turbo-charged  
 Rated Power: 91kw

### 变速箱 Gearbox

型号: ZL-315动力换挡变速箱  
 档位: 4前进 4后退  
 Model: ZL-315 Power Shift Gearbox  
 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-40C  
 Equipment Model:EJBC-40C

### 维护加注量 Service Refill Capacities

燃油箱: 120升  
 液压系统总容量: 120升  
 机油: 16升  
 Fuel Tank: 120 liters  
 Total Hydraulic System Capacity: 120 liters  
 Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43  
 泵:力士乐90  
 马达:海特克  
 Reducer:HJ80-43  
 Pump:Rexroth90  
 Motor:HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积:750L  
 供水方式:时间继电器  
 Tank Volume: 750L  
 Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....6000L 滚筒旋转速度: .....20转/分钟 混凝土产量: .....4立方米/罐

“重型”球星鞍座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 6000L Drum Rotation Speed: .....20 rpm Concrete yield: .....4m<sup>3</sup> / Batch


The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

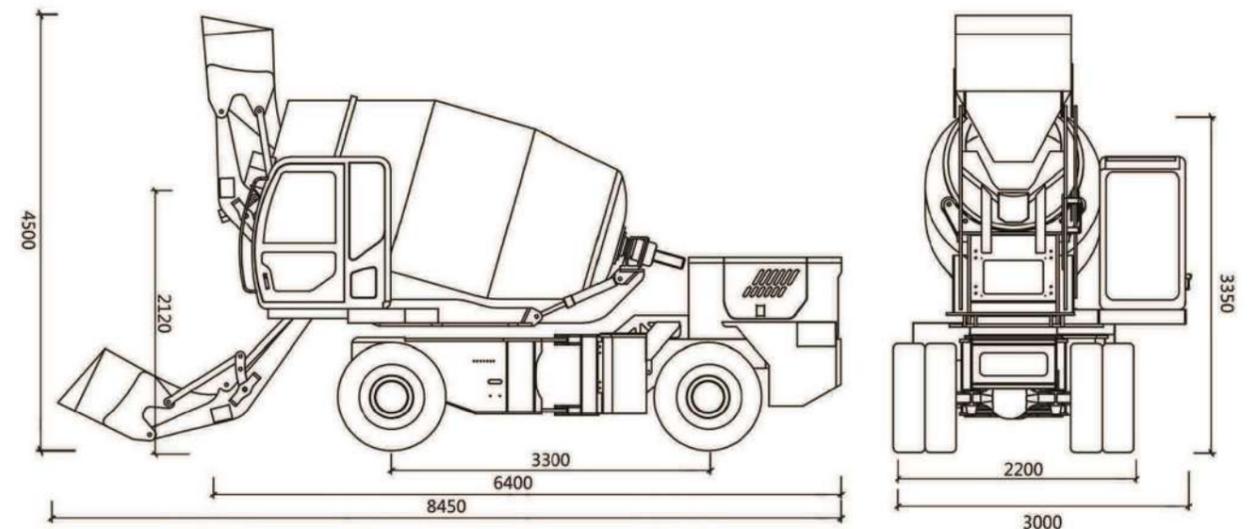



# E3.5方A款/(270°)

自料搅拌车

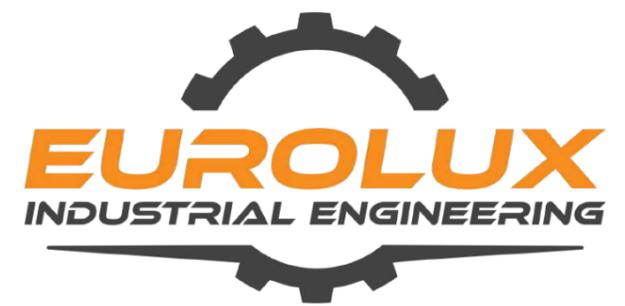

- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机送料!
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!

### 整车参数 Vehicle Parameters

外形尺寸(L×W×H)	7830×2680×4170
Overall Dimensions(L×W×H)	7830×2680×4170
轴距(mm)	2900
Wheelbase(mm)	2900
整备质量(kg)	7800
Curb Weight(kg)	7800
驱动形式	变矩器 Torque converter
Drive Form	Torque converter
最高车速(km/h)	30
Maximum Speed(km/h)	30
最大爬坡度(°)	30°
Maximum Gradeability	30°
最小转弯半径(mm)	5300
Minimum Turning Radius(mm)	5300
最小离地间隙(mm)	380
Minimum Ground Clearance(mm)	380

### 发动机 Diesel Engine

型号: 玉柴 4105增压  
 额定功率: 85 kW  
 Model: YUCHAI 4105, Turbo-charged  
 Rated Power: 85 kW

### 变速箱 Gearbox

型号: ZL-280动力换挡变速箱  
 档位: 4前进 4后退  
 Model: ZL-280 Power Shift Gearbox  
 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-35A  
 Equipment Model:EJBC-35A

### 维护加注量 Service Refill Capacities

燃油箱: 120升  
 液压系统总容量: 120升  
 机油: 16升  
 Fuel Tank: 120 liters  
 Total Hydraulic System Capacity: 120 liters  
 Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43  
 双联泵:CBGQ 2040/2080  
 马达:海特克  
 Reducer: HJ80-43  
 Dual Gear Pump: CBGQ 2040/2080  
 Motor: HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积:620L  
 供水方式:时间继电器  
 Tank Volume: 620L  
 Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....4740L 滚筒旋转速度: .....18-21转/分钟 混凝土产量: .....3.5立方米/罐

“重型”球星鞍座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 4740L Drum Rotation Speed: .....18-21 rpm Concrete yield: ..... 3.5m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

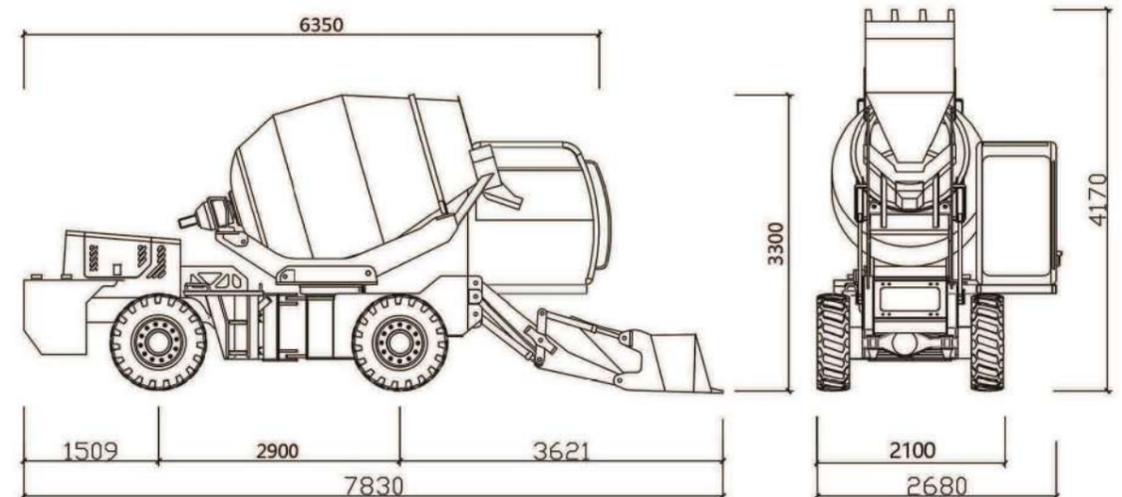



# E3.5方B款/(270°)

▶▶ 自上料搅拌机



- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机上料!
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



### 整车参数 Vehicle Parameters

外形尺寸(L×W×H) Overall Dimensions(L×W×H)	7730×2700×4180
轴距(mm) Wheelbase (mm)	2650
整备质量(kg) Curb Weight (kg)	7900
驱动形式 Drive Form	变矩器 Torque converter
最高车速(km/h) Maximum Speed (km / h)	30
最大爬坡度(°) Maximum Gradeability	30°
最小转弯半径(mm) Minimum Turning Radius (mm)	5300
最小离地间隙(mm) Minimum Ground Clearance (mm)	380

### 发动机 Diesel Engine

型号: 玉柴 4105增压  
额定功率: 85kw  
Model: Yuchai 4105 Turbo-charged  
Rated Power: 85kw

### 变速箱 Gearbox

型号: ZL-280动力换挡变速箱  
档位: 4前进 4后退  
Model: ZL-280 Power Shift Gearbox  
Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号: EJBC-35B  
Equipment Model: EJBC-35B

### 维护加注量 Service Refill Capacities

燃油箱: 120升  
液压系统总容量: 120升  
机油: 16升  
Fuel Tank: 120 liters  
Total Hydraulic System Capacity: 120 liters  
Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机: HJ80-43  
泵: CBGQ 2040/2080  
马达: 海特克  
Reducer: HJ80-43  
Dual Gear Pump: CBGQ 2040/2080  
Hydraulic Motor: HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积: 620L  
供水方式: 时间继电器  
Tank Volume: 620L  
Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....4740L 滚筒旋转速度: .....18-21转/分钟 混凝土产量: .....3.5立方米/罐

“重型”球星鞍座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 4740L Drum Rotation Speed: .....18-21 rpm Concrete yield: ..... 3.5m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

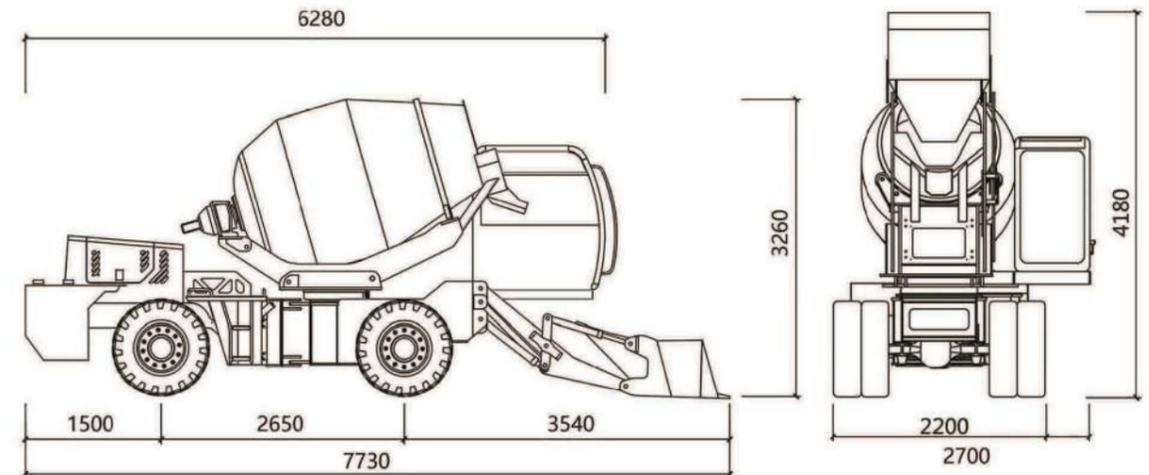



# E3.5 方C款/(270°)

▶▶ 自上料搅拌机

罐体驾驶室同步旋转



### 整车参数 Vehicle Parameters

外形尺寸 (L×W×H) Overall Dimensions (L × W × H)	7600×2800×4180
轴距(mm) Wheelbase (mm)	2640
整备质量(kg) Curb Weight (kg)	8300
驱动形式 Drive Form	变矩器 Torque converter
最高车速(km/h) Maximum Speed (km / h)	30
最大爬坡度(°) Maximum Gradeability	30°
最小转弯半径(mm) Minimum Turning Radius (mm)	5300
最小离地间隙(mm) Minimum Ground Clearance (mm)	380

### 发动机 Diesel Engine

型号: 玉柴 4105增压  
额定功率: 85kw  
Model: Yuchai 4105 Turbo-charged  
Rated Power: 85kw

### 变速箱 Gearbox

型号: ZL-280动力换挡变速箱  
档位: 4前进 4后退  
Model: ZL-280 Power Shift Gearbox  
Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-35C  
Equipment Model:EJBC-35C

### 维护加注量 Service Refill Capacities

燃油箱: 120升  
液压系统总容量: 120升  
机油: 16升  
Fuel Tank: 120 liters  
Total Hydraulic System Capacity: 120 liters  
Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43  
泵:CBG9 2050/2032  
马达:海特克  
Reducer: HJ80-43  
Dual Gear Pump: CBG9 2050/2032  
Hydraulic Motor: HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积:920L  
供水方式:时间继电器  
Tank Volume: 920L  
Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....4740L 滚筒旋转速度: .....18-21转/分钟 混凝土产量: .....3.5立方米/罐

“重型”球星鞍座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 4740L Drum Rotation Speed: .....18-21 rpm Concrete yield: ..... 3.5m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

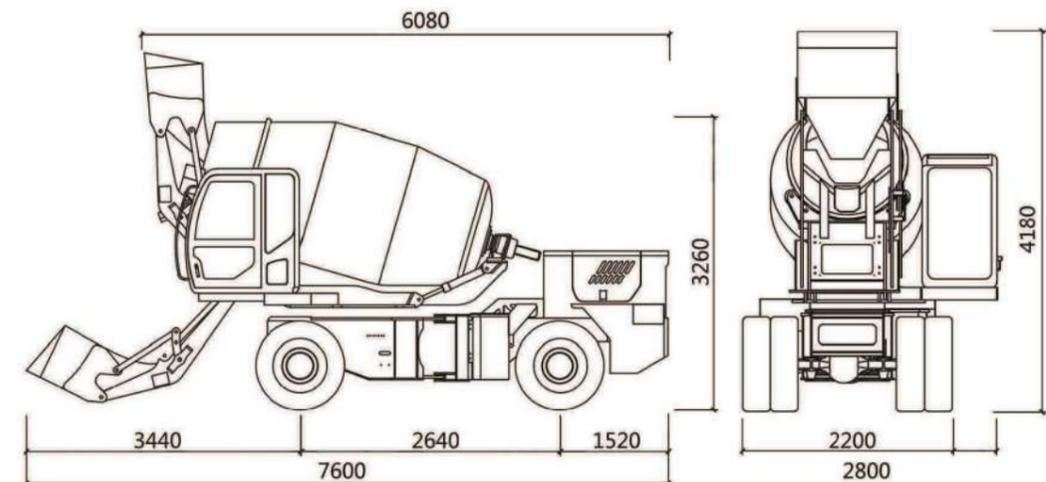

- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机上料!
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



# E3.5 方D款/(180°)

▶▶ 自上料搅拌车

驾驶室双向驾驶



- 主要液压部件全部进口！
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度！
- 不用混凝土运输车！
- 不用装载机上料！
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



### 整车参数 Vehicle Parameters

外形尺寸 (L×W×H) Overall Dimensions (L × W × H)	7590×2600×4270
轴距(mm) Wheelbase (mm)	2687
整备质量(kg) Curb Weight (kg)	8050
驱动形式 Drive Form	变矩器 Torque converter
最高车速(km/h) Maximum Speed (km / h)	30
最大爬坡度(°) Maximum Gradeability	30°
最小转弯半径(mm) Minimum Turning Radius (mm)	5300
最小离地间隙(mm) Minimum Ground Clearance (mm)	380

### 发动机 Diesel Engine

型号：玉柴 4105增压  
额定功率：85kw  
Model: Yuchai 4105 Turbo-charged  
Rated Power: 85kw

### 变速箱 Gearbox

型号：ZL-280动力换挡变速箱  
档位：4前进 4后退  
Model: ZL-280 Power Shift Gearbox  
Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-35D  
Equipment Model:EJBC-35D

### 维护加注量 Service Refill Capacities

燃油箱：120升  
液压系统总容量：120升  
机油：16升  
Fuel Tank: 120 liters  
Total Hydraulic System Capacity: 120 liters  
Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43  
泵:CBGQ 2040/2080  
马达:海特克  
Reducer: HJ80-43  
Dual Gear Pump: CBGQ 2040/2080  
Hydraulic Motor: HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积:620L  
供水方式:时间继电器  
Tank Volume: 620L  
Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量：.....4740L 滚筒旋转速度：.....18-21转/分钟 混凝土产量：.....3.5立方米/罐

“重型”球星鞍座上安装的反力架可以180°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 4740L Drum Rotation Speed: .....18-21 rpm Concrete yield: ..... 3.5m<sup>3</sup> / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

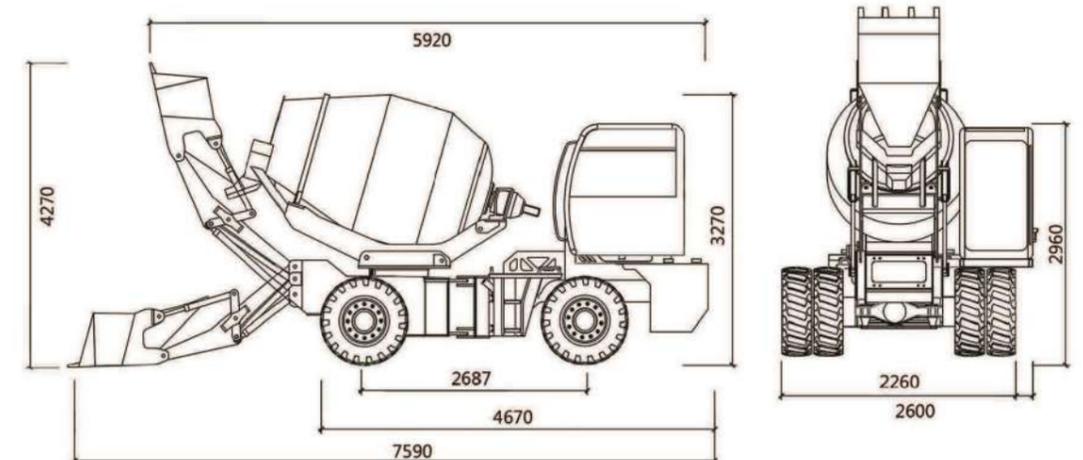



# E2.6方C款/(270°)

▶▶自上料搅拌机

罐体驾驶室同步旋转



### 整车参数 Vehicle Parameters

外形尺寸 (L×W×H)	7100×2750×4100
Overall Dimensions (L × W × H)	
轴距(mm)	2650
Wheelbase (mm)	
整备质量(kg)	7800
Curb Weight (kg)	
驱动形式	变矩器 Torque converter
Drive Form	
最高车速(km/h)	30
Maximum Speed (km / h)	
最大爬坡度(°)	30°
Maximum Gradeability	
最小转弯半径(mm)	5300
Minimum Turning Radius (mm)	
最小离地间隙(mm)	380
Minimum Ground Clearance (mm)	

### 发动机 Diesel Engine

型号: 玉柴 4102增压  
 额定功率: 75kw  
 Model: Yuchai 4102 Turbo-charged  
 Rated Power: 75kw

### 变速箱 Gearbox

型号: ZL-280动力换挡变速箱  
 档位: 4前进 4后退  
 Model: ZL-280 Power Shift Gearbox  
 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-26C  
 Equipment Model:EJBC-26C

### 维护加注量 Service Refill Capacities

燃油箱: 120升  
 液压系统总容量: 120升  
 机油: 16升  
 Fuel Tank: 120 liters  
 Total Hydraulic System Capacity: 120 liters  
 Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43  
 泵:CBG9 2050/2032  
 马达:海特克  
 Reducer: HJ80-43  
 Dual Gear Pump: CBG9 2050/2032  
 Hydraulic Motor: HYTEK

### 供水系统参数 Water Supply System Parameters

水箱容积:500L  
 供水方式:时间继电器  
 Tank Volume: 500L  
 Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....3580L 滚筒旋转速度: .....13-20转/分钟 混凝土产量: .....2.6立方米/罐

“重型”球铰座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 3580L Drum Rotation Speed: .....13-20 rpm Concrete yield: ..... 2.6m³ / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

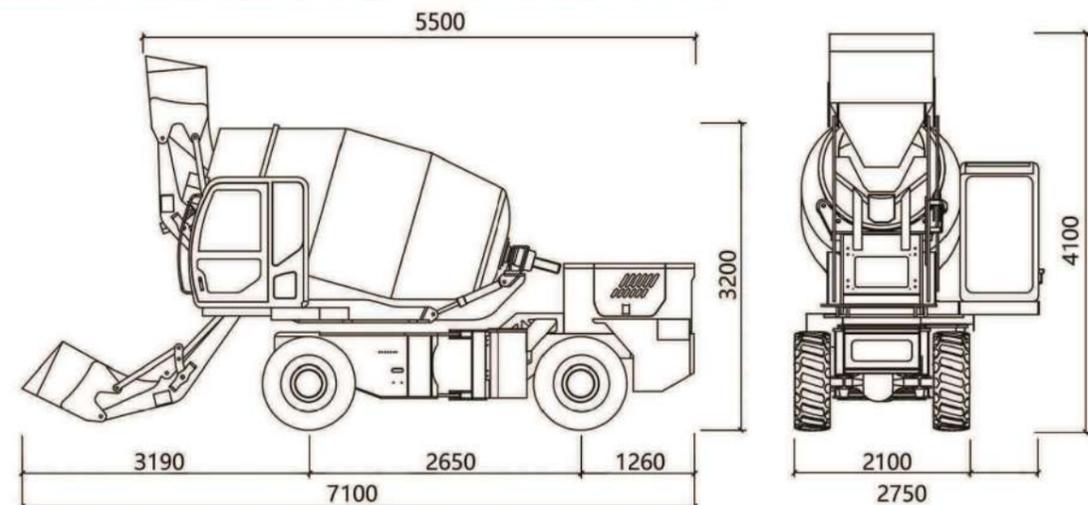

- 主要液压部件全部进口!
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度!
- 不用混凝土运输车!
- 不用装载机上料!
- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



# E2方/(270°)

▶▶自上料搅拌机

罐体驾驶室同步旋转



### 整车参数 Vehicle Parameters

外形尺寸(L×W×H)	6950×2720×3850
Overall Dimensions(L×W×H)	6950×2720×3850
轴距(mm)	2520
Wheelbase(mm)	2520
整备质量(kg)	6300
Curb Weight(kg)	6300
驱动形式	变矩器 Torque converter
Drive Form	变矩器 Torque converter
最高车速(km/h)	35
Maximum Speed(km/h)	35
最大爬坡度(°)	40°
Maximum Gradeability	40°
最小转弯半径(mm)	5300
Minimum Turning Radius(mm)	5300
最小离地间隙(mm)	380
Minimum Ground Clearance(mm)	380

### 发动机 Diesel Engine

型号: 玉柴4102增压  
 额定功率: 75kw  
 Model: YUCHAI 4102 Turbo-charged  
 Rated Power: 75kw

### 变速箱 Gearbox

型号: ZL-265动力换挡变速箱  
 档位: 4前进 4后退  
 Model: ZL-265 Power Shift Gearbox  
 Gearshift: 4 Forward +4 Back

### 常规参数 Conventional parameters

设备型号:EJBC-20C  
 Equipment Model:EJBC-20C

### 维护加注量 Service Refill Capacities

燃油箱: 75升  
 液压系统总容量: 75升  
 机油: 16升  
 Fuel Tank: 75 liters  
 Total Hydraulic System Capacity: 75 liters  
 Oil: 16 liters

### 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43 Reducer: HJ80-43  
 双联泵:50/32 Dual Gear Pump: 50/32  
 马达:摆线125 Hydraulic Motor: 125

### 供水系统参数 Water Supply System Parameters

水箱容积:500L  
 供水方式:时间继电器  
 Tank Volume: 500L  
 Water Supply: Time Relay

### 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。


滚筒几何容量: .....3500L 滚筒旋转速度: .....18-21转/分钟 混凝土产量: .....2.0立方米/罐

“重型”球星鞍座上安装的反力架可以270°液压旋转，并且通过液压式制动器自动锁上。滚筒旋转通过齿轮泵和开路中的摆线液压马达实现，在操作室内和搅拌机后部拥有手动电气阀。滚筒通过2个双作用千斤顶升至水平位置。卸载溜槽通过1个手动可调式手柄控制倾斜，可以90°旋转，但是不能和搅拌滚筒的倾斜操作同步进行。可拆卸溜槽可以保证直接通过料斗卸载。作为标准配置提供2个溜槽延长部件。

The double-cone mixing drum has double-spiral mixing screws and convex bottom.

Mixing Drum Geometrical Capacity: ..... 3500L Drum Rotation Speed: .....18-21 rpm Concrete yield: .....2m³ / Batch

The counterweight mounted on the heavy duty saddle can be hydraulically slewed at 270° and automatically locked by a hydraulic brake. The drum rotation is achieved by gear pump and cycloidal hydraulic motor in open circuit with a manual electric valve in the driver's cabin and in the rear of the mixer. The drum rises to horizontal position through two double-acting jacks. The unloading chute is tilted by a manually adjustable handle and can be rotated by 90°, but can not be synchronized with the tilting operation of mixing drum. Removable chutes ensure unloading directly through the hopper. Two chute extensions are provided as standard.

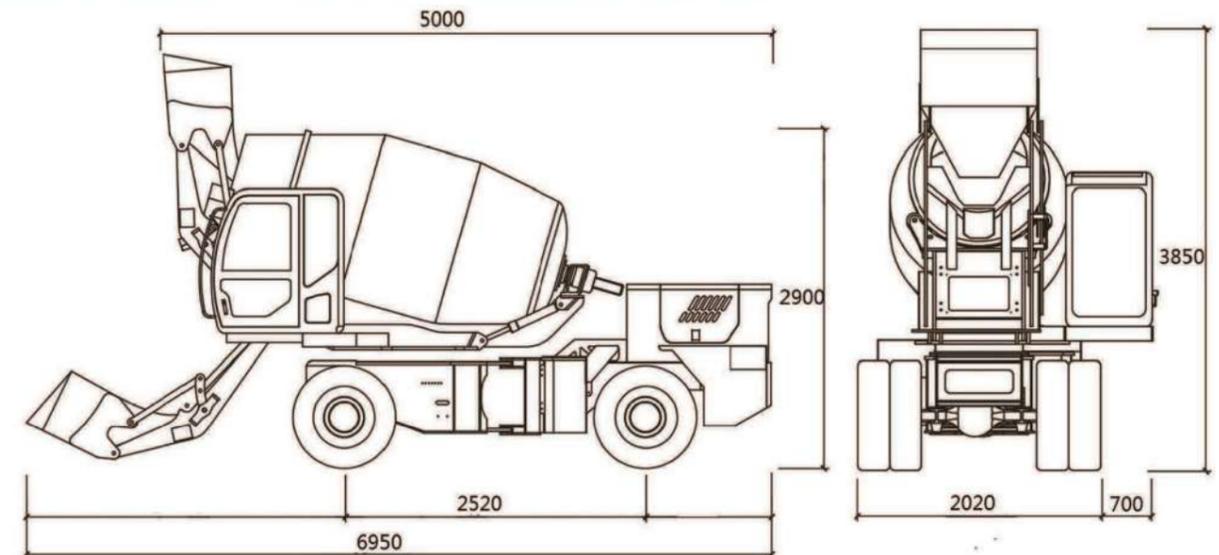

- 主要液压部件全部进口！
- 每天工作量最少省5个人工。
- 不用搅拌机每天省电100度！
- 不用混凝土运输车！
- 不用装载机上料！

- The main hydraulic components are all imported!
- Save 5 labours at least every day.
- Don't need electric concrete mixer, save electricity up to 100 degrees every day.
- Don't need concrete mixer truck anymore!
- Don't need wheel loader to load material anymore!



# E1.8方

▶▶ 自上料搅拌车



## 整车参数 Vehicle Parameters

外形尺寸 (L×W×H)	7300×2650×3750
Overall Dimensions (L × W × H)	
轴距(mm)	2600
Wheelbase (mm)	
整备质量(kg)	6000
Curb Weight (kg)	
驱动形式	变矩器 Torque converter
Drive Form	
最高车速(km/h)	30
Maximum Speed (km / h)	
最大爬坡度(°)	30°
Maximum Gradeability	
最小转弯半径(mm)	5270
Minimum Turning Radius (mm)	
最小离地间隙(mm)	280
Minimum Ground Clearance (mm)	

## 维护加注量 Service Refill Capacities

燃油箱: 63升  
 液压系统总容量: 63升  
 机油: 16升  
 Fuel Tank: 63 liters  
 Total Hydraulic System Capacity: 63 liters  
 Oil: 16 liters

## 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。  
 滚筒几何容量: .....2680L 滚筒旋转速度: .....13转/分钟 混凝土产量: .....1.8立方米/罐  
 The double-cone mixing drum has double-spiral mixing screws and convex bottom.  
 Mixing Drum Geometrical Capacity: ..... 2680L Drum Rotation Speed: ..... 13 rpm Concrete Yield: ..... 1.8 m<sup>3</sup> / Batch

## 发动机 Diesel Engine

型号:云内490增压  
 额定功率:58kW  
 可选装玉柴4102增压  
 额定功率: 75 kW  
 Model: Yunnei 490 Turbo-charged  
 Rated Power:58kW  
 Optional Engine: Yuchai 4102 Turbo-charged  
 Rated Power: 75 kW

## 液压系统参数 Parameters of Hydraulic System

减速机:HJ80-43 Reducer: HJ80-43  
 泵:CBFC 50/40 Dual Gear Pump: CBFC 50/40  
 马达:BM5-160 Hydraulic Motor: BM5-160

## 变速箱 Gearbox

型号:ZL-265变速箱  
 档位:4前进 4后退  
 Model: ZL-265 Power Shift Gearbox  
 Gearshift: 4 forward 4 back

## 常规参数 Conventional parameters

设备型号:EJBC-18  
 Equipment Model:EJBC-18

## 供水系统参数 Water Supply System Parameters

水箱容积:400L  
 供水方式:时间继电器  
 Tank Volume: 400L  
 Water Supply: Time Relay

# E1.2方

自上料搅拌车▶▶



## 整车参数 Vehicle Parameters

外形尺寸 (L×W×H)	7300×1800×3450
Overall Dimensions (L × W × H)	
轴距(mm)	2560
Wheelbase (mm)	
整备质量(kg)	4920
Curb Weight (kg)	
驱动形式	变矩器 Torque converter
Drive Form	
最高车速(km/h)	30
Maximum Speed (km / h)	
最大爬坡度(°)	30°
Maximum Gradeability	
最小转弯半径(mm)	4700
Minimum Turning Radius (mm)	
最小离地间隙(mm)	280
Minimum Ground Clearance (mm)	

## 维护加注量 Service Refill Capacities

燃油箱: 63升  
 液压系统总容量: 63升  
 机油: 16升  
 Fuel Tank: 63 liters  
 Total Hydraulic System Capacity: 63 liters  
 Oil: 16 liters

## 搅拌和卸载 Mixing and Unloading

双锥形滚筒拥有双螺旋形搅拌螺杆和中凸底部。  
 滚筒几何容量: .....1700L 滚筒旋转速度: .....13转/分钟 混凝土产量: .....1.2立方米/罐  
 The double-cone mixing drum has double-spiral mixing screws and convex bottom.  
 Mixing Drum Geometrical Capacity: ..... 1700L Drum Rotation Speed: ..... 13 rpm Concrete Yield: ..... 1.2 m<sup>3</sup> / Batch

## 发动机 Diesel Engine

型号:云内490增压  
 额定功率:58kW  
 Model: Yunnei 490 Turbo-charged  
 Rated Power: 58kW

## 液压系统参数 Parameters of Hydraulic System

减速机: KY07-2-0  
 泵:CBFC 50/32  
 马达:BM5-125  
 Reducer: KY07-2-0  
 Dual Gear Pump: CBFC 50/32  
 Hydraulic Motor: BM5-125

## 变速箱 Gearbox

型号:ZL-265变速箱  
 档位:4前进 4后退  
 Model: ZL-265 Power Shift Gearbox  
 Gearshift: 4 forward 4 back

## 常规参数 Conventional parameters

设备型号:EJBC-12  
 Equipment Model:EJBC-12

## 供水系统参数 Water Supply System Parameters

水箱容积:400L  
 供水方式:时间继电器  
 Tank Volume: 400L  
 Water Supply: Time Relay