

## GUINEA PIG CAGES

### INDIVIDUAL CAGES FOR GUINEA PIGS

---

The individual ZONLAB cages for guinea pigs provide ideal conditions for animal husbandry in terms of size and shape and are also easy to use.

Depending on the material selected, the cage trays are heat-resistant up to max. 90°C or max. 120°C.






# GUINEA PIG CAGES

## INDIVIDUAL CAGES FOR GUINEA PIGS

The guinea pig cages are accommodated on mobile racks with autoclavable castors, two of them are equipped with locking device.

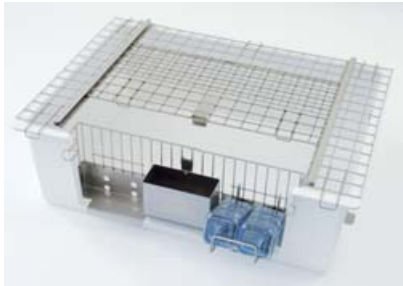

MZK 80/25L with complete cover lid



Guinea pig house



MZK 80/25L with raised cover lid for mouse and rat housing

Type	Material	Dimensions (W x D x H) in mm	Order no.
MZK80/25-L guinea pig cage	LURAN, heatresistant to max. 90 °C	810 x 610 x 260	3045320
Front grid, MZK-V	Stainless steel (AISI 304)	-	5043901
Cover lid with sliding opening, MZK-A	Stainless steel (AISI 304)	-	5043902
Feed container, FUMZK	Stainless steel (AISI 304)	-	5083724
Bottle holder for 2 bottles, 750 ml, FH 75/2	Stainless steel (AISI 304)	-	5121003
Water bottle, 750 ml, with groove, F 75	Polycarbonate	72 x 72 x 180	3125004
Silicone sealing ring, SDR 1	Silicone	-	3125101
Bottle cap incl. 40 mm tube with ball closure, TK-40	Stainless steel (AISI 304)	-	3125042
Rack for 4 cages, GM 4	Stainless steel (AISI 304)	905 x 670 x 1,650	5053103
Rack for 5 cages, GM 5	Stainless steel (AISI 304)	905 x 670 x 1,940	5053101
Rack for 8 cages [2 cages per level], GM/8	Stainless steel (AISI 304)	1,760 x 745 x 1,650	5053106
Rack for 10 cages [2 cages per level], GM/10	Stainless steel (AISI 304)	1,760 x 745 x 1,940	5053102
<b>Options for guinea pig cages</b>			
Guinea pig cages MZK80/25-N	NORYL, heatresistant to max. 120 °C	810 x 610 x 260	3045321
Cover lid with sliding opening, 100 mm raised, habitat height 350 mm	Stainless steel (AISI 304)	-	5043904
Water bottle, 750 ml, with groove, F 75 PSU	Polysulfone	72 x 72 x 180	3125016
Wire grid for cage floor, mesh gap approx. 10 x 30 mm, MZK-EB	Stainless steel (AISI 304)	-	5013080
Guinea pig house, autoclavable, stackable, non-toxic	Polycarbonate	205 x 157 x 115	3084051
Automatic nipple drinking device, AT-80/25	Stainless steel (AISI 304)	-	5054040
Nipple hole (circular hole, 40 mm), required on each cage for automatic nipple drinking device	Stainless steel (AISI 304)	40 mm Ø	2351001
<b>Option for mouse and rat housing</b>			
Cover lid with sliding opening, 100 mm raised	Stainless steel (AISI 304)	-	5043905
Water bottle, 250 ml, with groove, F 25	Polycarbonate	54 Ø x 145	3125014

Subject to technical modifications.