



Product Details

Whether you need a continuous system with bespoke angles or an 'off-the-shelf' - surface, suspended, or recessed fitting, Athena is the solution.

- 4 styles - Direct, Blade, Matrix and Geo
- 3 body sizes (40mm, 60mm and 80mm widths) and a range of colour options
- Tool-free - snap-shut installation
- Mymesh Ready



Product Specification

Colour Temperature (k)	3000	4000
Colour Rendering Index (CRI)	80	
MacAdam SDCM	3	
MacAdam SDCM	3	
Ingress Protection (IP)	IP20	
Average Lifespan (Hr)	72,000	
Operating Temperature Range (°C)	-25	+35

Electrical Specification

Voltage (V)	220-240
Frequency (Hz)	50-60
Electrical Protection	Class I

Luminaire Options

Emergency	3hr	3hr Dali	
Dimming	0-10v	Dali	Switch
Distribution	Direct	Direct / Indirect	
Body Size	40mm*	60mm	80mm
Diffusers	Prismatic	Opal	

Low Output Performance

Product Code	Output	Colour	Wattage	Efficacy
Athena 800mm				
ATH L8 LED12	1122	840	9.2	121.6
ATH L8 LED16	1519	840	12.9	117.8
ATH L8 LED20	1928	840	17.6	109.5
Athena 1200mm				
ATH L12 LED16	1496	840	12.1	123.6
ATH L12 LED21	2026	840	17.2	117.8
ATH L12 LED26	2571	840	23.4	109.9
Athena 1500mm				
ATH L15 LED19	1870	840	15.1	123.8
ATH L15 LED26	2532	840	21.5	117.8
ATH L15 LED33	3214	840	29.3	109.7

Medium Output Performance

Product Code	Output	Colour	Wattage	Efficacy
Athena 800mm				
ATH L8 LED24	2360	840	17.7	133.3
ATH L8 LED33	3237	840	25.2	128.5
ATH L8 LED41	4002	840	31.6	126.6
Athena 1200mm				
ATH L12 LED32	3142	840	24.4	128.7
ATH L12 LED44	4311	840	34.7	124.2
ATH L12 LED54	5336	840	44.1	121
Athena 1500mm				
ATH L15 LED40	3930	840	29.9	131.4
ATH L15 LED54	5392	840	42.5	126.8
ATH L15 LED67	6670	840	54	123.5

Please Note: Due to the continuous development of our products we reserve the right to amend or make changes at anytime without prior notification. Data tolerance range of +/-10%. For the most up to date information please visit our website.




Low Output Performance

Product Code	Output	Colour	Wattage	Efficacy
Athena 2500mm				
ATH L25 LED34	3366	840	27.3	123.3
ATH L25 LED46	4559	840	38.8	117.5
ATH L25 LED58	5785	840	49.2	117.6


Medium Output Performance

Product Code	Output	Colour	Wattage	Efficacy
Athena 2500mm				
ATH L25 LED71	7072	840	54.3	130.2
ATH L25 LED98	9704	840	77.2	125.6
ATH L25 LED121	12006	840	98.1	122.4


Body & End Cap Colours



Accessories



Dimensions

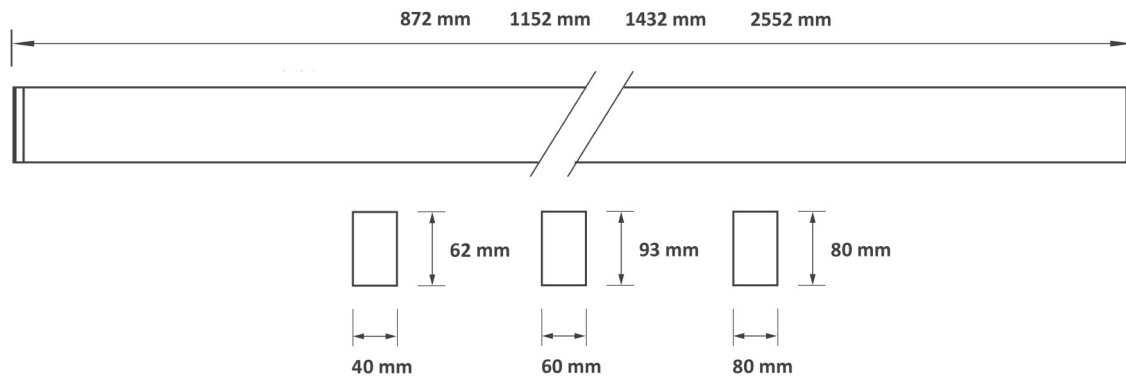

	ATH L8			ATH L12			ATH L15			ATH L25		
Length	872	872	872	1152	1152	1152	1432	1432	1432	2552	2552	2552
Width (mm)	40	60	80	40	60	80	40	60	80	40	60	80
Height (mm)	62	93	80	62	93	80	62	93	80	62	93	80
Weight (kg)	1.31	1.96	2.61	1.73	2.6	3.47	2.15	3.23	4.31	3.84	5.76	7.68

Notes

Athena recessed only available in 60 & 80mm body sizes. *Athena Blade 40mm only available with Medium Output LED's.