



BPO LIGHTING

Hazardous Location LED Imports



FEATURES & SPECIFICATIONS:

Construction/Optical

- Die cast aluminum housing ensures excellent thermal dissipation
- Tempered glass lens ensures minimal lumen depreciation
- 120° distribution pattern standard, also available in 40°, 60°, 90° and 140°

Electrical System

- Maximum Output 28,000 lumens at 200 watts
- 140 lumens per watt
- Operating Temperature -40°C TO 60°C
- Driver operates at 120-277v, 50/60 Hz
- CRI > 70 at 5000K
- 5 year warranty when installed per instructions

HLL-R SERIES

EXPLOSION PROOF LED

CLASS I, DIVISION 2

CLASS II, DIVISION 1

CLASS II, DIVISION 2

CLASS III

LISTINGS:


- NEMA 4X
- IP67
- UL1598/UL1598A/UL844
- CSA C22.2 No.137/N o.250.0
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups E, F, G
- Class III
- Marine and Wet Locations
- IECEX
- ATEX

APPLICATIONS:

- Paint Booths
- Waste Water Treatment Plants
- Shipyard Facilities
- Coastal Marine Areas
- Chemical Plants
- Pharmaceutical Plants
- Cold Storage Facilities
- Hazardous Storage Areas
- Corrosive Environments

OPTIONS:

- Various Distribution Patterns (120° Standard)
- 480V (120-277v Standard)

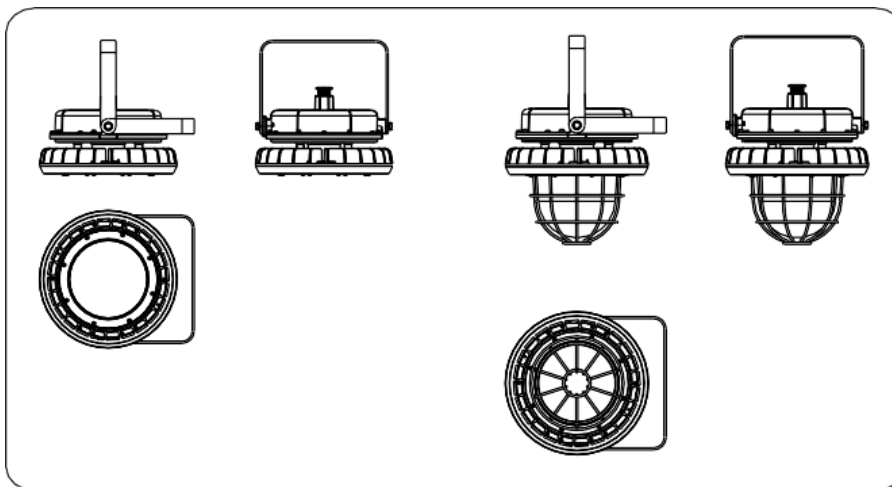

Hazardous Location LED Imports

www.bpolighting.com

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536

HLL-R SERIES

ORDERING INFORMATION

SERIES/LENGTH

HLL-R

SERIES
HLL-R

LED WATTAGE

LED WATTAGE
40 = 40W (5,600 LUMENS)
60 = 60W (8,400 LUMENS)
80 = 80W (11,200 LUMENS)
100 = 100W (14,000 LUMENS)
150 = 150W (21,000 LUMENS)
200 = 200W (28,000 LUMENS)

VOLTAGE

U


VOLTAGE
U = 120-277V (50/60 HZ)
480 = 200-480V

OPTIONS


OPTIONS
40 = 40° DISTRIBUTION
60 = 60° DISTRIBUTION
90 = 90° DISTRIBUTION
(120° STANDARD)
40K = 4000K
(5000K STANDARD)

ADDITIONAL MOUNTING OPTIONS


25° Pole Stanchion

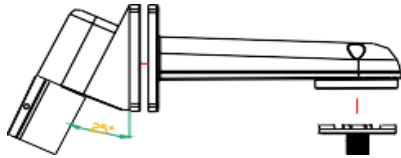









Pole Stanchion

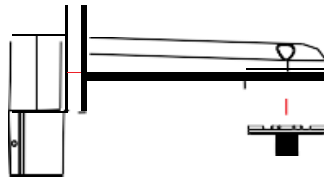

Wall Arm

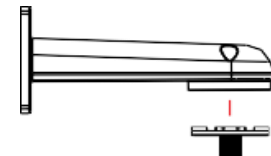

DISTRIBUTION PATTERNS

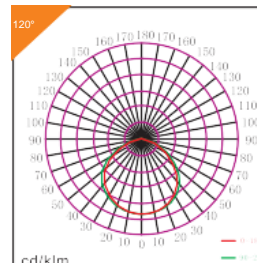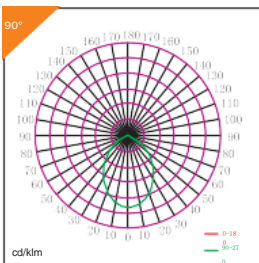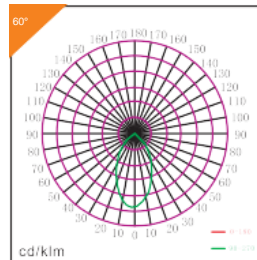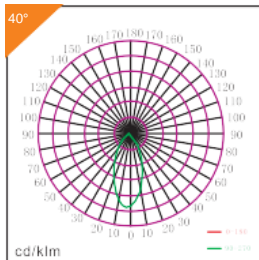

Hazardous Location LED Imports

www.bpolighting.com

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536