



**BPO LIGHTING**

*Hazardous Location LED Imports*



## HLL-H SERIES

**HAZARDOUS LOCATION  
LED LINEAR**

- Class I/Division 2, Groups A, B, C & D
- Class II/Division 1, Groups E, F & G
- Class II/Division 2, Groups E, F & G
- Class III
- UL 1598A Marine Listed
- UL 1598
- UL 844
- NEMA 4X
- IECEX
- ATEX
- IP 66
- IK 10

### SPECIFICATIONS

Voltage: 100 - 277vAC  
200 - 480vAC  
Listings: CI/D2 Groups A, B, C & D  
CII/DI Groups E, F & G

Ambient Temperatures: -40°C to 60°C

T – Rating: T4

Housing: Copper Free Aluminum

Lens: Polycarbonate

Wattage: 30w / 40w / 60w / 80w

Efficacy: 140 lm/w

Lifetime: 70,000 hrs. at L70  
CRI: >70 Cool White  
Dist: 120\*  
Pwr Factor: >.95  
CCT: 5000K Standard  
Weight: 2' 8.8 lbs., 4' 12.12 lbs.  
Dims: 2' - 24" x 5.5" x 8.1"  
4' - 47.5" x 5.5" x 8.1"  
NPT: 3/4"  
Warranty: 5 Year Limited

***Hazardous Location LED Imports***

[www.bpolighting.com](http://www.bpolighting.com)

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536


# HLL-H SERIES EXPLOSION PROOF LED FOR HAZARDOUS LOCATIONS

## ORDERING INFORMATION


SERIES/LENGTH	WATTAGE	VOLTAGE	CCT	MOUNTING
<b>HLL-H#</b>				
<b>SERIES</b> HLL-H2 = 2' HLL-H4 = 4'	<b>WATTAGE</b> <b>2' MODEL</b> 30 = 30W (4,200 LUMENS) 40 = 40W (5,600 LUMENS) <b>4' MODEL</b> 40 = 40W (5,600 LUMENS) 60 = 60W (8,400 LUMENS) 80 = 80W (11,200 LUMENS)	<b>VOLTAGE</b> U = 120-277V HV = 200-480V	<b>CCT</b> Standard 50K = 5000K Optional 40K = 4000K	<b>MOUNTING</b> UB = UNIVERSAL BRACKET SM = SUSPENSION MOUNT PM = PENDANT MOUNT EM = EM BATTERY BACKUP

## MOUNTING OPTIONS


No.1 Ceiling Mounting

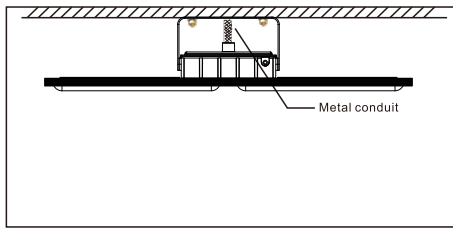

No.2 Pole Bracket Mounting



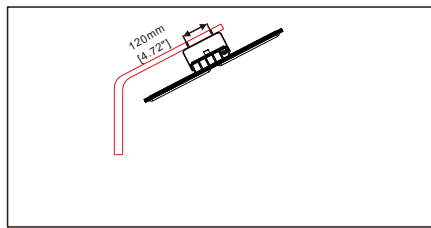


No.3 Wall Mounting






## DIMENSIONS

H2

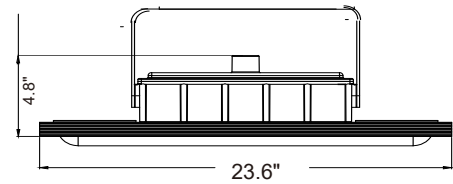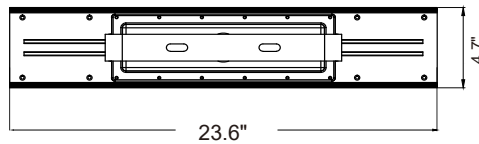

H4

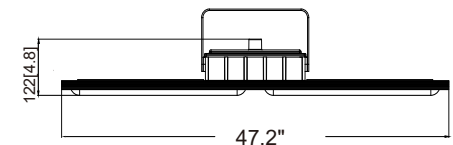

*Hazardous Location LED Imports*

www.bpolighting.com

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536