

## FOR IMMEDIATE SALE

## ONE (1) 2000 AMP GE/HITACHI SF6 CIRCUIT BREAKER

**STOCK NO.** CBK-06-5006



## **SPECIFICATIONS:**

ONE (1) 2000 AMP GE/HITACHI SF6 CIRCUIT BREAKER
TYPE HVB 242 40000
242 KV MAXIMUM
10 K RATED VOLTAGE RANGE
950 KV BIL
3 PHASE
60 HERTZ
40 KA SHORT CIRCUIT
3 CYCLES INTERRUPTING
75 PSIG NORMAL
64 PSIG MINIMUM
220 LBS. GAS


For more information and firm proposal, please contact CTG:



21,000 LBS.
MPR-3 PNEUMATIC OPERATING MECHANISM
WIRING DIAGRAM H24201314
125 VDC CLOSE & TRIP
AMBIENT DESIGN TEMP. - +40 TO -50 DEG. C
HEATING RATING 838 KW, 208 VAC

6 CT'S

## EXTRA CT'S AVAILABLE AT ADDITIONAL COST

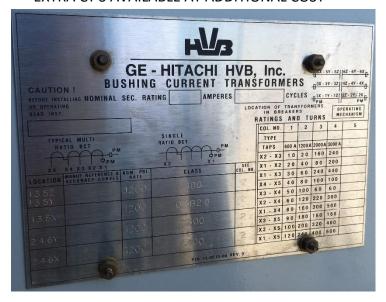



**WARRANTY:** As Is / Where Is **FOB:** Your Truck/Warehouse USA

**PRICE:** Call For Quotation

CTG Power Systems International, LLC (CTG) is the seller of this equipment and will facilitate all aspects of the equipment transaction. CTG's Terms and Conditions governing used surplus equipment will apply. Additional services such as shipping and insurance, engineering and installation are available through CTG and will be performed under a separate contract, if requested. A non-revocable purchase order accompanied by verification of the availability of funds is required. Inspection is encouraged and will be arranged within 72 hours advance notice. Buyer will be required to render a non-refundable deposit of up to 25% of the total purchase price to secure the option to purchase and financial closing with balance due 75% within 30 days of inspection and no later than 5 days prior to load out, whichever event occurs earlier.

For more information and firm proposal, please contact CTG: