



Voltage	Phase	Rated at power factor	Standby KVA	Standby KW	Prime KVA	Prime KW	Amps
380/220 V	3	0,8	134,5	107,6	122,3	97,9	185,8
400/230 V	3	0,8	135,1	108	122,9	98,3	177,4
415/240 V	3	0,8	135,5	108,4	123,3	98,6	171,5

i

HS | STATIONARY RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

Continuous Power (COP): According to Standard ISO 8528-1:2018, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

"Class G2" performance according to the load impact test according to ISO 8528-5:2018

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 | info@himoinsa.com | www.himoinsa.com

Manufacture facilities:
SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA | DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA



STANDARD SOUNDPROOFING



HS50



WATER-COOLED



THREE PHASE



50 Hz



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.





Engine Specifications | 1.500 r.p.m.

Rated Engine Output (PRP)	kW	107,2
Rated Engine Output (ESP)	kW	118,2
Manufacturer	FPT_IVECO	
Model	NEF45TM3	
Engine Type	4-stroke diesel	
Injection Type	Direct	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	4-L	
Bore and Stroke	mm	104 x 132
Displacement	L	4,5
Cooling System	Liquid (water + 50% glycol)	
Lube Oil Specifications	ACEA E3 - E5	
Compression Ratio		17,5:1

Fuel Consumption ESP	l/h	30,4
Fuel Consumption 100% PRP	l/h	27,6
Fuel Consumption 80 % PRP	l/h	21,6
Fuel Consumption 50 % PRP	l/h	14,4
Lube oil consumption with full load		0,5 % of fuel consumption
Total oil capacity including tubes, filters	L	12,8
Total coolant capacity	L	18,5
Governor	Type	Mechanical
Air Filter	Type	Dry
Inner diameter exhaust pipe	mm	70,3




Generator Specifications | STAMFORD

Manufacturer	STAMFORD
Model	UCI274E
Poles	No. 4
Connection type (standard)	Star-series
Mounting type	S-3 11"1/2
Insulation	Class H class

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

WEIGHT AND DIMENSIONS

		Standard Version	Optional version	Optional version
Length (L)	mm	2900	2900	2900
Height (H)	mm	1780	1855	2030
Width (W)	mm	1100	1100	1100
Maximum shipping volume	m ³	5,68	5,92	6,48
Weight with liquids in radiator and sump	Kg	1602	1673	1784
Fuel tank capacity	L	310	485	890
Autonomy (70% PRP)	Hours	16	25	46
Autonomy (100% PRP)	Hours	11	18	32
		Steel tank	Steel tank	Steel tank

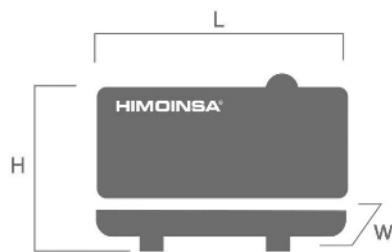

SOUND PRESSURE

Sound pressure level	dB(A)@7m	70 ± 2,4
----------------------	----------	----------

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	540
Maximum allowed back pressure	kPa	5
Heat dissipated by exhaust pipe	KCal/Kwh	590

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	427
Cooling Air Flow	m ³ /s	2,2
Alternator fan air flow	m ³ /s	0,514

STARTING SYSTEM

Starting power	kW	3
Starting power	CV	4,08
Recommended battery	Ah	100
Auxiliary Voltage	Vdc	12

FUEL SYSTEM

Fuel Oil Specifications	Diesel
Fuel Tank	L
Other fuel tank capacities	L



FEATURES OF THE CONTROL UNITS

	M7X	CEM 7	CEA 7	CEC 7	M7X+CEC7
Generator Readings					
Voltage between phases	●	●	●	●	●
Voltage between neutral and phase	●	●	●	●	●
Current intensities	●	●	●	●	●
Frequency	●	●	●	●	●
Apparent power (Kva)	●	●	●	●	●
Active power (Kw)	●	●	●	●	●
Reactive power (kVAr)	●	●	●	●	●
Power factor	●	●	●	●	●
Mains Readings					
Voltage between phases		●	●	●	●
Voltage between phases and neutral			●	●	●
Current intensities			●	●	●
Frequency			●	●	●
Apparent power			●		
Active power			●		
Reactive power			●		
Power factor			●		
Engine Readings					
Coolant temperature	●	●	●		●
Oil pressure	●	●	●		●
Fuel level (%)	●	●	●		●
Battery voltage	●	●	●		●
R.P.M.	●	●	●		●
Battery charge alternator voltage	●	●	●		●
Engine Protections					
High water temperature	●	●	●		●
High water temperature by sensor	●	●	●		●
Low water temperature by sensor	●	●	●		●
Low oil pressure	●	●	●		●
Low oil pressure by sensor	●	●	●		●
Low water level	●	●	●		●
Unexpected shutdown	●	●	●		●
Fuel storage	●	●	●		●
Fuel storage by sensor	●	●	●		●
Stop failure	●	●	●		●
Battery voltage failure	●	●	●		●
Battery charge alternator failure	●	●	●		●
Overspeed	●	●	●		●
Underspeed	●	●	●		●
Start failure	●	●	●		●
Emergency stop	●	●	●	●	●

● Standard

◎ Optional

	M7X	CEM 7	CEA 7	CEC 7	M7X+CEC7
Alternator Protections					
High frequency	●	●	●	●	●
Low frequency	●	●	●	●	●
High voltage	●	●	●	●	●
Low voltage	●	●	●	●	●
Short-circuit	●	●	●		●
Asymmetry between phases	●	●	●	●	●
Incorrect phase sequence	●	●	●	●	●
Inverse power	●	●	●		●
Overload	●	●	●		●
Genset signal drop	●	●	●	●	●
Counters					
Total hour counter	●	●	●	●	●
Partial hour counter	●	●	●	●	●
Kilowatt meter	●	●	●	●	●
Starts valid counters	●	●	●	●	●
Starts failure counters	●	●	●	●	●
Maintenance	●	●	●	●	●
Communications					
RS232		①	①	①	①
RS485		①	①	①	①
Modbus IP		①	①	①	①
Modbus		①	①	①	①
CCLAN		①	①		
Software for PC		①	①	①	①
Analogue modem		①	①	①	①
GSM/GPRS modem		①	①	①	①
Remote screen		①	①		
Tele signal		① (8 + 4)	① (8 + 4)		
J1939	① M7XJ	①	①		① M7XJ
Features					
Alarm history	● (100)	● (100)	● (100)	● (100)	● (100)
External start	●	●	●	●	●
Start inhibition	●	●	●	●	●
Mains failure start		●		●	●
Start under normative EJP	●	●	●		●
Pre-heating engine control	●	●	●		●
Genset contactor activation	●	●	●	●	●
Mains & Genset contactor activation		●		●	●
Fuel transfer control	●	●	●		●
Engine temperature control	●	●	●		●
Manual override	●	●	●		●
Programmable alarms	●	●	●		●
Genset start function in test mode	●	●	●	●	●
Programmable outputs	●	●	●		●
Multilingual	●	●	●	●	●
Special Functions					
GPS Positioning		①	①		
Synchronisation		①	①		
Mains synchronization		①	①		
Second Zero elimination		①	①		
RAM7		①	①		
Remote screen		①	①		

● Standard

◎ Optional





CONTROL PANELS

AS5



Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM7 unit. (*) AS5 as optional with CEA7 unit. Automatic panel without transfer switch and WITH mains control.

AS7



Automatic control panel WITHOUT Transfer Switch and WITHOUT mains control with M7X unit.


Digital control unit M7X

CC2



Himoinsa Switching cabinet WITH display.
Digital control unit CEC7


AS5 + CC2



Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.

Digital control unit CEM7+CEC7

AS7 + CC2

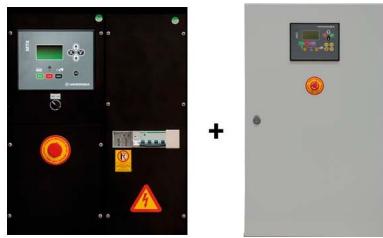

Automatic control panel WITH transfer switch and WITH mains control. The display will be on the genset and on the cabinet.

Digital control unit M7X+CEC7



AC5

Automatic mains failure control panel. Wall-mounted cabinet WITH transfer switch and thermal magnetic protection (depending on current and voltage).
Digital control unit CEA7