



QUATTRO

Newsletter 01-25



- EOS QUATTRO with lower exhaust – available now!



- Mandatory service bulletin

The QUATTRO generator can be damaged by incorrect wiring installation – Please pay attention to the following information:

- It is important to connect the battery negative to the engine ground when using a battery.
- The yellow cable can cause short circuit to the stator/generator when the engine is running. Users must remove the yellow wire from the connector. Please use a simple shrink wrap or something similar to protect the open end and prevent contact.

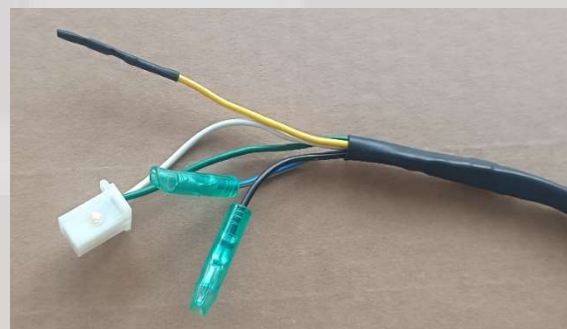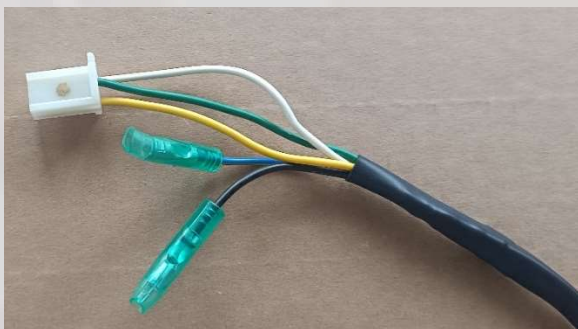


QUATTRO

- **Additional information**

If no battery charging is installed, the rectifier does not need to be installed.

- The engine wiring is delivered as shown in the image below – to the left of the white connector is rectifier, used to to charge the battery. On the right side of the connector is the ignition system wiring harness.

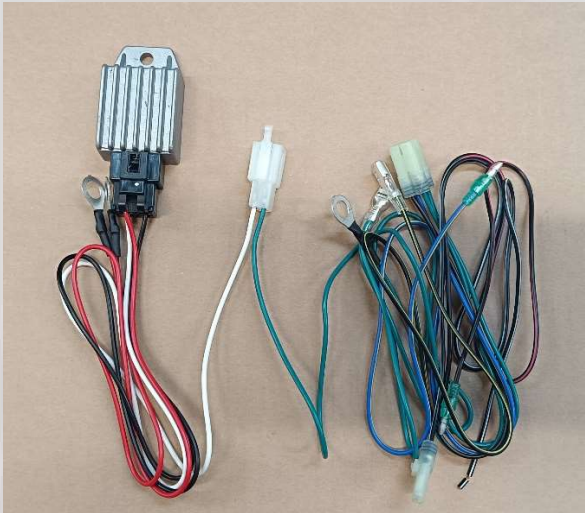

- If you don't wish to charge the battery you can disconnect the white cable from the connector and discard the rectifier.

