
First clean the area where the support goes, and put some tape to protect from scratches.





Then present the piece and mark the fixing holes

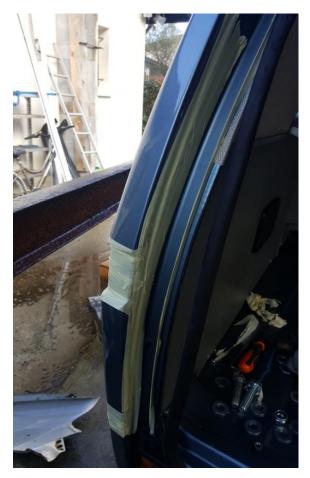

Remove the tape and repaint to protect from rust



Introduce the fixing plate through the gap of the air inlet

Present the wheel carrier and adjust the Uniball ball joints to leave it flat





Once straight, present the closure bracket and mark the holes. As before, first protect with tape





Mount the closure bracket and the internal reinforcement plate



Now mount the wheel and test. If we see that it drops a little with the weight of the wheel, adjust by turning the

corresponding uniball ball joint ...

And enjoy !!!