


SNORKEL MOUNTING INSTRUCTIONS



**First thing is to take out the grill, and the original air intake.
Left side if diesel, right side if gasoline**

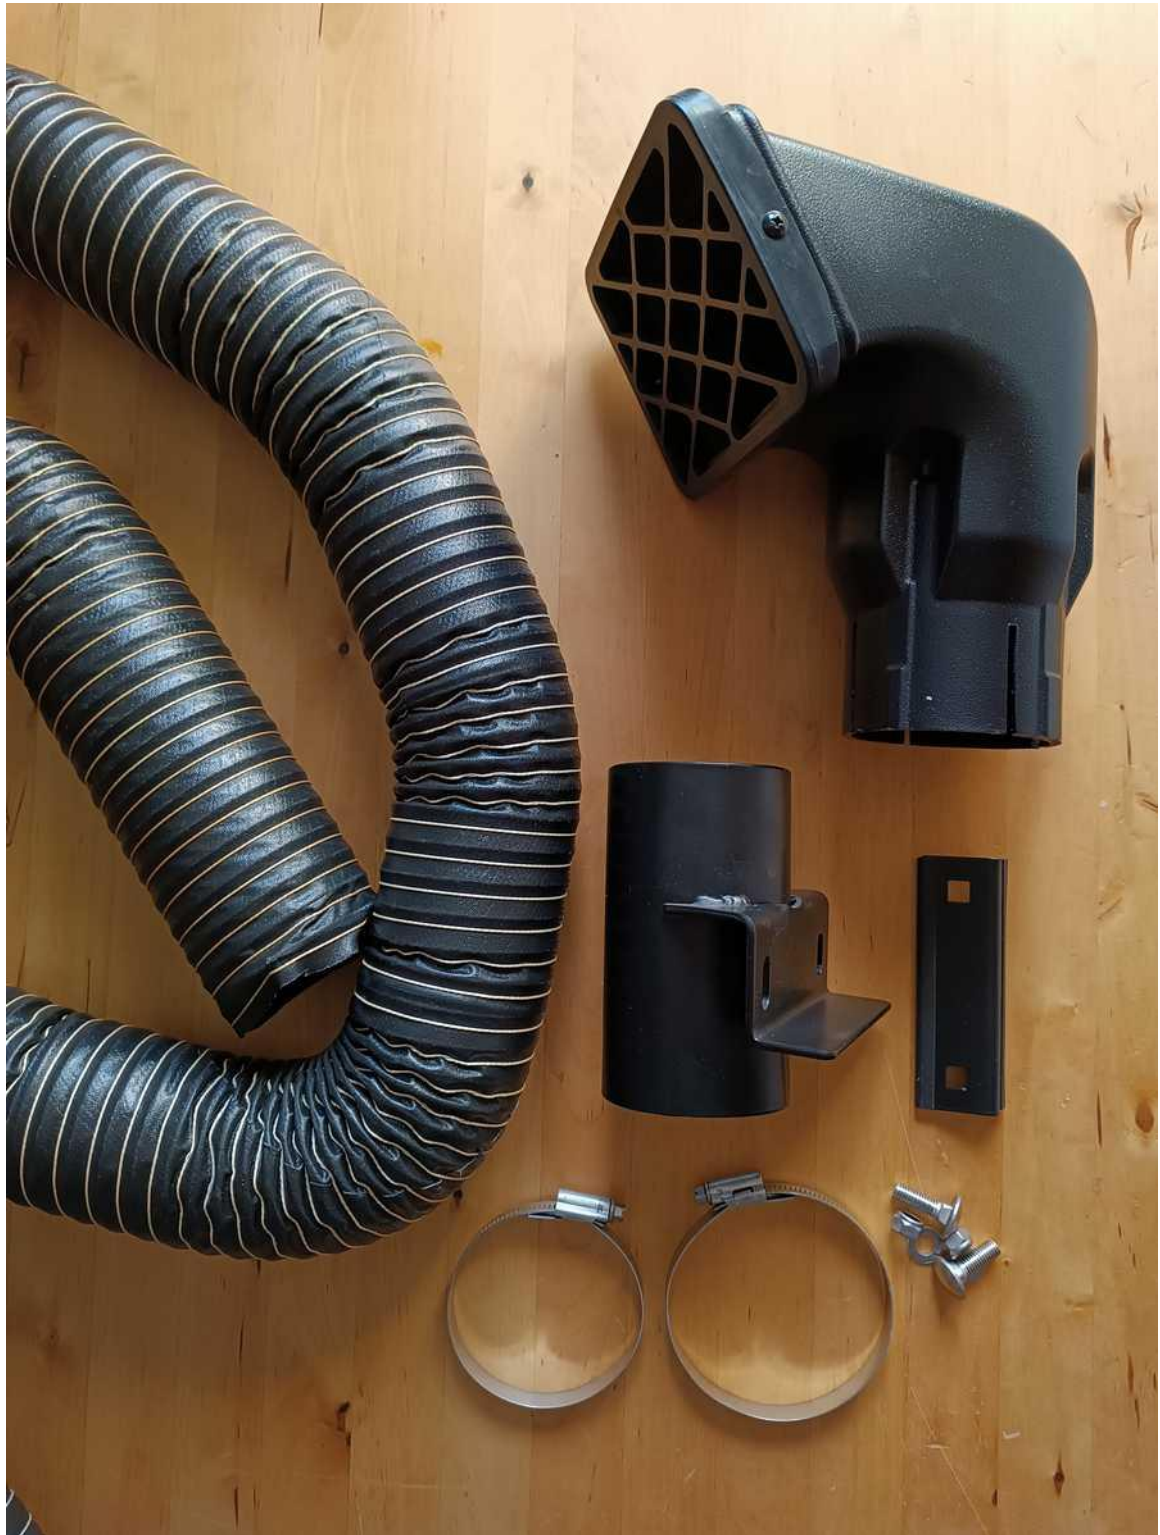

Then the rear light, and you take out the rest of the tube



Now you have to pass the new tube squashing it (all but about 40cm or 15") slightly until it reaches the bottom



**On
ce
don**



e, you must let some original pieces, because there's a hole to let the water out.

(If you dont have them, pease ask. We have the needed pieces for diesel and gasoline, but they need a cyclone prefilter)



Now we have to do a hole in the grill and pass the tube throw it



Place the tube on the adapter, the adapter in place, and then the snorkel head.





**Please be careful with the water.
The evacuation hole may not be
enough (check from time to time
to avoid clogging)**

**If it rains, it is best to position
the air intake towards the rear to
avoid damage. If not, the best is
to install a 3" cyclone pre filter.**

**If you don't have the original intake for the air filter, we have it for
you**

