

 **CARLIKE**®  **PREMIUM+**
CAR WRAPPING VINYL
CARLIKE - MAKE YOUR CAR SPECIAL





CARLIKE, launched in 2012 as a brand of SINO GROUP, mainly focus on premium car wrapping vinyls, with rich colors and stylish designs. High performance with economic price is always the pursuit of CARLIKE.



Matte Electro

Metallic Vinyl

Gloss Electro

Metallic Vinyl

Chameleon Electro

Metallic Vinyl

Macaron Vinyl



Mysterious Chrome

Rainbow Vinyl

Iridescence

Laser Vinyl

Magic Coral

Vinyl

Chrome Ceramics

Vinyl

PRODUCT CATALOGUE



Paint Metallic

Vinyl

Aluminum Brushed

Vinyl

Printed Camouflage

Vinyl

Super Gloss Vinyl



Carbon

Fiber Vinyl

PET Original

Paint Vinyl

TPU Car Wrap

Vinyl

TPU Paint

Protection Film



Super Stretch

CARLIKE™ vinyl wrap is made by high polymeric pvc film.

With very high stretchability, the film is very easy to wrap for the curves and full car body.

Kneading



After Heating




Incredible Restorable

When you use the film if the film wrinkled heating membrane can be restored




Super Density
Air Channels

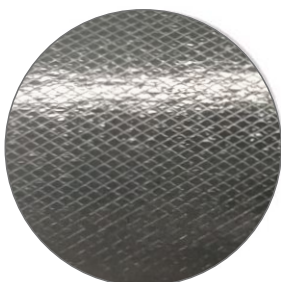


Removable Glue

Solvent-based acrylic low viscosity glue
Professional honeycomb air channels
after remove non residual glue
Do not damage the original paint


PRODUCT TECHNOLOGY




**HIGH
POLYMERIC**




**AIR FREE
TECH+**



**MICRO
AIR CHANNEL**



**REMOVABLE
GLUE**



**SUPER
STRETCH**



**QUALITY
GUARANTEED**



5000 Series - TPU Color PPF

Heat Self Healing

Super Stretchable

Super Gloss

Anti Scratch

Bright Colors

5 Years Warranty



Optical PET Top Layer


Polyurethane Coating

Non-yellowing TPU

Multilayer Color Function Layer

Solvent-based Adhesive

PET Releaser Liner

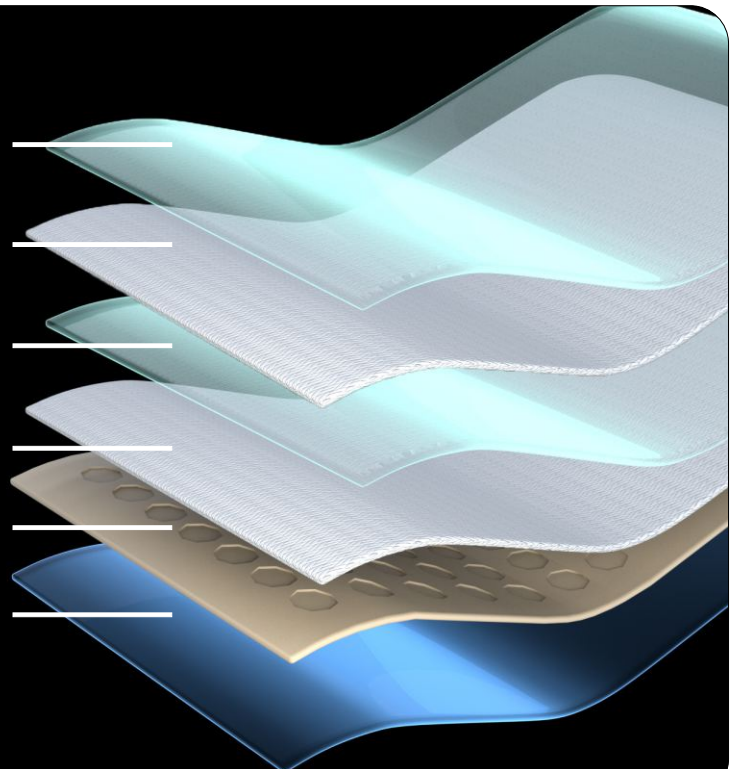




3000 Series - PET

New Premium + Car Wrapping Vinyl

- + Double casting film
- + Super air channels
- + PET release paper
- + Smooth surface
- + No cellulite

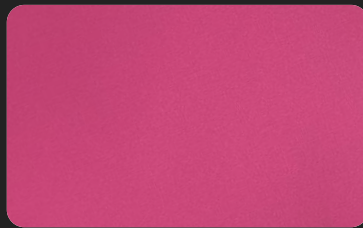


VS




New 3000 Series - PET
Surface without cellulites

Normal Quality
Surface with cellulites

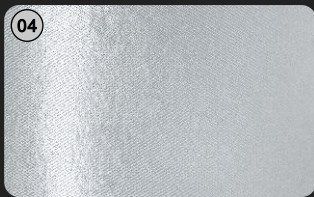



04
Glue layer super air channels

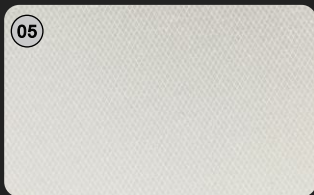

05
PET transparent release paper


- 01. Top film layer
- 02. Color layer
- 03. Bottom film layer
- 04. Glue layer
- 05. PET transparent release paper

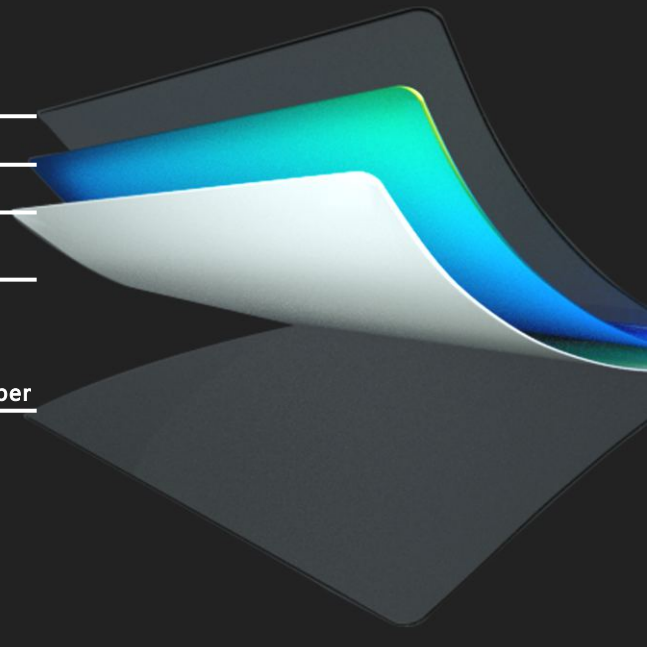

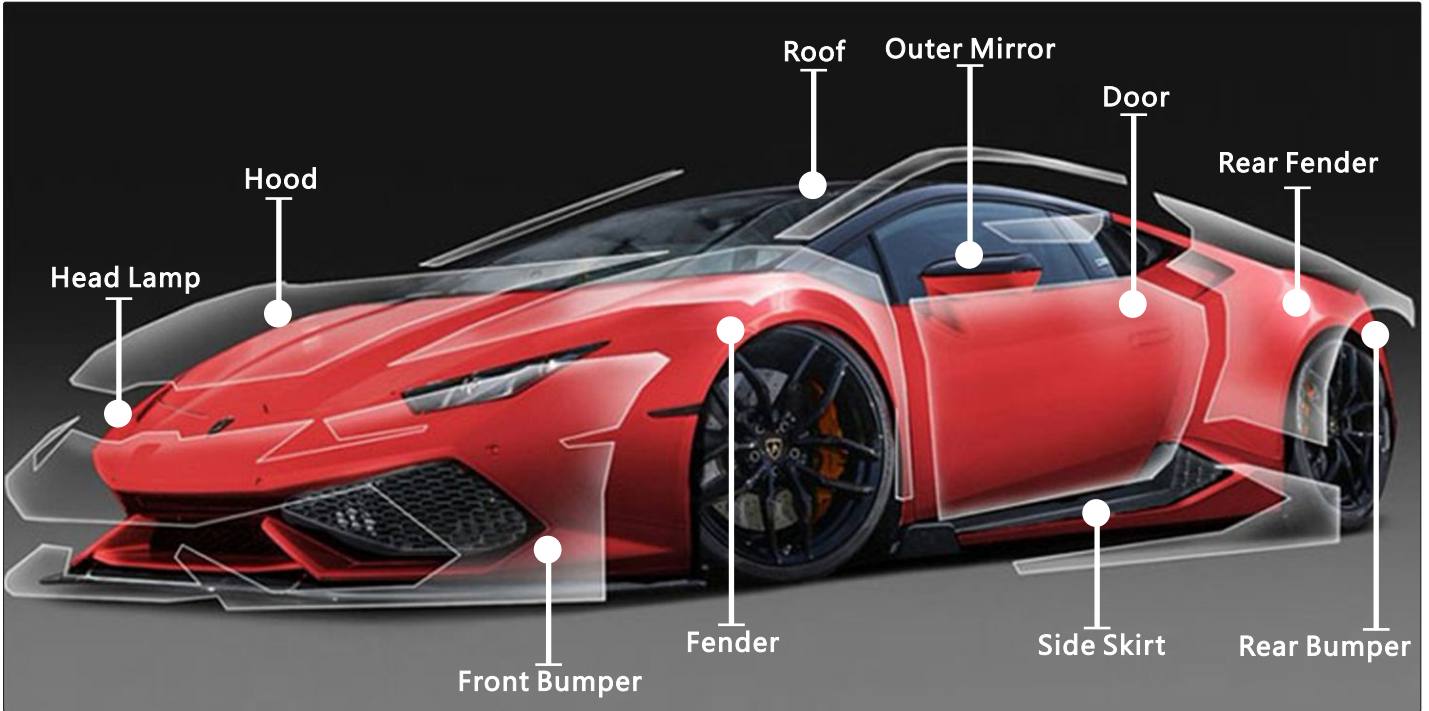

TPU PPF

- Heat healing
- Anti-yellowing
- Scratch resistance
- Car paint brightness increased 40%

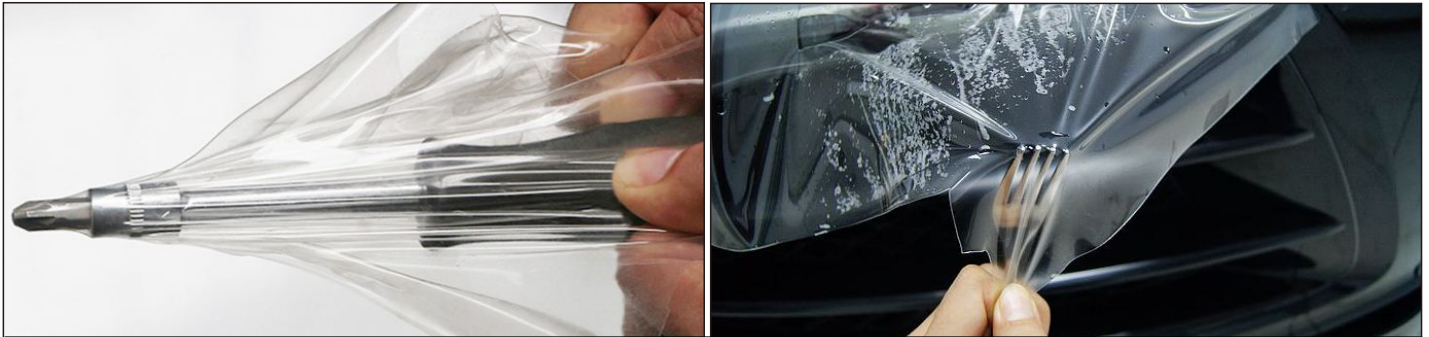

Super toughness & Anti-scratched
The vinyl can be restored after heating





CARLIKE[®] **PREMIUM+**
CAR WRAPPING VINYL
CARLIKE - MAKE YOUR CAR SPECIAL



TPU PPF

- + Heat Healing
- Anti-yellowing
- ✓ 360° Protection



1. Spray water on it



2. Stick it on car body



3. Stretch it to flat



**4. Use squeegee and heat gun,
get bubbles out**



5. Cut off extra part



6. Finished

Car Wrap Vinyl Data Sheet

Item	Size	Quality warranty	Substrate material	Pressure sensitive adhesive	Releaser liner	Tear strength	Viscosity	Peel strength	Temperature resistance	Flourescent ultraviolet test
CARLIKE 3000P Series	1.52x17M 5x56FT	2 Years	100-130 Microns High Polymeric PVC	30µm Solvent-based Removable	100G PET High density air channels	37.2 N/10mm Test Method: ASTM D3759	Initial tack: 700-800g/25mm After 24 hours: 1800-2000g/25mm After 3 months: 1500g/25mm	2.5N/25mm Test Method: ASTM D3330	-40°C to +120°C	Gray Level: 4-5 Test Method: ASTM D4329-13A
CARLIKE 3000 Series	1.52x17M 5x56FT	2 Years	100-130 Microns High Polymeric PVC	30µm Solvent-based Removable	160G double PE coating High density air channels	37.2 N/10mm Test Method: ASTM D3759	Initial tack: 700-800g/25mm After 24 hours: 1800-2000g/25mm After 3 months: 1500g/25mm	2.5N/25mm Test Method: ASTM D3330	-40°C to +120°C	Gray Level: 4-5 Test Method: ASTM D4329-13A
CARLIKE 5000 Series TPU Color PPF Heat Self Healing	1.52x16.5M 5x54FT	5 Years	160Microns Non-yellowing TPU 10Microns Polyurethane Coating	30µm Solvent-based Removable	100G PET	60 N/10mm Test Method: ASTM D3759	Initial tack: 700-800g/25mm After 24 hours: 1800-2000g/25mm After 3 months: 1500g/25mm	2.5N/25mm Test Method: ASTM D3330	-40°C to +120°C	Gray Level: 4-5 Test Method: ASTM D4329-13A

TPU Paint Protection Film Data Sheet

Number	Item	Size	Quality warranty	Coating thickness	Substrate material	Pressure sensitive adhesive	Elongation at break	Tear strength	Viscosity	Peel strength
CL-TPU-P10	10Mil Gloss Transparent	1.52x15M/5x49FT	10 Years	0.5Mil	8.5Mil USA Lubrizol	1Mil USA Ashland Glue	400%	64KN/m	449.0N/m	16N/25mm
CL-TPU-P8	8.5Mil Gloss Transparent	1.52x15M/5x49FT	7 Years	0.5Mil	7Mil USA Lubrizol	1Mil USA Ashland Glue	380%	61KN/m	449.0N/m	16N/25mm
CL-TPU-P7	7.5Mil Gloss Transparent	1.52x15M/5x49FT	7 Years	0.5Mil	6Mil USA Lubrizol	1Mil USA Ashland Glue	350%	60KN/m	449.0N/m	16N/25mm
CL-TPU-P6	6.5Mil Gloss Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	5Mil USA Lubrizol	1Mil USA Ashland Glue	320%	56KN/m	449.0N/m	16N/25mm
CL-TPU-P7M	7.5Mil Matte Transparent	1.52x15M/5x49FT	7 Years	0.5Mil	6Mil USA Lubrizol	1Mil USA Ashland Glue	350%	60KN/m	449.0N/m	16N/25mm
CL-TPU-U10	10 Mil Gloss Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	8.5Mil USA Lubrizol	1Mil USA Ashland Glue	360%	64KN/m	449.0N/m	15.9N/25mm
CL-TPU-U8	8.5 Mil Gloss Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	7Mil USA Lubrizol	1Mil USA Ashland Glue	340%	61KN/m	449.0N/m	15.9N/25mm
CL-TPU-U7	7.5 Mil Gloss Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	6Mil USA Lubrizol	1Mil USA Ashland Glue	320%	60KN/m	449.0N/m	15.9N/25mm
CL-TPU-U6	6.5 Mil Gloss Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	5Mil USA Lubrizol	1Mil USA Ashland Glue	300%	56KN/m	449.0N/m	15.9N/25mm
CL-TPU-U7M	7.5 Mil Matte Transparent	1.52x15M/5x49FT	5 Years	0.5Mil	6Mil USA Lubrizol	1Mil USA Ashland Glue	320%	60KN/m	449.0N/m	15.9N/25mm
CL-TPU-UBL	7.5Mil Gloss Black	1.52x15M/5x49FT	5 Years	0.5Mil	6Mil USA Lubrizol	1Mil USA Ashland Glue	320%	60KN/m	449.0N/m	15.9N/25mm

TPU Paint Protection Film

Series	5000
Warranty	5 / 7 / 10 Years
Brand	CARLIKE®
Size	1.52x15M/5x49FT
Raw material	USA material
Model number	CL-TPU
Characteristic	Heat repair
Film thickness	190micron, 7.6mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	5-7 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	40.7 N/10mm
Peel adhesion	2.1 N
Gray Level	4-5




TPU Paint Protection Film

Series	5000
Warranty	5 Years
Brand	CARLIKE®
Size	1.52x15M/5x49FT
Raw material	USA material
Model number	CL-TPU
Characteristic	Heat repair
Film thickness	190micron, 7.6mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	5-7 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	40.7 N/10mm
Peel adhesion	2.1 N
Gray Level	4-5




TPU Car Wrap Vinyl	
Series	5000
Warranty	5 Years
Brand	CARLIKE®
Size	1.52x16.5M/5x54FT
Raw material	USA material
Model number	CL-TPU
Characteristic	Heat repair
Film thickness	190micron, 7.6mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	5-7 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	40.7 N/10mm
Peel adhesion	2.1 N
Gray Level	4-5

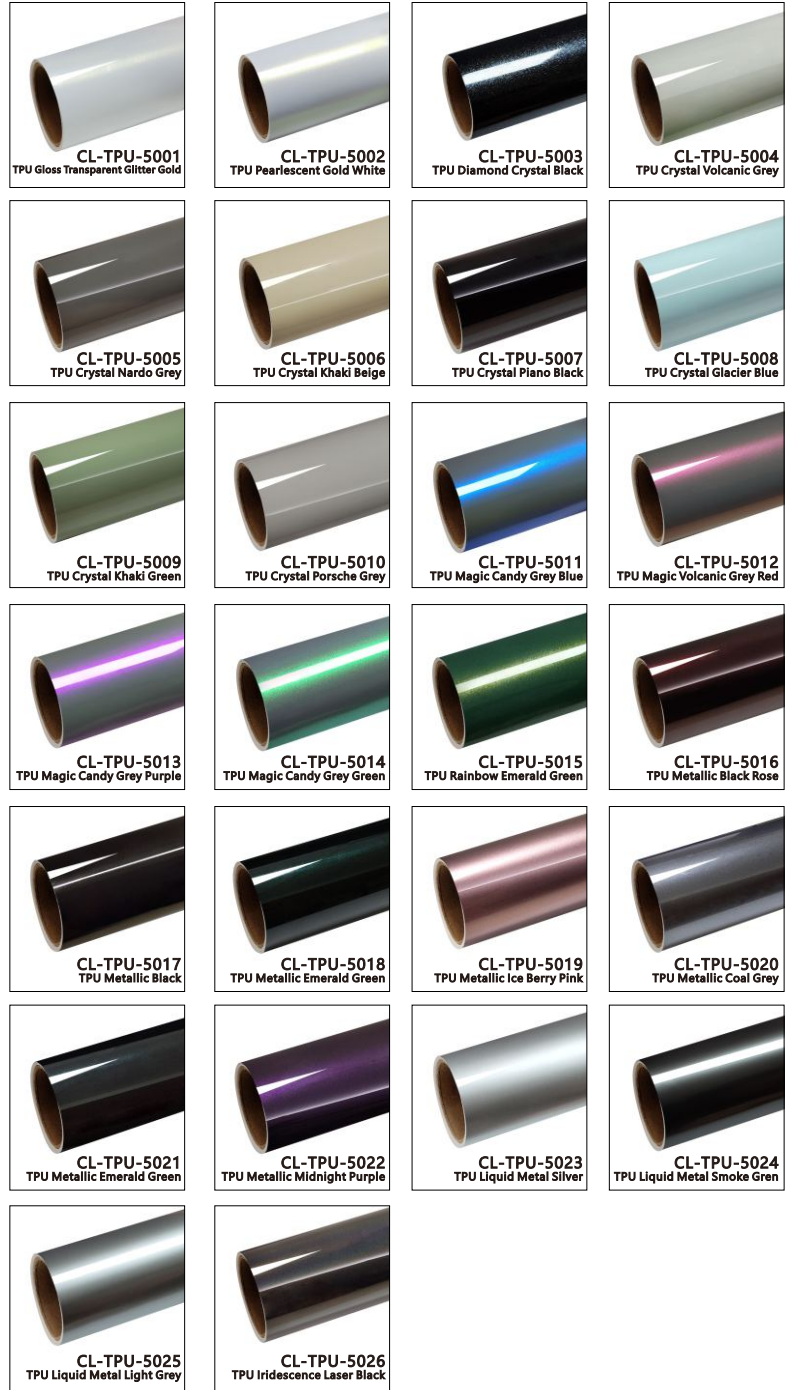


PET Super Gloss Crystal Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-SJ
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

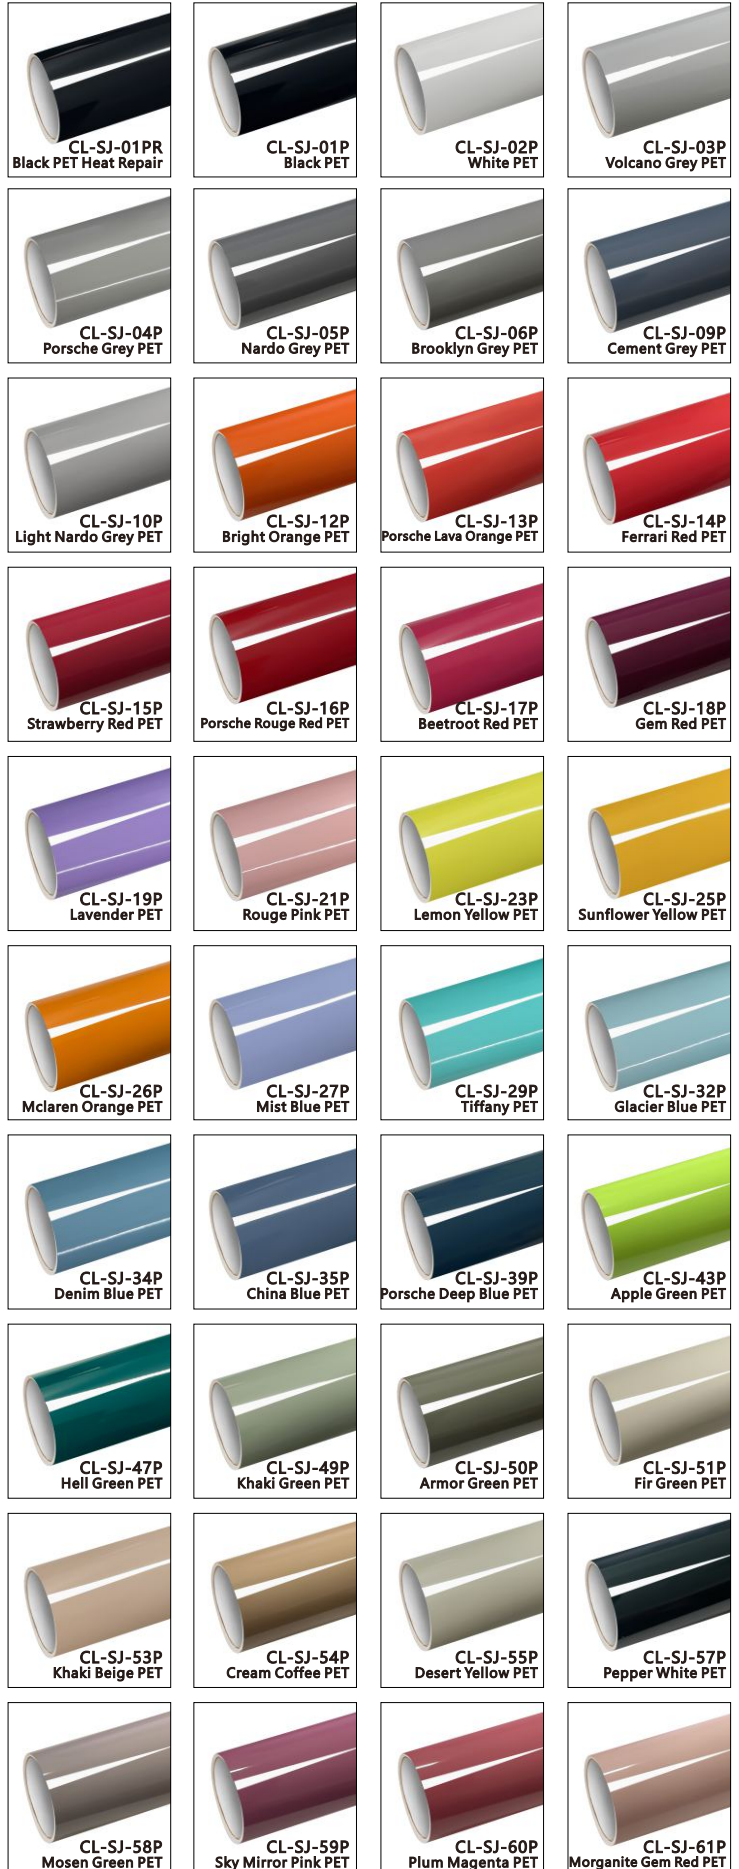


PET Original Paint Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-OP
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

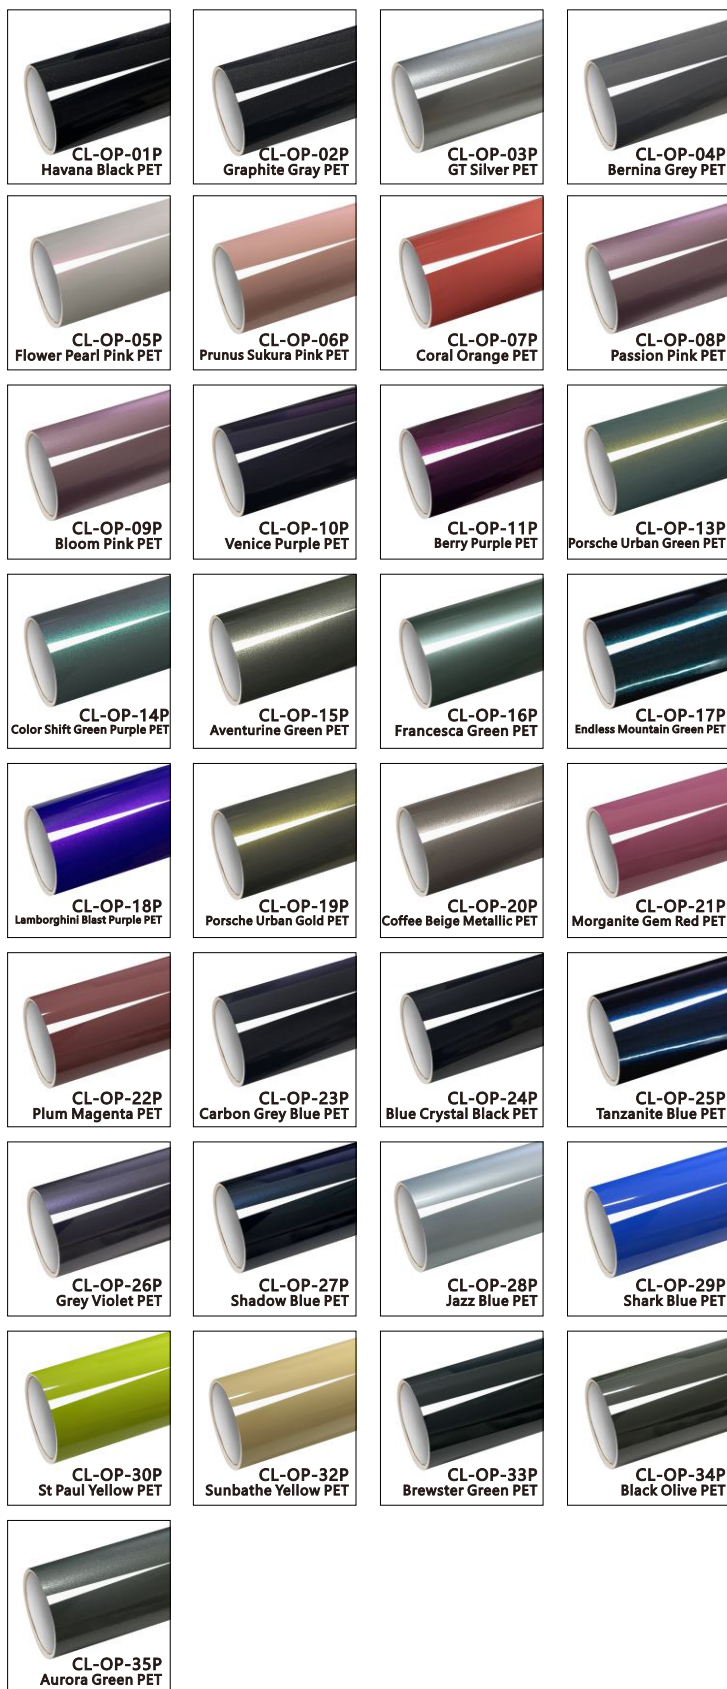


PET Super Chameleon Ambilight Vinyl


Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-CS-01P
Thunder Lightning PET




CL-CS-02P
Fancy Galactic PET




CL-CS-04P
Green Purple PET




CL-CS-05P
Ghost Black Red PET




CL-CS-06P
Madeira Red Black PET



CL-CS-07P
Sunset PET



CL-CS-08P
Opal Green PET




CL-CS-09P
Sunrise PET




CL-CS-10P
Lemon Honey PET

PET Ambilight Metallic Vinyl


Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-AM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.3mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




CL-AM-05P
Satin Blue Gold PET




CL-AM-06P
Gloss Blue Gold PET



CL-AM-07P
Satin Green Gold PET



CL-AM-08P
Gloss Green Gold PET



CL-AM-09P
Carpi Grey Purple PET



CL-AM-12P
Gloss Rainbow Emerald Green PET

PET Chameleon Diamond Crystal Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CD
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Super Chrome Oxide Vinyl


Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CO
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Diamond Crystal Vinyl	
Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-DC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Gloss Electro Metallic Vinyl	
Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-EG
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

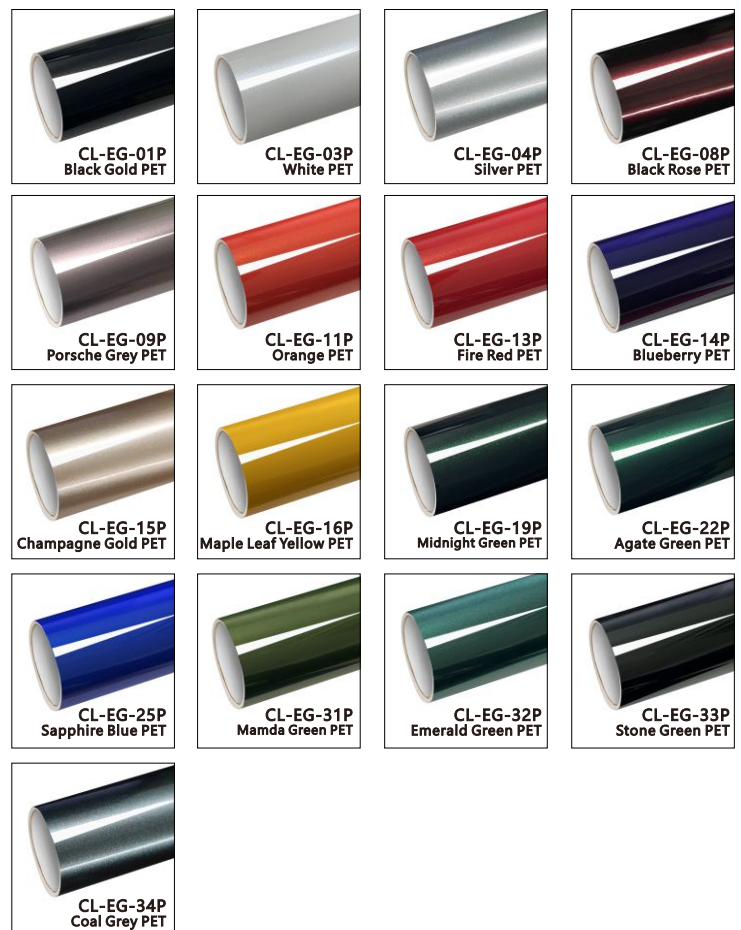


PET Iridescence Laser Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-IL
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Liquid Metallic Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-LM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Super Chameleon Ambilight Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-MC-11P
Grey Blue PET



CL-MC-12P
Volcano Grey PET



CL-MC-14P
Grey Violet PET



CL-MC-16P
Grey Green PET



CL-MC-19P
Rouge Pink PET

PET Chameleon Magic Gold Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MD
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-MD-01P
Gloss Red Grey PET

PET Macaron Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MK
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Pearl Magic Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Pearlescent White Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-PW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Ultra Matte Satin Metallic Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-US
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



PET Paint Metallic Vinyl

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-PM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-PM-04P
Sonoma Green PET




CL-PM-05P
Cherry Red PET




CL-PM-07P
Soul Red PET



CL-PM-08P
Purple PET




CL-PM-12P
Solar Eclipse Gold PET




CL-PM-14P
Midnight Blue PET

PET Simulation Carbon Fiber

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-RCF
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	140micron, 5.5mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-RCF-01P
Gold/Black PET

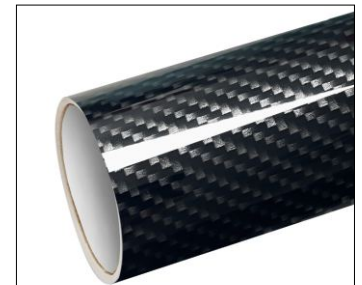

CL-RCF-03P
Silver/Black PET

PET Forged Carbon Fiber

Series	3000P
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CFF
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	190micron, 7.5mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-CFF-01P
Gloss Red PET



CL-CFF-02P
Gloss Black PET



CL-CFF-03P
Gloss Silver PET




CL-CFF-11P
Matte Red PET



CL-CFF-12P
Matte Black PET

Super Chameleon Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-CS-03
Aurora Blue Purple




CL-CS-06
Madeira Red Black



CL-CS-07
Sunset

Diamond Crystal Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-DC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Chameleon Diamond Crystal Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CD
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Chameleon Electro Metallic Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CE
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

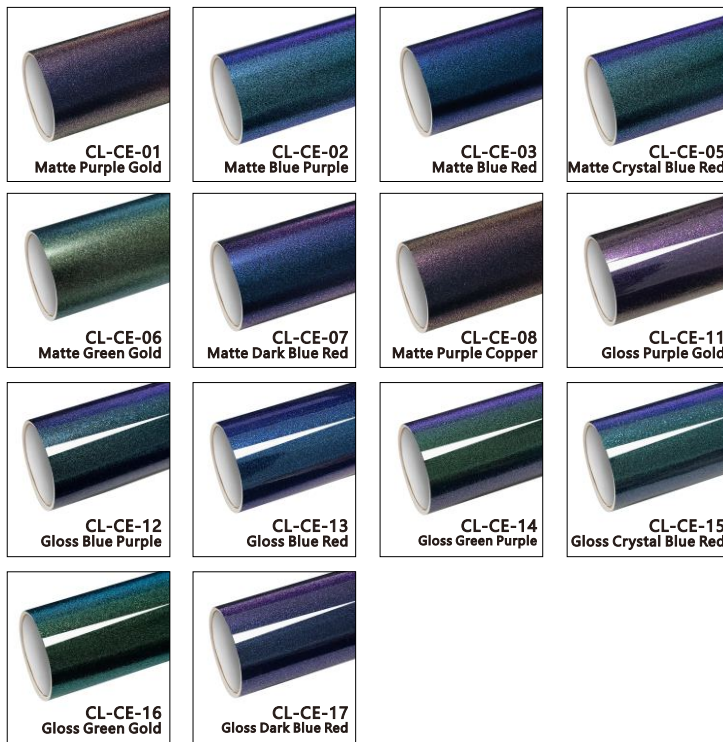


Sparkling Ghost Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-SP
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

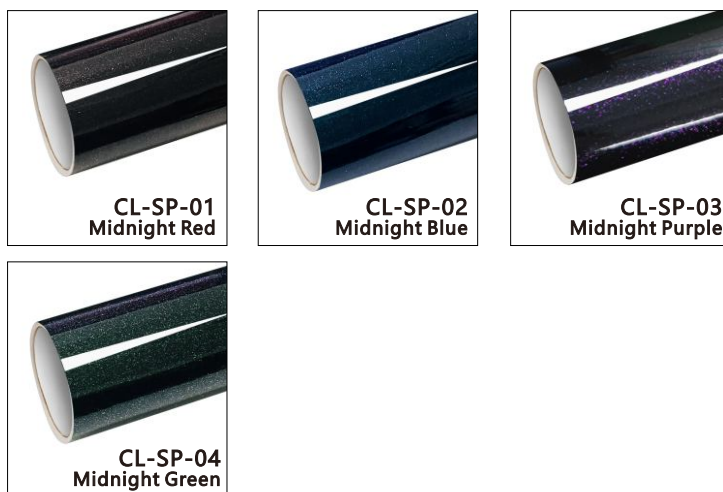


Chameleon Magic Gold Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MD
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

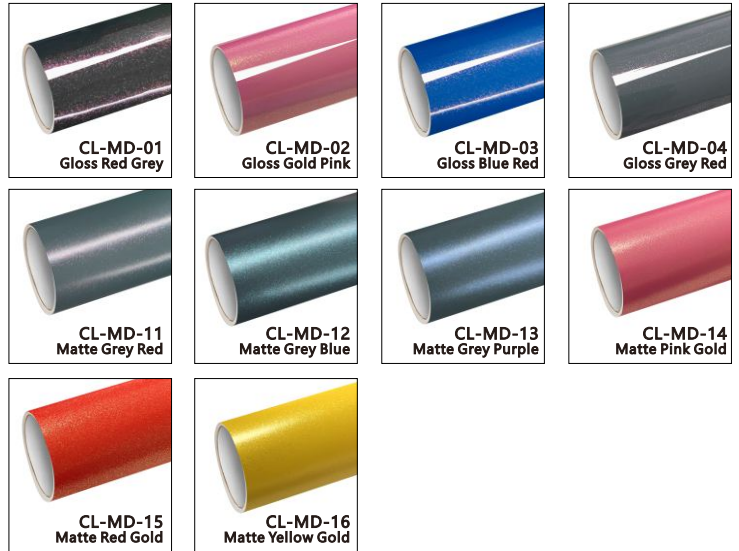

Aurora White Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-AW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

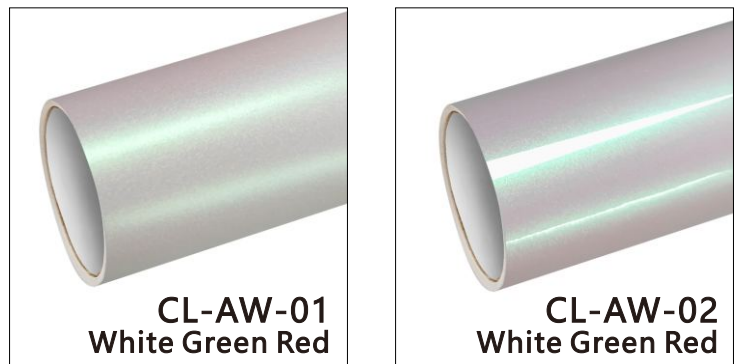

Pearl Magic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Pearlescent White Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-PW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Gloss Crystal Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-SJ
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Chameleon Candy Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Ambilight Metallic Vinyl


Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-AM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Paint Metallic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-PM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

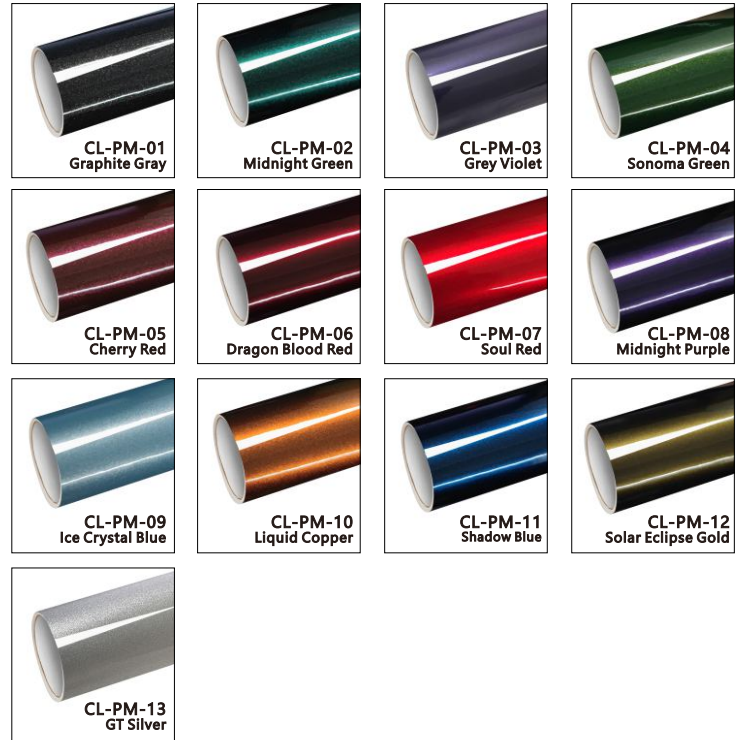


Original Paint Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-OP
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

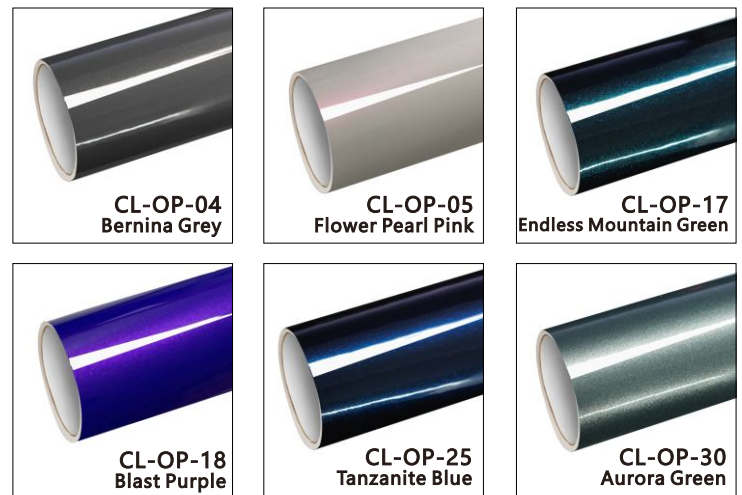


Liquid Metallic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-LM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

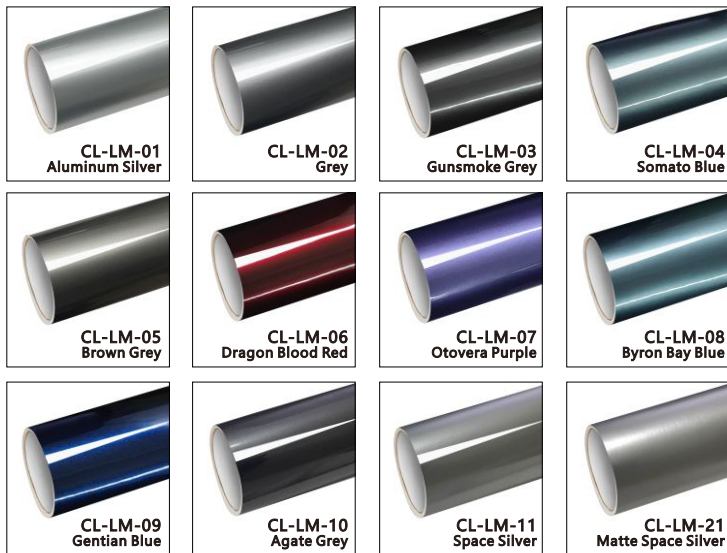

Iridescence Laser Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-IL
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

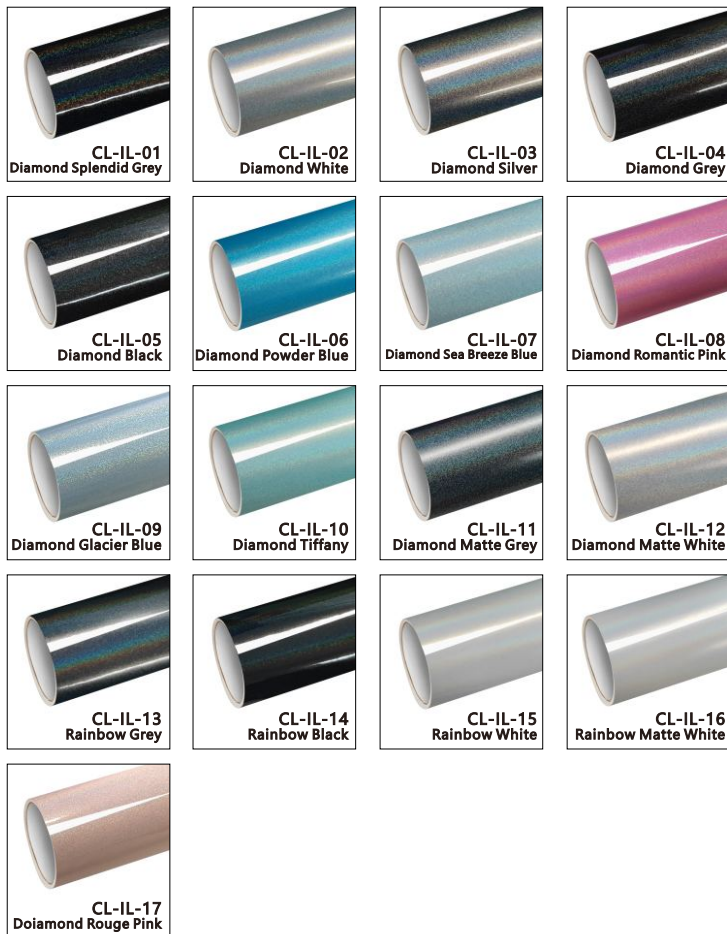


Gloss Electro Metallic Vinyl	
Series	3000
Warranty	3 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-EG
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

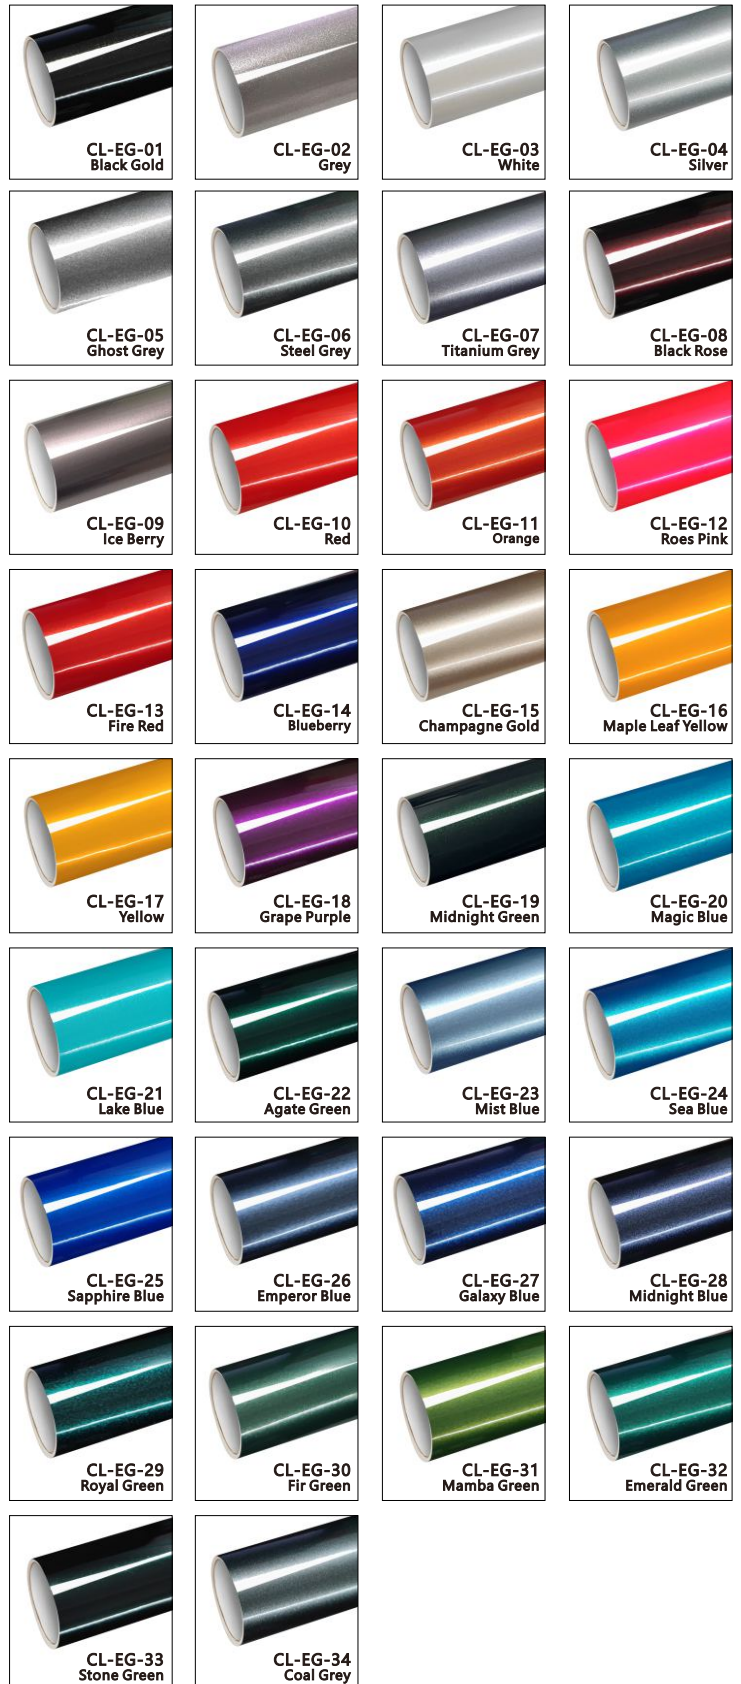

Magic Chameleon Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

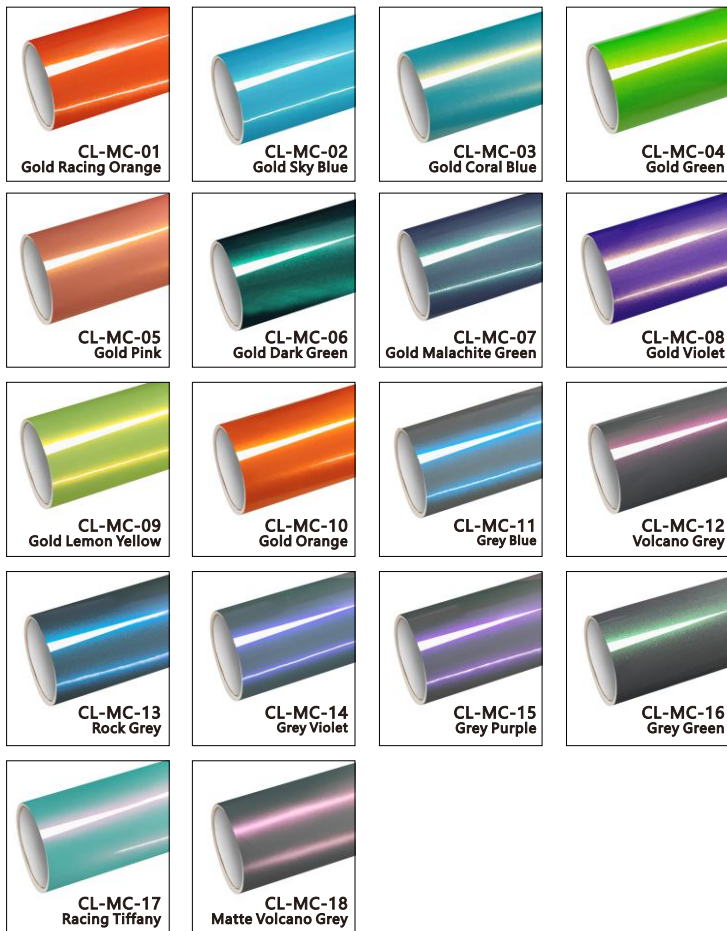

Macaron Vinyl


Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MK
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Chrome Metallic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-CH
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Heavy Metallic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-HV
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

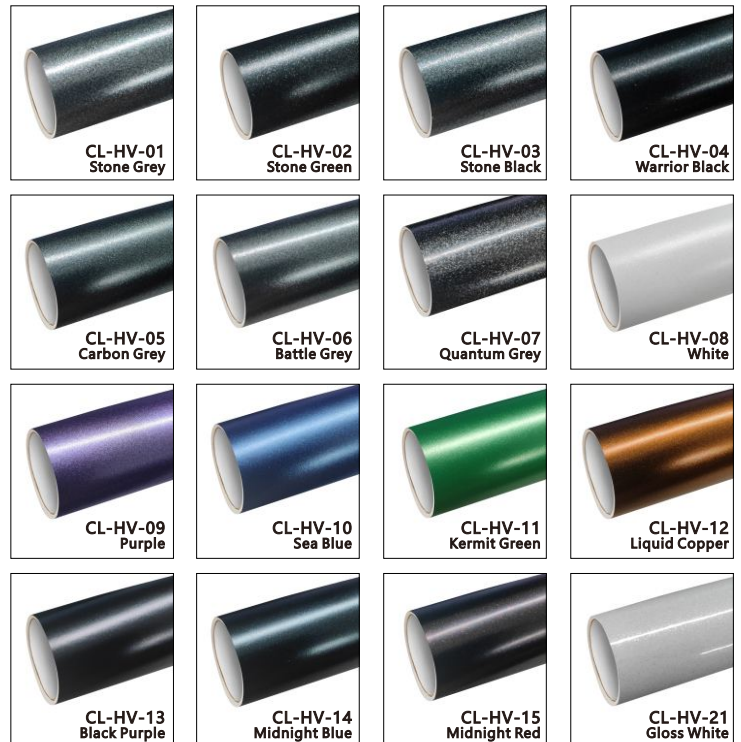

Electro Metallic Satin Vinyl	
Series	3000
Warranty	3 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-ES
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Satin Ceramic Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-MS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Matte Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-SM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Satin Shadow Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-SS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Ultra Matte Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-UM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Ultra Matte Satin Metallic Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-US
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

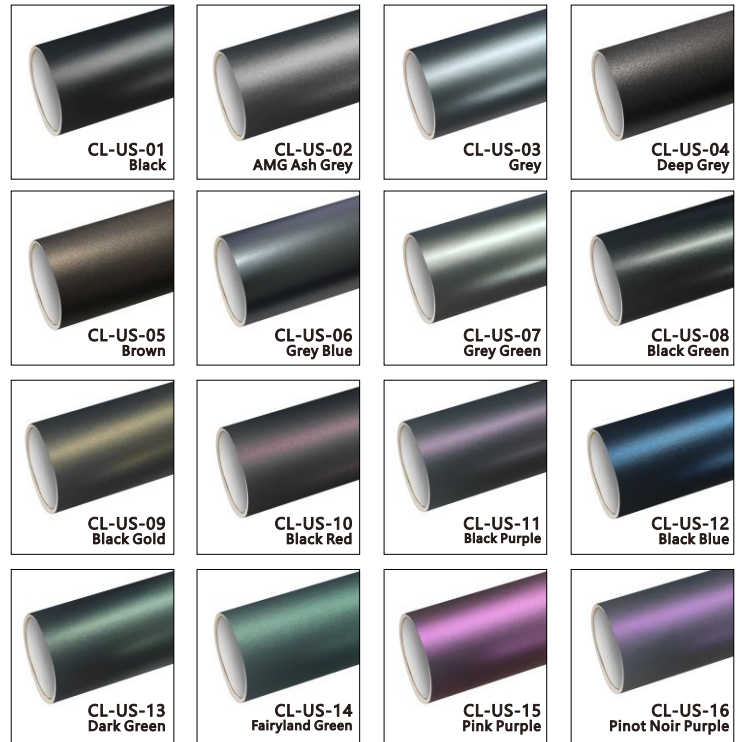

3D Ghost Vinyl	
Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-GH
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Carbon Fiber Vinyl

Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-3DCF/CL-6DCF
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Metallic Brushed Vinyl





Series	3000
Warranty	2 Years
Brand	CARLIKE®
Size	1.52x17M/5x56FT
Model number	CL-AB
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5





Printed Camouflage Vinyl


Series	1000
Warranty	1 Year
Brand	CARLIKE®
Size	1.52x20M/5x65FT
Model number	CL-MC
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years




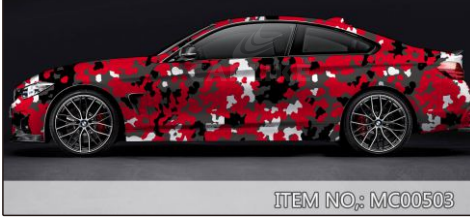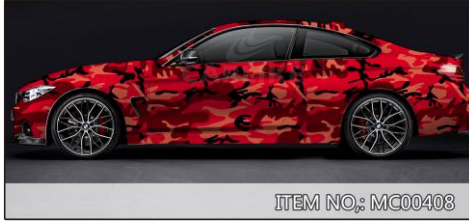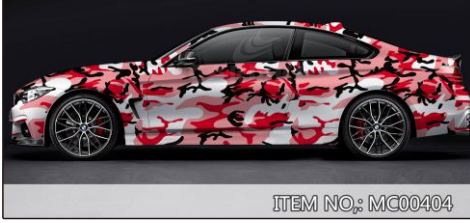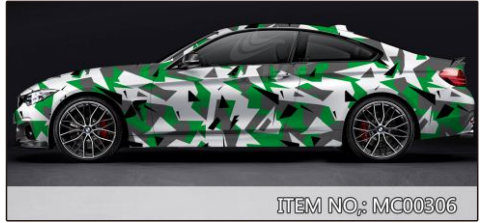



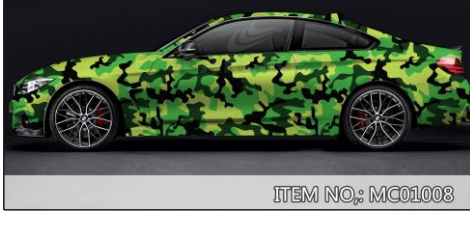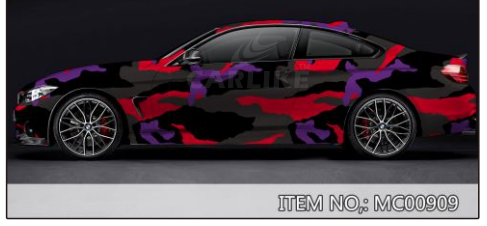

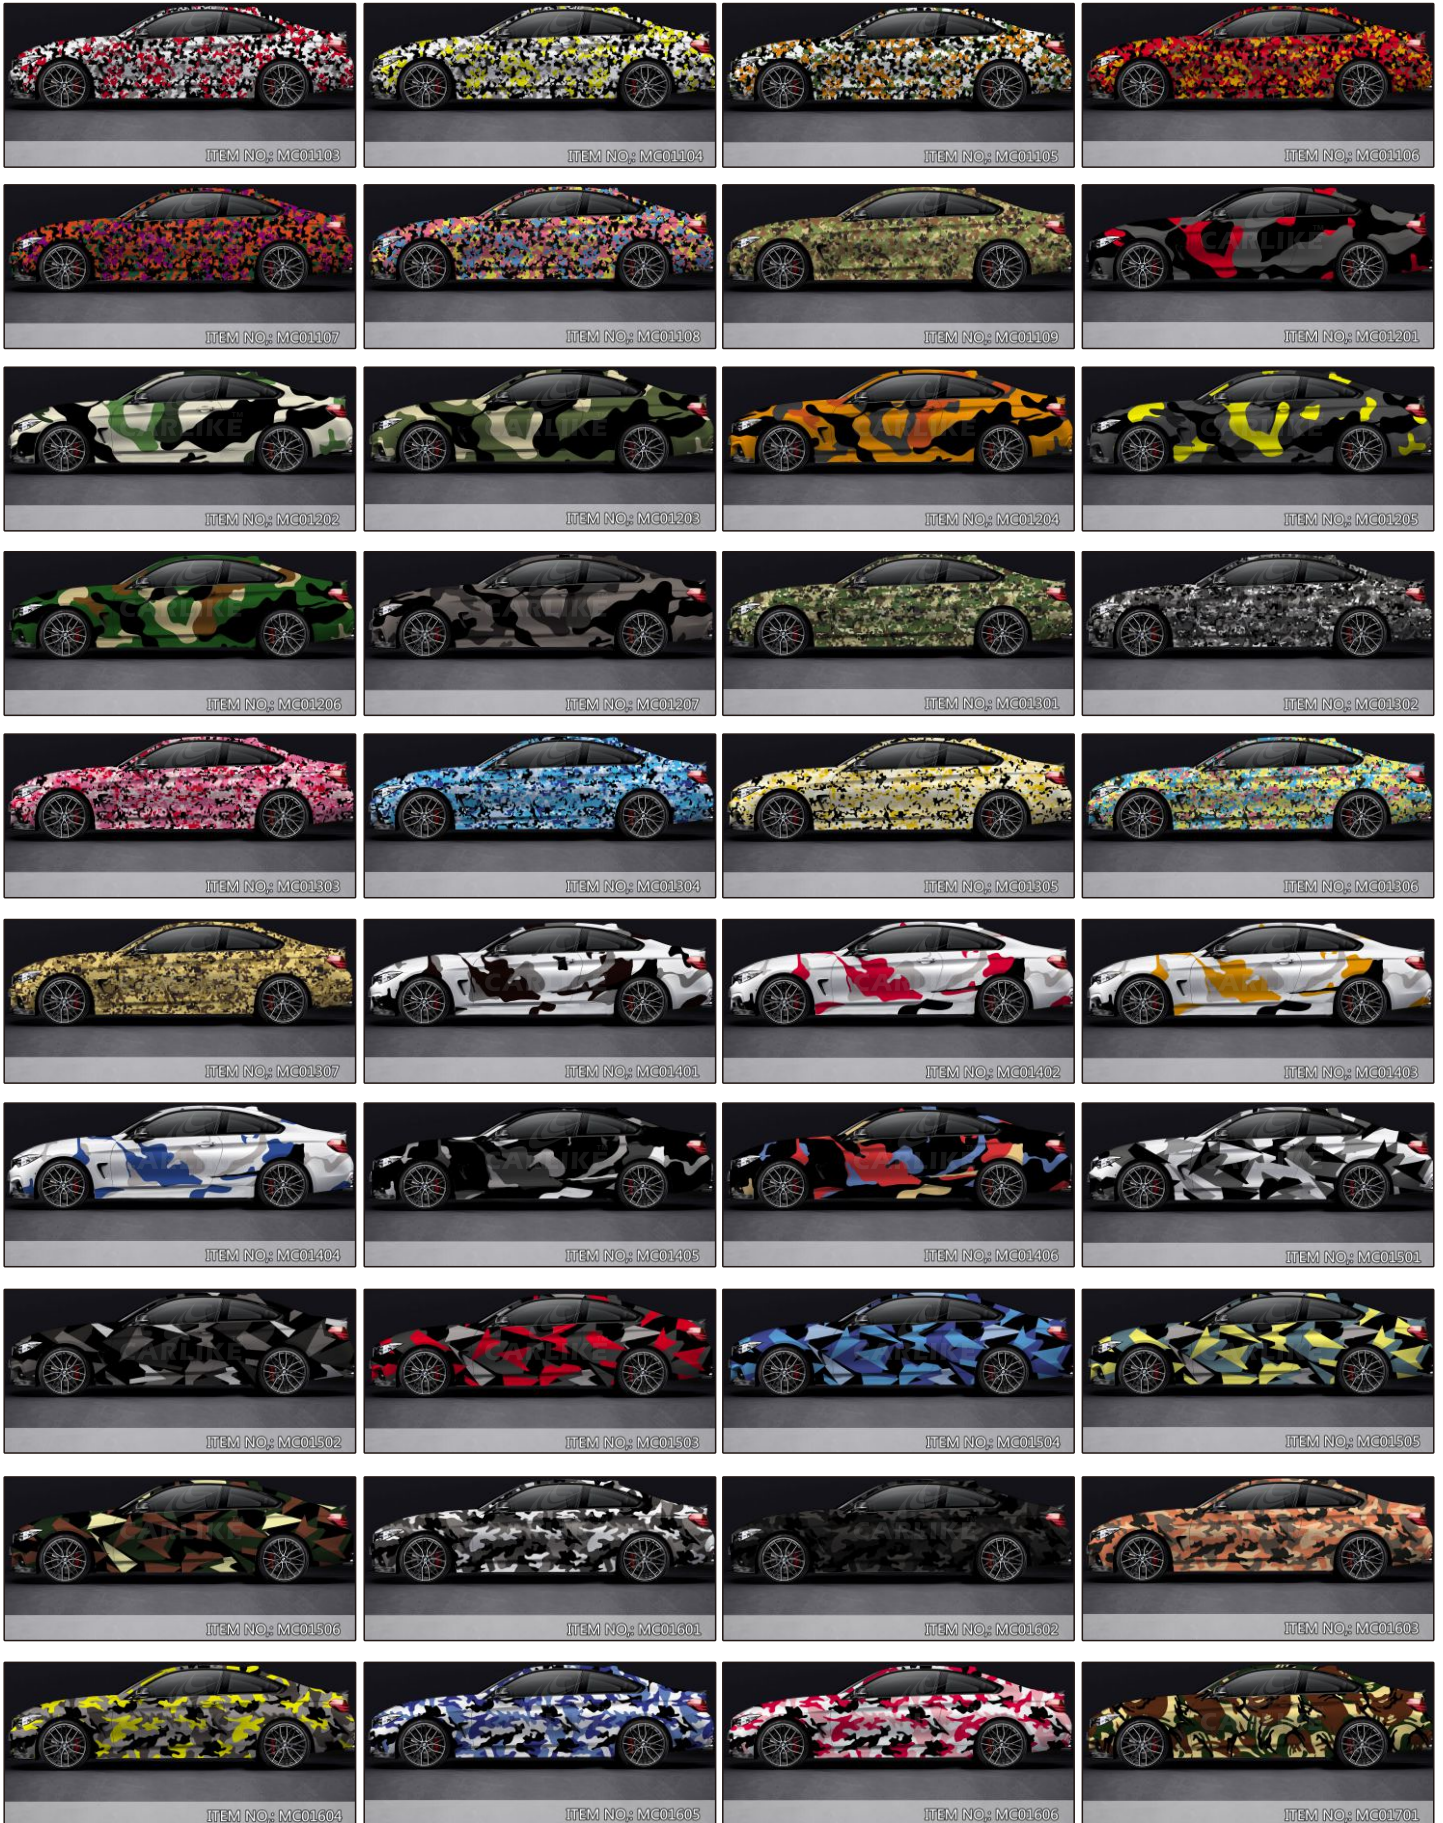

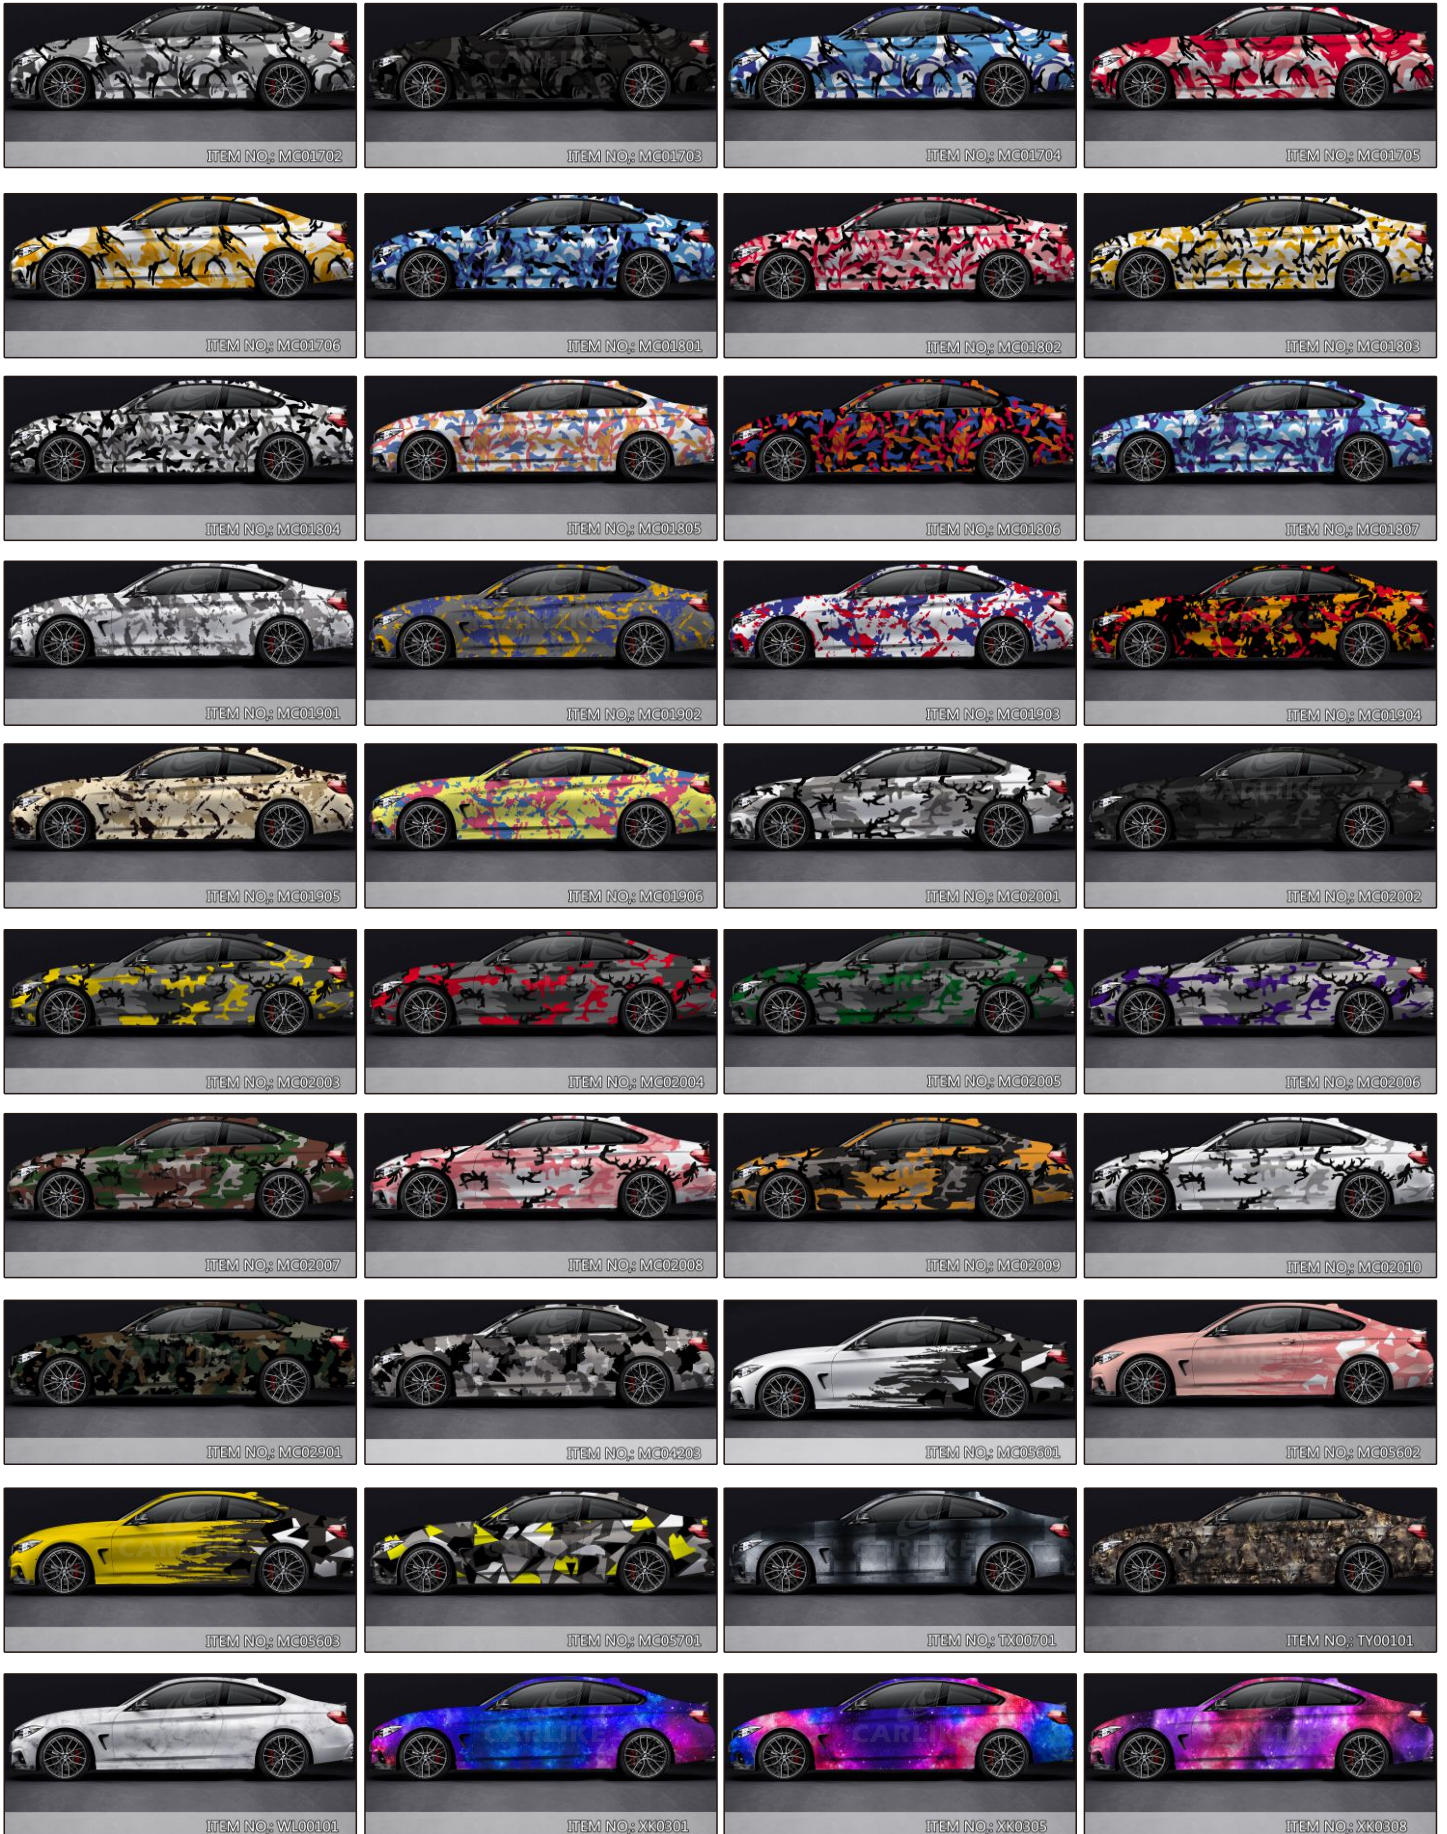

Premium + Printed Vinyl

Series	3000
Warranty	2 Year
Brand	CARLIKE®
Size	1.52x20M/5x65FT
Model number	CL-DZ
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years



DZ001



DZ002




DZ003



DZ004



DZ005

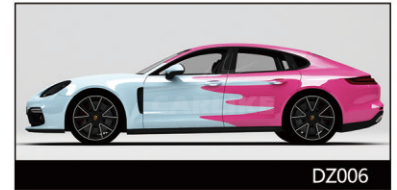

DZ006



DZ007



DZ008



DZ009



JB001



JB002



JB003



JB004



JB005



JB006



JB007



JB008



JB009



JB010



JB011



JB012



JB013



JB014



JB015



JB016




JB017




JB018



JB019

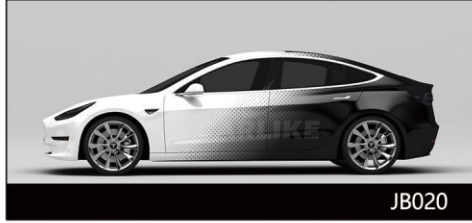

JB020

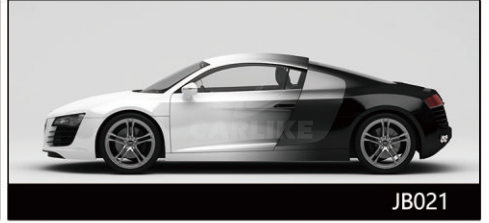

JB021



JB023



JB024



JB025



JB026



JB027



JB028



JB029



JB030



JB031



JB032



JB033



JB034




JB035



JB036



JB037

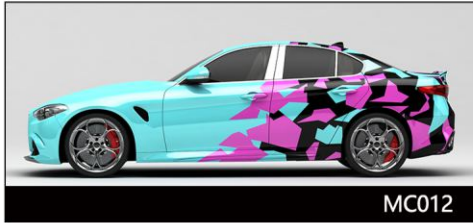

MC012



MC013



MC014



MC015



PM001



PM002



PM003



PM004




PM006



PM007



PM008

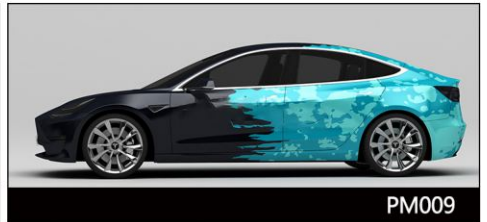

PM009



PM010



PM011



PM012



PM014



SD001



SD002



SD003



SD004




SD005



SD006



SD007

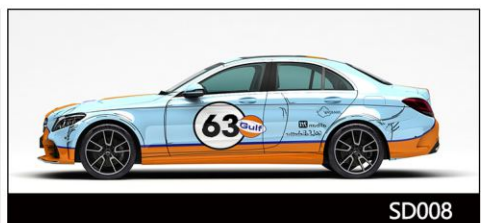

SD008



SD009



SD010



SD011



SD012



SD013



SD014



SD015



SD016



TC001



TC002



TC003



TC004



TC005



TC006




TC007



TC008



TC009

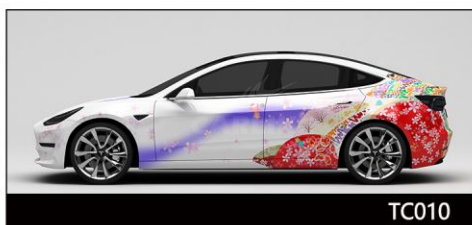

TC010




TC011



TC012



TC013

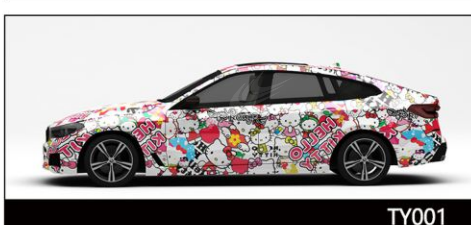

TY001



TY002



TY003



JB038




JB039



JB040



JB041

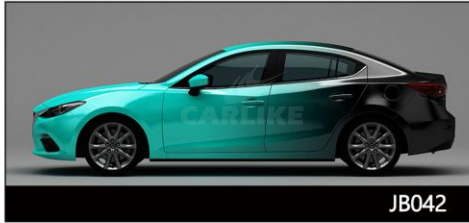

JB042



JB043



JB044



JB045




JB046




JB047



JB048

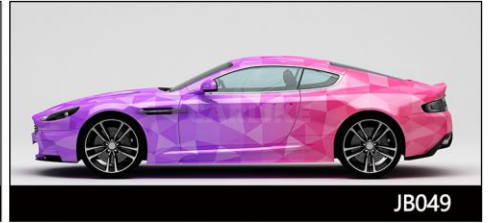

JB049

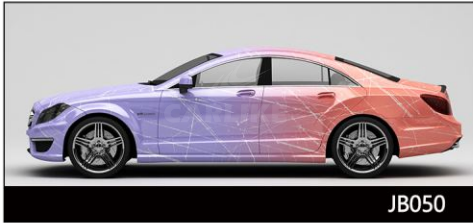

JB050



JB051



JB052



JB053



KT001



KT002




KT003



KT004



KT005

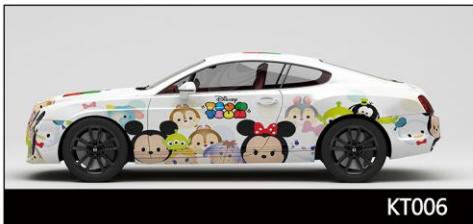

KT006



KT007



KT008



KT009



KT010




KT011



KT012




KT013

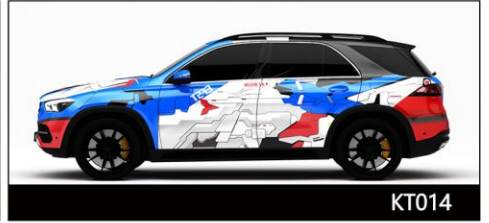

KT014



KT015

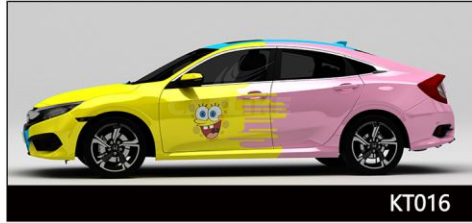

KT016



KT017



KT018



KT019



KT020



KT021



MC001



MC002



MC003



MC004



MC005



MC006



MC007



MC008



MC009



MC010



MC011



TY004



TY005




WL001




WL002




WL003

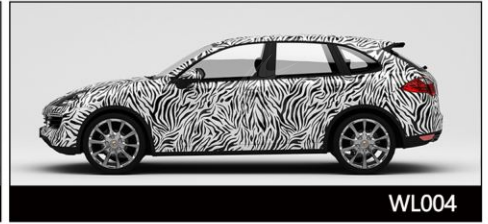

WL004

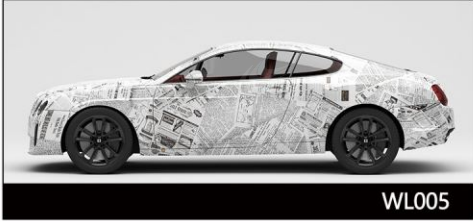

WL005

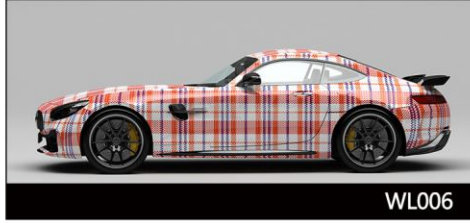

WL006



WL007



WL008



WL009



WL010



WL011




WL012



WL013



WL014

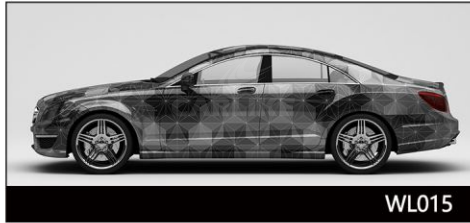

WL015



WL016



WL017



WL018



WL019




WL020











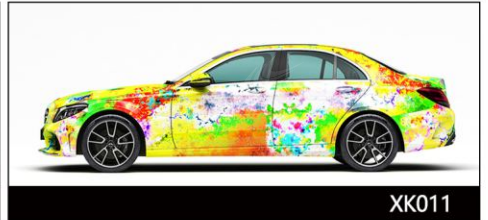




































WL021



WL022



				
SQ1 Squeegee	SQ2 Squeegee	SQ3 Squeegee	SQ4 Squeegee	SQ5 Squeegee
				
SQ6 Squeegee	SQ7 Squeegee	SQ8 Squeegee	SQ9 Squeegee	SQ10 Squeegee
				
SQ11 Squeegee	SQ12 Squeegee	SQ13 Squeegee	SQ14 Squeegee	SQ15 Squeegee
				
SQ16 Squeegee	SQ17 Squeegee	SQ18 Squeegee	SQ19 Squeegee	SQ20 Squeegee
				
T1 Knifeless tape	T2 Woolen squeegee	T3 Squeegee for gap	T4 Cutter	T5 Remove glue squeegee

 <p>T6 Cutter</p>	 <p>T7 Knife</p>	 <p>T8 Knife</p>	 <p>T9 Tools</p>	 <p>T10 Tool box</p>
 <p>T11 Pad for cut vinyl</p>	 <p>T12 Gloves</p>	 <p>T13 Magnet</p>	 <p>T14 Knife</p>	 <p>T15 Primer glue</p>
 <p>T16 Heat gun</p>	 <p>T17 Watering can</p>	 <p>T18 Buckskin sticker for squeegee</p>	 <p>T19 Hood model</p>	 <p>T20 Car model</p>
 <p>T21 3M Primer Glue</p>	 <p>T22 Magnet</p>	 <p>T23 Remove glue squeegee</p>	 <p>T25 Cut pad</p>	 <p>T26 Ceeding tool 4 in 1</p>
 <p>T27 Weeding tool</p>				

APPLICATION INSTRUCTIONS

READ THOROUGHLY BEFORE APPLICATION

The car paint surface must be clean and free of dirt and wax prior to application


Should Apply at temperatures between 80°C and 120°C to a smooth, flat surface.

1. Trim CARLIKE Vinyl Wrap to fit a proper location.
2. CARLIKE Vinyl Wrap is produced with new air bubble free technology, high density air channels, dry application is available, easy to install, and save installation time.
3. Peel off CARLIKE Vinyl Wrap from the liner paper at one end, and place into position on the vehicle. Continue to remove the liner paper as you apply using a squeegee to rub into place.
4. Initial low viscosity glue, adjust positioning the CARLIKE Vinyl Wrap on the car paint more quickly.
5. Inspect the application. Any bubbles can be punctured with razor tip and carefully squeegee down.
6. Allow 24 hours before cleaning vehicle at an automatic or manual high-pressure car wash.

HEAT FORMING

CARLIKE vinyl film can be formed around some compound-curved surfaces using a hair dryer or heat gun. Use the tool to heat the film (2 - 3 seconds) until it softens and begins to wrap itself to the contours/edge of the application surface. While the film is still warm, use a squeegee or fingertips to apply pressure to the film to help shape it to the contours. Be careful not to over-stretch the film when it is heated.

If you wrinkle the film during installation, let it cool and gently lift the film from the surface and re-apply, heat the wrinkled film can be restore flat.

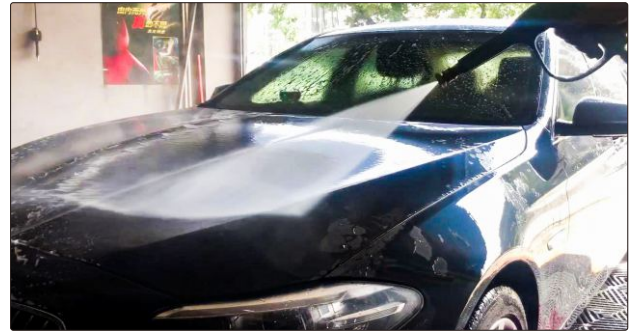

Wash car body



Clean car body gap



Wipe dry car body



1. Measure and cut the size



2. Stick it on car body



3. Use squeegee and heat gun to make it flat



4. Use squeegee get bubble out



5. Cut off extra part



6. Finished

PRODUCT WARRANTY

CARLIKE warranty policy:

About Quality Warranty: During the quality warranty period, the film surface has no obvious fading, no obvious yellowing, no cracking, and no residual glue on the car paint after removable.

After the product is installed, according to the classification of the product, the following quality assurance is provided within the corresponding unified warranty time:

1. Ensure the self-adhesive properties of the film, without non-touch deformation, delamination or natural separation from the car body.
2. Ensure that the appearance of the film surface does not produce obvious sun light fading.
3. Ensure that the film and the paint surface are peeled off with almost no residual glue. The original paint has no shedding damage (the paint is peeled off or damaged in the secondary spray part, which is not within the guarantee range, and the result of the inspection of the paint composition of the authoritative organization shall prevail).
4. CARLIKE® and the construction unit will not be responsible for any damage caused by car body, membrane damage and improper maintenance caused by natural disasters, external forces or strong acid and alkali objects.
5. When the film is removed, it shall be professionally removed by the installer. The film body damage or paint surface damage caused by the owner's unauthorized operation shall not be undertaken by CARLIKE and the install shop.
6. If the scratches or damage caused by human beings can be repaired or replaced by the construction unit, the damaged parts can be repaired at the install shop.



PRODUCT MAINTENANCE

1. In the initial stage after install (within 3 days from the delivery date), the adhesion of the film is relatively low. Just in case, do not touch the film surface, especially the edge portion.
2. In the initial stage after install, there may be a possibility of subsequent generation of bubbles or blisters, which is a normal phenomenon and can naturally disappear after about 10 days. If you are in a hurry, you can go to the construction unit for quick processing.
3. Wash the vehicle after it is completely dry (about 1 week after install).
4. Please avoid using adhesives things to stick the surface of the film.
5. Please avoid using cleaning tools that are easy to damage the membrane surface.
6. Do not use a brush, abrasive or sponge with abrasive to clean the membrane surface.
7. Wipe the surface of the film with a soft damp cloth and water. If you need to use a cleaning agent, use a neutral detergent.





Premium Umbrella


CARLIKE™


PREMIUM™
CAR WRAPPING VINYL

CARLIKE—MAKE YOUR CAR SPECIAL

مظلة التميز لخدمات السيارات

جدة - حي الزمرد - طريق الملك سعود

0597797769-0554474543

الوكيل المعتمد بالمملكة العربية السعودية