

High Quality CCTV Solutions

4MP IP COLOR VERI-FOCAL DOME CAMERA IPRGMDJ5XHS500

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor
- Resolution: 4MP 1080P
- Compression: H.264/H.264+/H.265/H.265+ /MJPEG
- Illumination: 0.01Lux
- Progressive Scan
- Lens: 2.7 ~ 13.5mm Motorize Zoom
- Infrared Distance: 30M
- Support ONVIF 2.4 (Profile S/T/G)

- ✓ ROI
- ✓ BLC
- ✓ WDR
- ✓ D/N
- ✓ Privacy Masking
- ✓ Motion Detection
- ✓ Corridor Pattern



- ✓ Full Starlight
- ✓ Image Config
- ✓ Defog Mode

Reliable Product

- Protocol: TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, UDP
- Triple Video Stream
- Day/ Night Function
- WDR 120dB
- IP67 Housing
- Temperature -20°C ~ +60°C
- Power DC12V±10%, 650mA




AI Function: Face Detection, Intrusion
Detetion, Line Cross Detetion, Loiter Detetion,
People Gather Detecion



Starlight night vision

Normal night vision

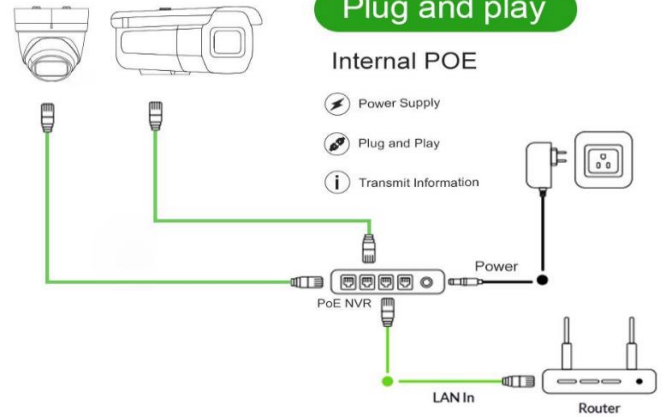

TECHNICAL SPECIFICATION

CAMERA	IPRGMDJ5XH500
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	4MP 1080P
Effective Pixels	2616 (H) x 1964 (V)
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
Minimum Illumination	0.01Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
AI Function	Face Detection, Intrusion Detetion, Line Cross Detetion, Loiter Detetion, People Gather Detecion
LENS	
Focus Length	2.7-13.5mm Motorize Zoom
Focus Control	Auto
Lens Type	Auto
Pixels	4MP
NIGHT VISION	
Infrared LED	42μ x 4PCS
Infrared Distance	30M
IR Status	Auto Control
IR Power On	Smart, Manual & Timed mode
NETWORK	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	YES, Support QR Code
POE	Optional/Internal, Support IEEE 802.3af
Video Delay	0.3S (Within the Lan)
Main/ Sub Streams	Main Stream (1,2,3): 2592*1944@30fps, 2560*1440@30fps, 1920*1080@30fps/ 1280*720@30fps Sub Stream (1,2,3): 1280*720@30fps/ 720*480@30fps, 352*288@30fps Tri Stream: 1280*720@30fps, 720*480@30fps, 352*288@30fps
IE Brower	IE8-11, Google Chrome, Firefox , Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad
GENERAL	
Housing	IP67
IR Cut Filter	YES
Operation Temperature	-20℃ ~ +60℃ RH95% Max
Power Source	DC12V±10%,950mA/ POE
Dimension/ Weight	φ 159 x 132 (H) mm, 1.4Kg