



## High Quality CCTV Solutions

# 2MP HD IP COLOR BULLET CAMERA IPRGMBQ605XHP200

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor
- Resolution: 2MP 1080P
- Compression: H.264/H.264+/H.265/H.265+ /JPEG /AVI /MJPEG
- Illumination: 0.002Lux
- Progressive Scan
- Lens: 2.7-13.5mm Motor Zoom
- Infrared Distance: 40M
- ONVIF 2.4 Compatible
- Focus Control: Auto



- ✓ Day/ Night
- ✓ PAL/ NTSC
- ✓ Defog Mode
- ✓ WDR 120dB



### Reliable Product


- ✓ Corridor Pattern
- ✓ Motion Detection
- ✓ Privacy Masking
- ✓ Image Configuration
- ✓ BLC
- ✓ ROI

- Protocol: TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP, UDP
- Triple Video Stream
- Day/ Night Function
- WDR 120dB
- IP67 Housing
- Temperature -20°C~ +60°C
- Power DC12V±10%,950mA
- Recording Mode: NVR/CMS/Web



**RGM Digital**

No. 100, Section 1, Taiwan Boulevard,  
Central District, Taichung City, Taiwan  
Homepage: [www.rgm-digital.com](http://www.rgm-digital.com)  
[sales@rgm-digital.com](mailto:sales@rgm-digital.com)

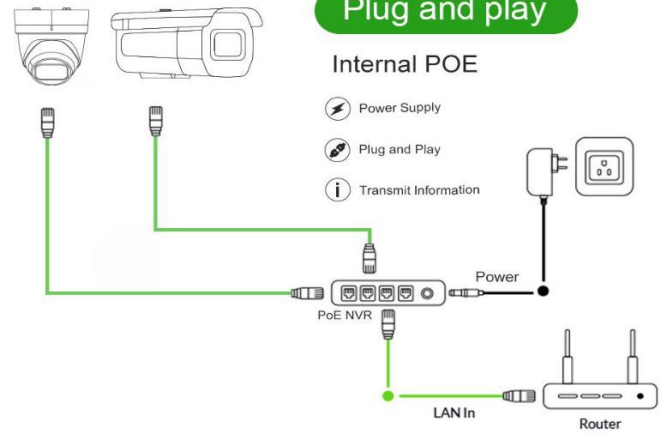

## TECHNICAL SPECIFICATION

CAMERA		IPRGMBQ605XHP200
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor	
Resolution	2MP 1080P	
Effective Pixels	1945(H)*1097(V)	
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG	
TV System	PAL/NTSC	
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	
Minimum Illumination	0.002Lux	
S/N Ratio	≥52dB	
Scanning System	Progressive	
Video Output	Network	
LENS		
Focus Length	2.7-13.5mm Motor Zoom	
Focus Control	Auto	
Lens Type	Auto	
Pixels	3MP	
NIGHT VISION		
Infrared LED	42μ x 4PCS	
Infrared Distance	40M	
IR Status	Auto Control	
IR Power On	Smart, Manual & Timed mode	
NETWORK		
Ethernet	RJ-45 (10/100Base-T)	
Wireless	/	
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP,UDP	
ONVIF	Support ONVIF 2.4(Profile S/T)	
P2P	YES, Support QR Code	
POE	Optional, Support IEEE 802.3af	
Video Delay	0.3S (Within the Lan)	
Main/ Sub Streams	Main Stream1,2,3 (2048*1536@15fps, 1920*1080/30fps, 1280*720@30fps) Sub Stream (720*480@15fps, 720*480@30fps) Tri Stream (352*288@15fps, 352*288@30fps)	
IE Brower	IE8-11, Google Chrome, Firefox , Mac Safari	
Smart Phone	iPhone, iPad, Android, Android Pad	
GENERAL		
Housing	IP67	
IR Cut Filter	YES	
Operation Temperature	-20℃ ~ +60℃ RH95% Max	
Power Source	DC12V±10%,950mA	
Dimension/ Weight	211(W) x 92(H) x 90(D)mm, 1.4Kg	