

TE-68731

Product description



Note: even numbers applicable to RP-62670,
odd numbers applicable to RP-62671.


Item number: 56019549

TR10-2-0-I-S-C-1AF13-1-FG-030-C-F-X-C-1-P-00200-Z017 ANM03000670CA

TR10-2 Internal spring loaded RTD Assembly

Assembly description:	Industrial assembly configured	(0)
Unit of Measure:	Imperial (inch)	(I)
Spring design:	Self gripping spring	(S)
Electrical approval:	CSA Ex-proof Class 1 Division I	(C)
Connection head:	1/4000 F (Aluminum) w/Flame Path	(1AF)
Instrument x Conduit entry:	1/2 NPT x 3/4 NPT	(13)
Terminal block/Transmitter:	Crastin	(1)
Neck extension:	Nipple-Union-Nipple - Galvanized steel	(FG)
N-Dimension:	3.0 inch (76 mm)	(030)
Measuring element:	Pt100, class A (IEC 60751)	(C)
Wiring configuration:	Dual 3-wire	(F)
Temperature range:	-100...+450 °C, wire wound	(X)
Tip construction:	General purpose	(C)
Sensor diameter:	1/4 inch / 0.250 inch (6.35 mm)	(1)
Sheath material:	Stainless steel 316 / 316 L (1.4401 / 1.4435)	(P)
A-Dimension:	2.00	(00200)
Certificates:	Without	(Z)
Approval tags:	Adhesive half-moon tag	(A)
Tagging:	No tag	(N)
Sheath construction:	MI-cable	(M)

Shell				
Purchase Order & Carrier details are to be emailed to indicate either responsibility for delivery to a workplace or a workplace of the recipient after an external route is confirmed				
Purchase Order No.	PO-60727030			
Project Name	Sci-Fit Trial			
Activity Tag Number(s)	PE-62670, PE-62671, PE-62671A, PE-62671B, PE-62671C			
Project Code	06	00	00	00
DWP/ASD ID	3/5	1/1	1/1	0000
Index/ID Title Code(s)				
Code 1	Accepted as Submitted - Final.			
Code 2	Accepted with Comments. Rejected with comments (inserted with Upper and Rejected in final. We will be in touch with you regarding this.)			
Code 3	Review and Resubmit. Express comments, comments and Resubmit. Work in Progress.			
Code 4	Review not required - Do not re-submit			
Code 5	Rejected. Incomplete comments or re-submit after we have NOTed Problem.			
Date:	N/A			

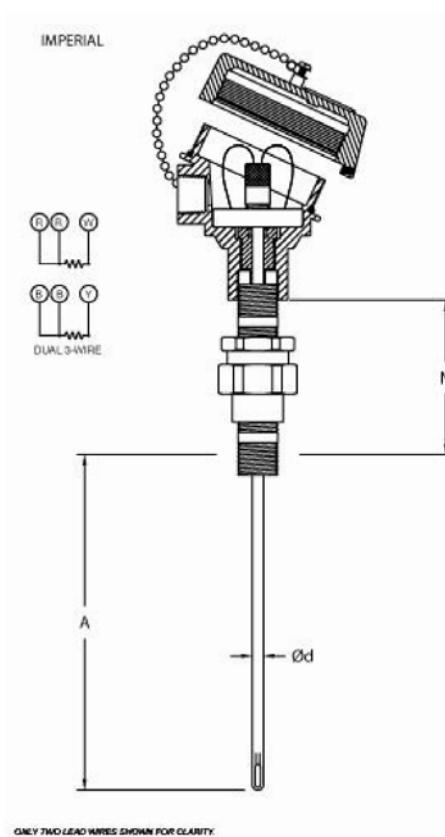

ONLY TWO LEAD WIRES SHOWN FOR CLARITY