Product description

Tag #s for MPP bearing RTDs:
TE-68734
TE-68736
TE-68738
TE-68740
TE-68735
TE-68737
TE-68739
TE-68741

Note: even numbers applicable to RP-62670, odd numbers applicable to RP-62671.

Item number: 56022413

TR10-2-0-I-S-C-1AF13-1-FS-030-C-F-X-C-1-P-00125-Z017 ANM03000595CA

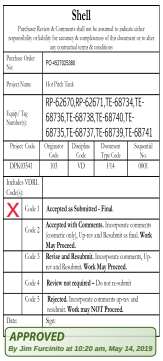
Shell

Purchase Review & Comments shall not be assumed to indicate either responsibility or liability for accuracy & completeness of this document or to alter any contractual terms & conditions

Purchase Order No:	PO-4507025898
Project Name:	Hoo'Doh Tiesk
Equip/ Tag Number(s):	RP-62670,RP-62671,TE-68734,TE-68736,TE-68738,TE-68740,TE-68735,TE-68737,TE-68739,TE-68741

Project Code	Originator Code	Discipline Code	Document Type Code	Sequential No.
DPM10541	103	VD	1F14	0001

Includes VDRL Code(s):

X	Code 1	Accepted as Submitted - Final.
	Code 2	Accepted with Comments. Incorporate comments (comments only). Up-rev and Resubmit as final. Work May Proceed.
	Code 3	Revise and Resubmit. Incorporate comments, Up-rev and Resubmit. Work May Proceed.
	Code 4	Review not required – Do not re-submit
	Code 5	Rejected. Incorporate comments up-rev and resubmit. Work may NOT Proceed.

Date: Sign:

APPROVED
By Jim Furcinito at 10:20 am, May 14, 2019

TR10-2 Internal spring loaded RTD Assembly

Assembly description:	Industrial assembly configured	(0)
Unit of Measure:	Imperial (inch)	(I)
Spring design:	Self gripping spring	(S)
Electrical approval:	CSA Ex-proof Class 1 Division I	(C)
Connection head:	1/4000 F (Aluminum) w/Flame Path	(1AF)
Instrument x Conduit entry:	1/2 NPT x 3/4 NPT	(13)
Terminal block/Transmitter:	Crastin	(1)
Neck extension:	Nipple-Union-Nipple - Stainless steel	(FS)
N-Dimension:	3.0 inch (76 mm)	(030)
Measuring element:	Pt100, class A (IEC 60751)	(C)
Wiring configuration:	Dual 3-wire	(F)
Temperature range:	-100...+450 °C, wire wound	(X)
Tip construction:	General purpose	(C)
Sensor diameter:	1/4 inch / 0.250 inch (6.35 mm)	(1)
Sheath material:	Stainless steel 316 / 316 L (1.4401 / 1.4435)	(P)
A-Dimension:	1.25	(00125)
Certificates:	Without	(Z)
Approval tags:	Adhesive half-moon tag	(A)
Tagging:	No tag	(N)
Sheath construction:	MI-cable	(M)

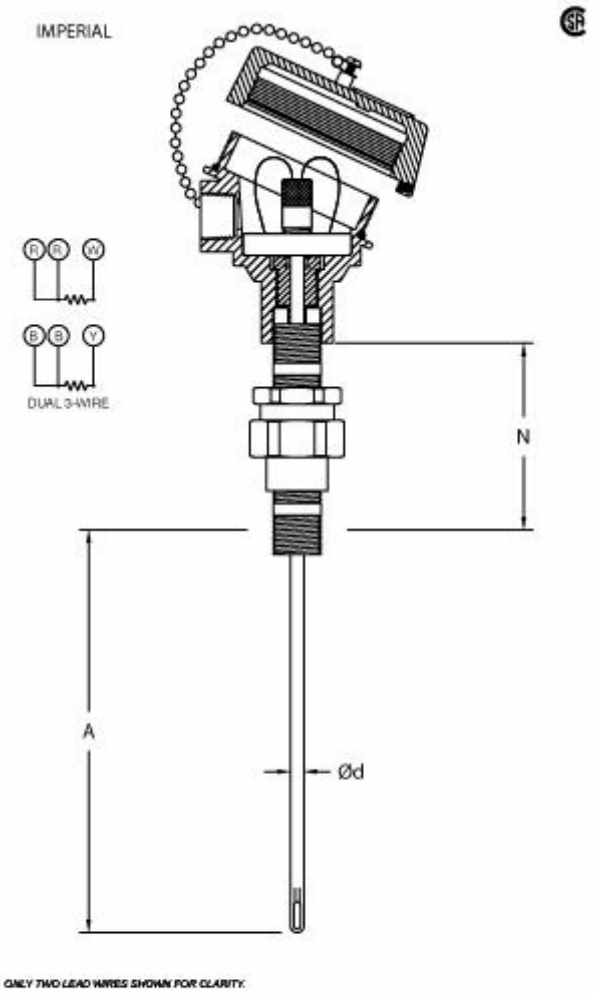

WIKA Instruments Ltd
3103 Parsons Road
Edmonton, AB T5N1C8

http://wika.ca

Phone: 780-463-7035
Fax: 780-462-0017
email: sales@wika.ca